



HAL
open science

Bidirectional Millimeter-Wave Radio-Over-Fiber System Based on Photodiode Mixing and Optical Heterodyning

Flora Paresys, Tong Shao, Ghislaine Maury, Yannis Le Guennec, Béatrice Cabon

► **To cite this version:**

Flora Paresys, Tong Shao, Ghislaine Maury, Yannis Le Guennec, Béatrice Cabon. Bidirectional Millimeter-Wave Radio-Over-Fiber System Based on Photodiode Mixing and Optical Heterodyning. *Journal of Optical Communications and Networking*, 2013, 5 (1), pp.74-80. <10.1364/JOCN.5.000074>. <hal-01742977>

HAL Id: hal-01742977

<https://hal.univ-grenoble-alpes.fr/hal-01742977v1>

Submitted on 2 May 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

BIDIRECTIONAL MILLIMETER WAVE RADIO-OVER-FIBER SYSTEM BASED ON PHOTODIODE MIXING AND OPTICAL HETERODYNING

Flora Parésys, Tong Shao, Ghislaine Maury, Yannis Le Guennec and Béatrice Cabon

IMEP-LAHC, Grenoble INP - Minatec, 3 Parvis Louis Néel - BP 257 - F38016 Grenoble Cedex 1

e-mail : flora.paresys@minatec.grenoble-inp.fr

Abstract - We demonstrate a bidirectional millimeterwave (mmW) radio-over-fiber system based on the use of a p-i-n photodiode (PD) used in non-linear regime. Since frequency down-conversion and photodetection are carried out by a single photodiode, base station (BS) architecture is simplified. Down-link transmission employs optical heterodyning technique for mmW generation and remote local oscillator (LO) delivery to BSs. Up-link scheme uses the electrical port of the PD as an input for optoelectronic mixing with the remotely delivered LO. Up-link and down-link have been successfully demonstrated for 397 Mbps and 794 Mbps binary phase shift keying complying with 60 GHz ECMA 387 standard. Error vector magnitude measurements and theoretical analysis are discussed as regards PD bias conditions. It is shown that PD can be used in this bidirectional system without any switching of the PD bias.

Key words: radio-over-fiber, millimeter wave, bidirectional transmission, photodiode mixing, optical heterodyning, ECMA 387.

I. INTRODUCTION

Radio-over-fiber (RoF) systems operating at millimeter-wave (mmW) frequencies are widely discussed in literature for the provision of future gigabit per second wireless access networks with wider service coverage, and possible integration with future passive optical networks (PON) infrastructures [1, 2]. In order to simplify the design of the base stations (BS), optical domain has been used to offer signal processing functions such as optical mmW generation for the down-link. Recently optical heterodyning systems have been shown great interest to centralize optical mmW frequency generation for the down-link, providing reduction of cost by sharing a single optical modulator to realize mmW generation for many BSs [3] or by using dual baseband/mmW radio modulations for future converged wireless/wireline PON networks infrastructures [4]. Since centralization of signal processing, such as frequency down-frequency, is not possible for the up-link scheme, it makes it too expensive the use of one mmW bandwidth electrical to optical (E/O) transceiver per BS. In [5], a broadband electronic mixer is used for up-link RF auto-heterodyning detection in the BS but it cannot be used for all modulation formats used in the future 60 GHz standards such as ECMA 387. Especially developed devices as mmW bandwidth heterojunction phototransistor (HPT) with

photodetection and mixing capabilities have been especially developed for demonstration of bidirectional mmW over fiber system at data rate 20 Mbps [6]. More recently, 70 GHz bandwidth reflective electro absorption modulator (REAM) have been used for 3 Gbps bidirectional mmW over fiber links [7], but it needs different bias voltages to be used either as an optical receiver or an optical modulator, which supposes remote control of the REAM and fast enough voltage switching time. Even if research work in the last decade has been mostly concentrated on the down-link mmW RoF systems, it is obvious that the cost of a bidirectional system will be dramatically increased by the cost of broadband electronics in BSs for the up-link transmission. Though, one key issue for bidirectional mmW RoF system is to achieve efficient and cost-effective optoelectronic frequency up/down conversions in the BSs.

In this paper, a novel bidirectional mmW RoF architecture is demonstrated based on the use of a commercial off the shelf (COTS) p-i-n photodiode. This photodiode (PD) is used in non-linear regime to perform both photodetection for the mmW RoF down-link and frequency down-conversion for the mmW RoF up-link, without the need of changing PD bias voltage. In the up-link scheme, the so-called PD electrical output is used as an input for the mmW radio signal to realize optoelectronic mixing with remotely delivered LO from the down-link. The down-link scheme uses typical optical heterodyning scheme for mmW generation [4] and the impact of the non-linear PD on down-link performances is investigated. mmW RoF bidirectional system is demonstrated using modulation formats and data rates which are compliant with 60 GHz ECMA 387 standard [8].

The organization of the paper is as follows: Section II briefly introduces the general architecture of the proposed bidirectional mmW RoF system. In section III, investigations on the up-link scheme are presented, leading to optimized PD biasing conditions. Sections IV deals with the influence of the non-linear PD on the optical heterodyning down-link performances.

II. BIDIRECTIONAL MMW ROF SYSTEM SET-UP

The proposed bidirectional RoF system is presented in Fig. 1. In the central station (CS), a single mode distributed feedback (DFB) laser diode (LD) is used to generate a continuous wave (CW) optical signal at wavelength $\lambda_0=1550.7$ nm. To generate two spectral lines with a frequency interval of about 50 GHz, we use a Mach Zehnder Modulator (MZM #1) biased at minimum of transmission and driven by a CW radiofrequency signal at frequency $f_1=26.9$ GHz. MZM#1 optical output signal is then amplified using an erbium doped fiber amplifier (EDFA). To select the two mmW spaced optical spectral lines, the amplified optical signal is sent into a four-channel wavelength demultiplexer (DEMUX) with a channel spacing (BW_{Demux}) of 25 GHz. At WDM demultiplexer channel 2 output, optical field is modulated by using a second MZM (MZM#2 on Fig. 1). MZM#2 is driven in linear regime with a BPSK signal at $f_2=4.52$ GHz for the

down-link operating mode and not modulated for the up-link operating mode, for remote local oscillator (LO) delivery to the BS. MZM#2 optical output is combined to the WDM demultiplexer channel 4 output using a 3 dB optical coupler. A particular attention is paid to adjust the optical delay between the 2 optical paths from WDM demultiplexer to avoid phase to intensity noise conversion [9]. Polarization controllers (PC) are used to combine both optical fields with equal polarizations. After optical coupling, signal is fed into a singlemode fiber. In the BS, a 70 GHz bandwidth p-i-n PD biased in non-linear regime is used either for photodetection process (down-link) or for mmW frequency downconversion process (up-link).

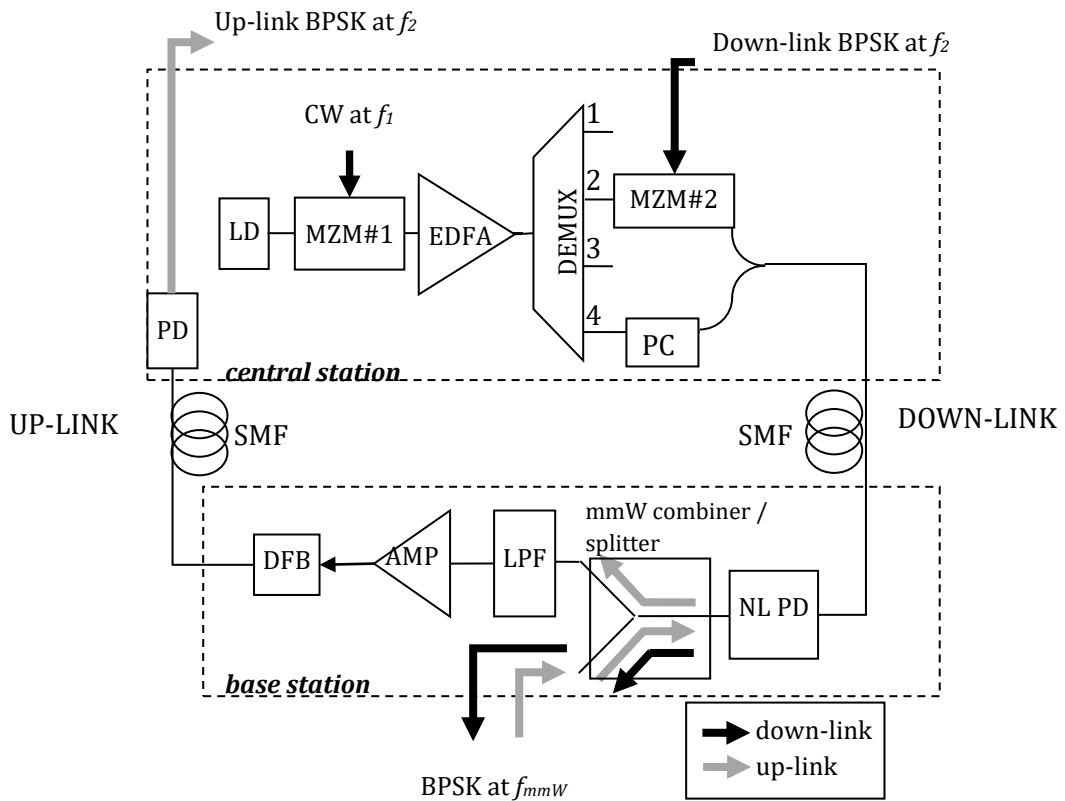


Fig. 1 Bidirectional WDM-RoF system architecture (NL-PD: non-linear PD, AMP: RF amplifier, LPF: low-pass filter).

III. UP-LINK BASED ON PHOTODIODE MIXING

A. Up-link Set-Up

For the up-link operating mode, PD detects a remotely delivered LO signal at $2f_1 = 53.8 \text{ GHz}$ from MZM#1 since no BPSK is applied on MZM#2 (Fig. 1). As shown on Fig. 2, a mmW BPSK signal at frequency $f_{mmW} = 58.32 \text{ GHz}$ and bit rate $D_b = 397 \text{ Mbps}$ or $D_b = 794 \text{ Mbps}$, which complies with the first and second data rates of the 60 GHz ECMA standard [8], is sent to the electrical port of the PD through the mmW combiner. The PD is used as an optoelectronic mixer to down-convert the frequency of the incoming mmW signal to the intermediate

frequency $f_2 = f_{mmW} - 2f_1 = 4.52$ GHz. The unwanted intermodulation products are filtered out using a low-pass filter (LPF). The down-converted radio signal is amplified with a 10 GHz bandwidth amplifier (AMP) with gain $G_{amp} = 45$ dB and finally transmitted back to the CS through an intensity modulation direct detection (IMDD) optical system composed of a DFB laser, a SMF fiber and a 10 GHz bandwidth PD. Up-link signal is analyzed with spectrum analyzer (SA) and digital storage oscilloscope (DSO) at AMP output, demodulation is performed with vector signal analysis software.

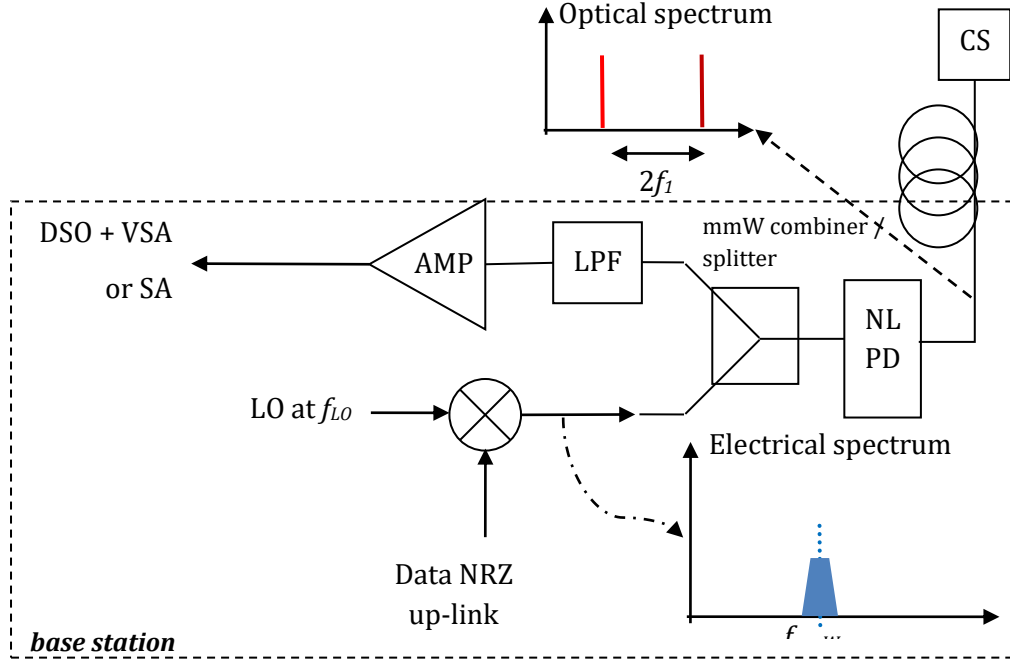


Fig. 2 Experimental set-up for the up-link (NL PD: non-linear photodiode. AMP: RF amplifier. LPF: low-pass filter. LO: local oscillator. NRZ: non-return to zero)

B. Photodiode Biasing For Optimal Mixing

The PD is biased in non-linear regime. The mmW signal at frequency $f_{mmW} = 58.32$ GHz which is electrically fed into the PD produces oscillations of the PD voltage, which results in oscillations of the PD responsivity. As a consequence, the photodetected remote delivered LO signal at $2f_1 = 53.8$ GHz will mix with the mmW signal to generate the down-converted signal at frequency $f_2 = f_{mmW} - 2f_1$. In order to obtain an efficient opto-electronic mixing process, it is necessary to set the PD bias voltage value to maximize the PD non-linearity parameter (A) [10] defined as:

$$A = \eta_{PD} \frac{d\eta_{PD}}{dV_{PD}} \quad (1)$$

where η_{PD} is the photodiode responsivity, V_{PD} is the PD bias voltage.

We have already investigated PD non-linearity parameter in [10]. Measurement of the PD non-linearity parameter has been realized at 60 GHz and has shown a maximum for a reverse bias voltage V_{PD} of 0.3 V.

C. Up-link experimental results and discussion

Fig. 3 shows mixing power and signal EVM at AMP output (Fig. 2), IMDD up-link being transparent for SNR analysis. As expected from the A parameter analysis, optimal mixing power (P_{mix}) is obtained for a PD bias voltage of 0.3 V. EVM as low as 13.1 % for $D_b = 397$ Mbps and 23.5% for data rate $D_b = 794$ Mbps (not reported on Fig. 3) are obtained which comply with the EVM limits for the ECMA 387 standard (33.4 % and 23.7% for data rates $D_b = 397$ Mbps and $D_b = 794$ Mbps respectively) [8].

Dominant noises at photodetection have been identified to be amplified spontaneous emission (ASE) signal beat noise and additive noise from DSO, which variances in current ($\sigma_{ASE/Signal}^2$ and σ_{DSO}^2 respectively) are expressed as :

$$\sigma_{ASE/Sign}^2 = 4\eta_{PD}^2 N_{ASE} P_{PD} BW_{Demux} \quad (2)$$

$$\sigma_{DSO}^2 = \frac{4kT_0 BW}{R_0} NF_{DSO} \quad (3)$$

where N_{ASE} is the ASE power spectral density, P_{PD} is the optical power at the PD input, k is the Boltzmann constant, T_0 is the ambient temperature, R_0 is the DSO input resistor, BW is the BPSK signal bandwidth, NF_{DSO} is the DSO noise figure. As it can be seen from (2) and (3), when PD bias decreases, $\sigma_{ASE/Signal}^2$ drops to the DSO noise floor σ_{DSO}^2 because of the decrease of photodiode responsivity, whereas mixing power reaches a maximum for $V_{PD} = -0.3$ V, which leads to an optimal EVM for the mixing signal at $V_{PD} = 0.15$ V. EVM has been evaluated from SNR calculation derived from output mixing power and noise contributions (2) (3) and reported on Fig. 3. Calculated EVM shows good agreement with measured EVM. EVM analysis shows that PD bias voltage for which minimum EVM is reached does not correspond to the one for which mixing power is maximum, due to the PD responsivity dependent noise contribution.

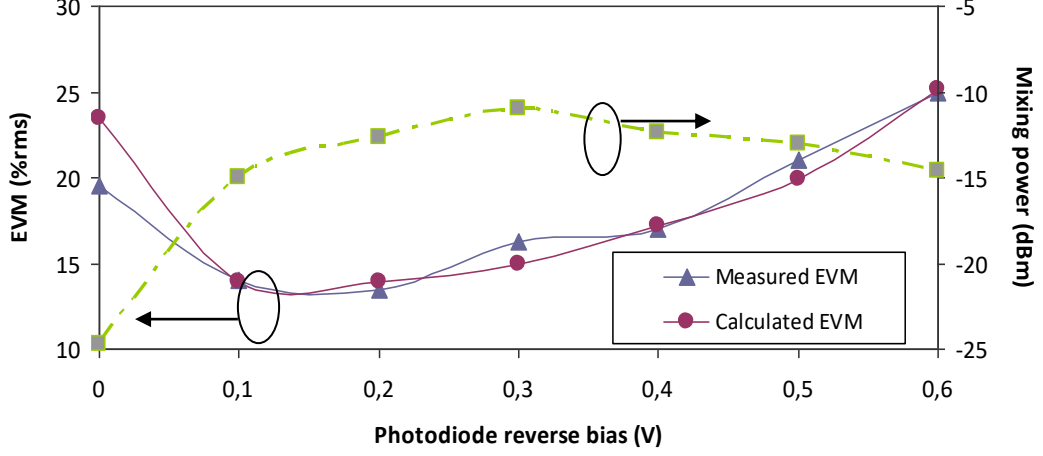


Fig. 3 Up-link experimental and theoretical results for the mixing power and EVM after frequency frequency downconversion as a function of the PD bias voltage for a BPSK data rate of 397 Mbps.

Insertion loss of the wideband combiner (IL_{comb}) is evaluated at 7 dB. The mmW input power ($P_{mmW_{up-link}}$) is set at -8 dBm. PD mixing conversion loss CL_{PD} is defined as:

$$CL_{PD} = P_{mix} - G_{amp} + IL_{comb} - P_{mmW_{up-link}} \quad (4)$$

CL_{PD} is evaluated at -39 dB, which corresponds to typical values found in literature [11] when PD is used as an optoelectronic mixer with 2 input modulated optical signals. It shows that the new PD operating condition proposed in this work, which uses the traditional electrical PD output as a mmW input for the up-link, does not introduce severe additional penalty on the mixing process. The drawback of large conversion loss is partly compensated by the fact that a unique device is used for 2 functions in the bidirectional system: mixing and photodetection.

IV. DOWN-LINK BASED ON OPTICAL HETERODYNING

We have already investigated in [4] a mmW RoF down-link based on optical heterodyning. In this section, we focus on the impact of the PD bias voltage on the down-link performances.

A- Down-Link Set-Up

In the BS, mmW BPSK is generated at frequency $f_{mmW} = 2f_1 + f_2 = 58.32$ GHz by the beating of the optical spectral lines on the PD (Fig. 4). Two main other spectral lines at frequencies $f_{lower} = 2f_1 - f_2 = 49.28$ GHz and $2f_1 = 53.8$ GHz are also photodetected. As seen on Fig. 4, PD output signal is coupled to the mmW combiner of which second output port should be connected to a mmW band-pass filter to suppress undesired spectral lines and sent to the mmW antenna for radio emission. In our set-up (Fig. 4), mmW combiner output is connected to either a 70 GHz SA for power analysis or a mmW electrical mixer to down-convert the mmW BSP signal in the DSO bandwidth of 6 GHz. Waveguide connector of the electronic mixer acts as a 60 GHz -75 GHz band-pass filter, filtering out undesired spectral lines.

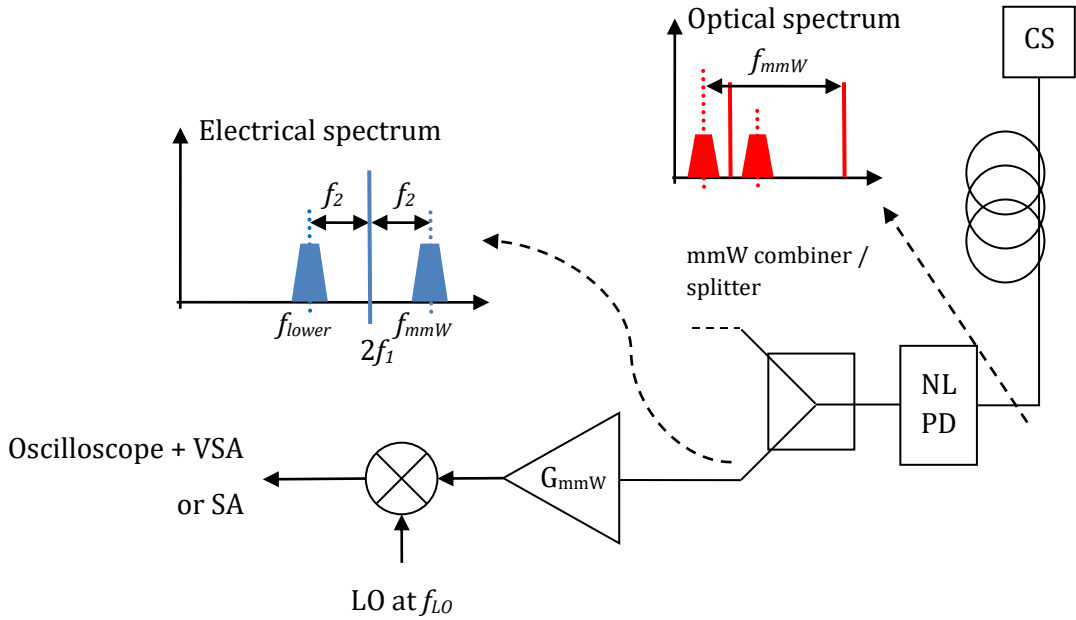


Fig. 4 Experimental set up for the down link

B- Experimental Results For The Down-Link

Experimental results obtained for down-link output mmW power (P_{mmW}) and EVM are reported on Fig. 5, as a function of the PD bias voltage V_{PD} . For V_{PD} higher than 1 V, P_{mmW} stays independent of V_{PD} because the PD works linearly. As seen on Fig. 5, for V_{PD} from 1 V to 0 V, P_{mmW} decreases due to the decrease of the PD responsivity, as discussed in section III. P_{mmW} can be expressed as:

$$P_{mmW} = \eta_{PD}^2 m^2 IL_{comb} P_{PD}^2 \quad (5)$$

where m is the intensity modulation index.

Referring to (2), (3) and (5), we can infer that PD output SNR remains constant as regards V_{PD} when $\sigma_{Sign ASE}^2$ is dominant over σ_{DSO}^2 (for $V_{PD} > 0.15$ V) and decreases when σ_{DSO}^2 is the dominant noise (for $V_{PD} < 0.15$ V). EVM being related to the inverse of SNR, this analysis is compliant with the measured EVM results reported on Fig. 5. For PD reverse bias voltage of 0.15V, there is no penalty on the down-link in terms of SNR (or EVM), compared to the use of the PD in linear regime. Nevertheless, there is a penalty on the generated mmW mixing power of about 4 dB compared to the measured mmW mixing power when the PD is used in linear regime, which could be compensated by increasing the gain of an additional mmW broadband amplifier used before radio emission, in order not to penalize the BS radio coverage.

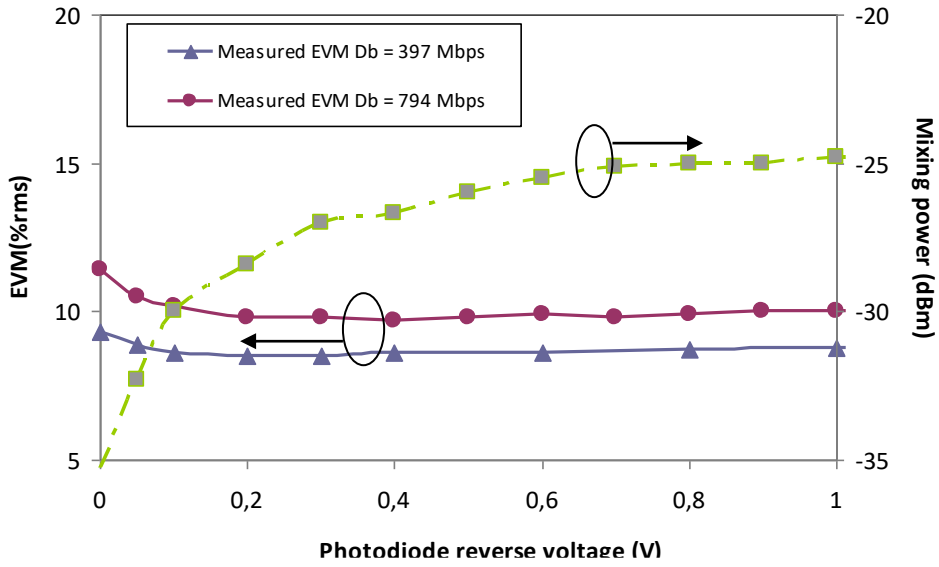


Fig. 5 Down-link experimental results for the mixing power and EVM for the generated mmW BPSK at data rates 397 Mbps and 794 Mbps.

V. CONCLUSION

A new bidirectional mmW BPSK RoF system using a non-linear PD and remote LO delivery is demonstrated. The down-link system, based on optical heterodyning, allows for high data rate mmW generation and remote LO delivery to the BSs. For the up-link, optoelectronic mixing technique, based on the use of a non-linear PD which is fed with mmW BPSK by its RF output connector, is presented and experimentally demonstrated. Optimal PD bias conditions have been discussed regarding mixing power and noise contributions to optimize SNR. Despite large mixing conversion loss, EVM remains in the limit of ECMA 387 standard for data rate up to 794 Mbps. For the down-link system, no penalty on SNR has been observed for the generated mmW BPSK, but a decrease of mmW power of 4 dB has been measured compared to the use of the PD in linear regime. This approach uses COTS photodiode and provides the possibility to

eliminate frequency mixers and oscillators in BSs, it is expected to reduce the complexity and cost of bidirectional mmW RoF base stations.

VI. ACKNOWLEDGEMENT

Authors would like to thank Nicolas Corrao for his helpful support.

VII. REFERENCES

- [1] P. Tien-Thang, Y. Xianbin, T. B. Gibbon, L. Dittmann, and I. T. Monroy, "A WDM-PON-Compatible System for Simultaneous Distribution of Gigabit Baseband and Wireless Ultrawideband Services With Flexible Bandwidth Allocation," *IEEE Photonics Journal, IEEE*, vol. 3, pp. 13-19, 2011.
- [2] W. Yong-Yuk, K. Hyun-Seung, S. Yong-Hwan, and H. Sang-Kook, "Full Colorless WDM-Radio Over Fiber Access Network Supporting Simultaneous Transmission of Millimeter-Wave Band and Baseband Gigabit Signals by Sideband Routing," *IEEE/OSA Journ. of Lightwave Technology*, vol. 28, pp. 2213-2218, 2010.
- [3] J. J. Vegas Olmos, T. Kuri, and K. Kitayama, "Reconfigurable Radio-Over-Fiber Networks: Multiple-Access Functionality Directly Over the Optical Layer," *Microwave Theory and Techniques, IEEE Transactions on*, vol. 58, pp. 3001-3010, 2010.
- [4] T. Shao, F. Parésys, Y. Le Guennec, G. Maury, N. Corrao, and B. Cabon, "Simultaneous Transmission of Gigabit Wireline Signal and ECMA 387 mmW over Fiber Using a Single MZM in Multi-Band Modulation," *Microwave Photonics, IEEE Topical Meeting on*, Oct 18-21, 2011, Singapore.
- [5] C-S Choi, Y. Shoji, H. Ogawa, "Millimeter-Wave Fiber-Fed Wireless Access Systems Based on Dense Wavelength-Division-Multiplexing Networks," *Microwave Theory and Techniques, IEEE Transactions on*, vol. 56, pp. 232-241, 2008.
- [6] C.-S. Choi, J.-H. Seo, W.-Y. Choi, H. Kamitsuna, M. Ida, and K. Kurishima, "60-GHz Bidirectional Radio-on-Fiber Links Based on InP-InGaAs HPT Optoelectronic Mixers," *IEEE Photonics Technology Letters*, vol. 17, no. 12, pp. 2721-2723, 2005.
- [7] B. Charbonnier & al., "Ultra-wideband radio-over-fiber techniques and networks," *Optical Fiber Conference (OFC)*, conference proceedings, 2010.
- [8] <http://www.ecma-international.org/publications/standards/Ecma-387.htm>
- [9] T. Shao, F. Parésys, G. Maury, Y. Le Guennec, B. Cabon, "Investigation on the Phase Noise and EVM of Digitally Modulated Millimeter Wave Signal in WDM Optical Heterodyning System," to be published in *IEEE/OSA Journ. of Lightwave Technology*, 2012.
- [10] F. Parésys, Y. Le Guennec, G. Maury, B. Cabon, Z. Bouhamri, V. Dobremez, "Low cost bidirectionnal QPSK transmission with optical frequency conversion," *Microwave Photonics, 2009 IEEE International Topical Meeting on*, conference proceedings, Valencia, Spain, Oct. 2009.
- [11] S.A. Malyshev, A.L. Chizh, "P-I-N photodiodes for frequency mixing in radio-over-fiber systems," *IEEE/OSA Journ. of Lightwave technology*, vol. 25, n°11, pp. 3236-3243, Nov. 2007.

