



HAL
open science

The effect of Dean, Reynolds and Womersley numbers on the flow in a spherical cavity on a curved round pipe. Part 1. Fluid mechanics in the cavity as a canonical flow representing intracranial aneurysms

Fanette Chassagne, Michael C Barbour, Venkat K Chivukula, Nathanaël Machicoane, Louis J Kim, Michael R Levitt, Alberto Aliseda

► **To cite this version:**

Fanette Chassagne, Michael C Barbour, Venkat K Chivukula, Nathanaël Machicoane, Louis J Kim, et al.. The effect of Dean, Reynolds and Womersley numbers on the flow in a spherical cavity on a curved round pipe. Part 1. Fluid mechanics in the cavity as a canonical flow representing intracranial aneurysms. *Journal of Fluid Mechanics*, 2021, 915, pp.A123. 10.1017/jfm.2020.1114 . hal-03189493

HAL Id: hal-03189493

<https://hal.univ-grenoble-alpes.fr/hal-03189493v1>

Submitted on 9 Apr 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

The effect of Dean, Reynolds, and Womersley number on the flow in a spherical cavity on a curved round pipe. Part 1. Fluid mechanics in the cavity as a canonical flow representing intracranial aneurysms.

Fanette Chassagne^{1†}, Michael C. Barbour^{1†}, Venkat K. Chivukula⁴, Nathanael Machicoane⁵, Louis J. Kim^{2,3}, Michael R. Levitt^{1,2,3}, and Alberto Aliseda^{1,2}

[†] These authors contributed equally to this paper

¹Department of Mechanical Engineering, University of Washington, Seattle, WA 98105, USA

²Department of Neurological Surgery, University of Washington, Seattle, WA 98107, USA

³Department of Radiology, University of Washington, Seattle, WA 98107, USA

⁴Biomedical and Chemical Engineering and Sciences, Florida Institute of Technology, Melbourne, FL 32901, USA

⁵University Grenoble Alpes, CNRS, Grenoble-INP, LEGI, F-38000, Grenoble, France

(Received xx; revised xx; accepted xx)

Flow in side-wall cerebral aneurysms can be ideally modelled as the combination of flow over a spherical cavity and flow in a curved circular pipe, two canonical flows. Flow in a curved pipe is known to depend on the Dean number De , combining the effects of Reynolds number, Re , and of the curvature along the pipe centreline, κ . Pulsatility in the flow introduces a dependency on the Womersley number Wo . Using stereo PIV measurements, this study investigated the effect of these three key non-dimensional parameters, by modifying pipe curvature (De), flow-rate (Re), and pulsatility frequency (Wo), on the flow patterns in a spherical cavity.

A single counter-rotating vortex was observed in the cavity for all values of pipe curvature κ and Re , for both steady and pulsatile inflow conditions. Increasing the pipe curvature impacted both the flow patterns in the pipe and the cavity, by shifting the velocity profile towards the cavity opening and increasing the flow rate into the cavity. The circulation in the cavity was found to collapse well with only the Dean number, for both steady and pulsatile inflows. For pulsatile inflow, the counter-rotating vortex was unstable and the location of its centre over time was impacted by the curvature of the pipe, as well as the Re and the Wo in the freestream. The circulation in the cavity was higher for steady inflow than for the equivalent average Reynolds and Dean number pulsatile inflow, with very limited impact of the Womersley in the range studied.

Key words: Dean Number, Reynolds Number, Womersely Number, Cavity Flow, Flow in Curved Vessels, Hemodynamics, Cerebral Aneurysm

[†] Email address for correspondence: fchassag@u.washington.edu

1. Introduction

Understanding the fluid dynamics at the neck and inside the sac of intracranial aneurysms, and its dependence on anatomical and physiological parameters that change from case to case, is essential to quantify the changes in haemodynamics introduced by endovascular treatment, and in particular by Flow Diverting Stents (FDS) (Texakalidis *et al.* 2019) (Fukuda *et al.* 2019) (Wan *et al.* 2019). Flow patterns such as strong inflow jets in the aneurysmal sac have been found to be detrimental to treatment with flow diverters (Chen *et al.* 2019) (Su *et al.* 2020), whose goal is the formation of a stable thrombus for successful treatment (Rajah *et al.* 2017). These studies provide evidence that the haemodynamics have a controlling effect on thrombosis through the Lagrangian residence time of platelets and the Eulerian Wall Shear Stress (WSS) on endothelial cells (Ngoepe *et al.* 2018).

More generally, despite not being fully understood, the mechanisms involved in the initiation, growth and rupture of aneurysms are considered to be strongly linked to the mechanical stresses applied on the vessel wall by the fluid, and more specifically their tangential component, WSS (Meng *et al.* 2014).

To understand the fluid mechanics of intracranial aneurysms, specifically side-wall aneurysms, flow in the aneurysmal sac can be interpreted as a combination of two canonical flows: flow over a cavity (the aneurysmal sac), and flow in a curved pipe (the parent vessel). These two flow configurations are relevant in a number of industrial and engineering process including internal flows through pipe networks, and external flows over wheel wells, fuel vents and landing gear bays (Sarno & Franke 1994). As a result, they have both been studied and characterized extensively, but independently (Dean 1928; Eustice 1910; McConalogue & Srivastava 1968; Collins & Dennis 1975; Weiss & Florsheim 1965; Burggraf 1966; Pan & Acrivos 1967).

The defining characteristics of steady, viscous flow in a curved circular pipe are a shift in the maximum axial velocity towards the outer wall and the development of secondary flow vortices (Williams *et al.* 1902; Eustice 1911, 1910). In a theoretical analysis performed by Dean (1927, 1928) and later expanded upon by McConalogue & Srivastava (1968), the flow solutions are shown to be dependent on a single non-dimensional number, later termed the Dean number: $De = Re\sqrt{\kappa D/2}$, where D is the pipe diameter, κ is the pipe centreline curvature, and Re is the Reynolds number of the flow in the pipe. The magnitude of the secondary flow, or Dean vortices and the outward radial shift of the maximum axial velocity were shown to increase with De up to $De = 606$ in these first analytic solutions. Later, finite-difference solutions showed that these trends continue for the entirety of the laminar range, $De = 0 - 5000$ (Collins & Dennis 1975).

Pulsatile flows in a straight pipe have also been widely studied and theoretical analysis showed that they depend on a single non-dimensional number: the Womersley number $Wo = R\sqrt{\frac{2\pi}{T\nu}}$ where R is the radius of the pipe, T is the period of the flow and ν is the kinematic viscosity of the fluid (Womersley 1955). In addition to the dependence on the Womersley number Wo , pulsatile flows in curved pipes have also been shown to depend on the Dean number De (Hamakiotes & Berger 1988).

Flow over and inside of square cavities has been studied exhaustively since the 1960s, with some of the more notable early works showing that two primary flow topologies exist for cavities of finite aspect ratio (Weiss & Florsheim 1965; Burggraf 1966; Pan

& Acrivos 1967; Shen & Floryan 1985). At a $Re \gtrsim 100$, the bulk flow separates near the cavity/freestream interface and a primary recirculating vortex develops near the centre of the cavity, growing to fill more of its volume with increasing Re . At sufficiently high Re , the cavity consists of an inviscid vortex, and viscous effects are isolated to the boundaries. However, at low Re , the bulk flow expands into the cavity at the leading edge, exits at the trailing edge, and does not separate into a recirculating vortex. At all Re , small recirculation vortices are found in the corners (Moffat vortices). In a problem with greater relevance to aneurysm flow, Higdon (1985) studied shear flow over a flat plate with a circular cavity. Flow patterns inside the cavity were studied at different depression angles, with a depression angle, $\alpha = 0$, representing the limiting case of no cavity (just the flat plate) and $\alpha = 90^\circ$ representing a semi-circular cavity. Below $\alpha = 68^\circ$, flow enters the cavity at the leading edge and exits at the trailing edge remaining attached to the cavity wall. At deeper angles of depression, flow separation occurs and recirculation, counter-rotating to the freestream, occurs. At $\alpha = 135^\circ$, a geometry that largely resembles an idealized aneurysm, the cavity flow is dominated by a single recirculating vortex and very little disturbance to the freestream flow field. Sobey (1980) extended the analysis of flow over a cavity by investigating the effect of unsteady, or pulsatile, freestream flow. This work showed that the occurrence of separation for unsteady flow is dependent on the relationship of two opposing pressure gradients: a positive pressure gradient which is proportional to the acceleration of the freestream flow, and a negative pressure gradient at the leading edge of the expansion due to a deceleration of the fluid entering the cavity. Separation may occur when the magnitude of the freestream flow pressure gradient (rate of acceleration) decreases below a certain threshold and the adverse pressure gradient dominates. This condition for separation was shown to be a function of Re and Strouhal (Womersley) numbers.

More recently, the haemodynamics of intracranial aneurysm has been studied numerically and experimentally, for idealized or patient-specific geometries (Sforza *et al.* 2009). Asgharzadeh & Borazjani (2016) numerically investigated the effect of the Re and Womersley Wo numbers for a straight parent vessel and a patient specific geometry, and showed that these parameters impact the propagation of the vortex ring formed at the neck. These results differ from the observations made by Le *et al.* (2010), showing that the Wo number does not affect the flow dynamics but that the amplitude of the pulsatile inflow does. Other studies on the haemodynamics of idealized aneurysmal geometry investigated the effect of different geometrical parameters (Imai *et al.* 2008) (Nair *et al.* 2016). More specifically, (Imai *et al.* 2008) highlighted the impact of the geometry of the parent vessel on the inflow pattern and flux, in a numerical study. By studying the haemodynamics in spherical aneurysmal sac attached to parent vessels with different curvatures and orientations and for steady-inflows, they observed that the secondary flow generated in the parent artery dominates the inflow into the aneurysm cavity. Epshtein & Korin (2018) also demonstrated, in their experimental study performed in idealized aneurysm geometries, that higher curvature of the parent vessel led to a lower washout time, but that changes in the pulsatility of the inflow had negligible effect on the washout.

In this context, the present study aims to investigate the full parameter range of inertia: convective, pulsatile and centrifugal, through a wide range of values in the physiological and anatomical range. Thus, the effect of the centreline curvature, flow rate and pulsatility of the parent vessel (i.e. a curved pipe) on the intra-aneurysmal haemodynamics is studied quantitatively (i.e. the fluid dynamics inside the spherical cavity), and its effect on the treatment with flow diverting stents (addressed in the Part

2 companion (Barbour *et al.* 2021)). The effect of the curvature, characterized by the Dean number, De , is assessed for different flow rates in the parent vessel and under steady and unsteady flow conditions, i.e. for varying Re and Wo number.

2. Experimental Methods

2.1. Flow Model

Four models with varying curvature κ were created for the study. In all models, the spherical cavity had a diameter of 7 mm and the round pipe had a diameter of 4 mm (Figure 1). The spherical cavity was connected to the curved pipe so that the cavity opening length (along the flow path) was constant at 5 mm, corresponding to an angle between the spherical surface and the pipe equal to $\alpha = 144^\circ$. The pipe diameter, cavity diameter, and cavity opening width are chosen such that the models are represented of a typical sidewall aneurysm found within the circle of Willis (Parlea *et al.* 1999). The curvature of the pipe centreline varied in the range $\kappa = 0, 0.0625, 0.14$ and 0.22 mm^{-1} ($R_c = \infty, 16, 7, 4.5 \text{ mm}$, respectively). The angle between the two straight sections of the pipe, upstream and downstream of the cavity was constant at 60° . As a result, the arc-length of the curved section of the pipe differed between models.

To create the transparent flow models, a ‘positive’ print of the interior of the model was first made from PolyLactic Acid (PLA, Flashforge, Rowland Heights, California, USA). This part was coated with mold release (XTC-3D, Smooth-on, Macungie, PA) and cast in silicone rubber (OOMOO 25, Smooth-on, Macungie, PA, USA). This mold was then carefully split along the pipe centreline, the PLA positive was extracted, and water soluble wax (Freeman Optical Soluble Wax, Freeman Manufacturing and Supply Company, Avon, OH) was poured into the negative silicone rubber mold and cured. The positive wax part was removed from the mold, placed in the centre of an acrylic box and cast into an optically transparent silicone elastomer (Sylgard 184, Dow Corning Corp, Auburn, MI, USA). The resultant silicone model was placed in a water bath to dissolve the positive wax part and produced an optically clear *in vitro* flow model with the characteristics of the geometry under study (Chivukula *et al.* 2019).

The working fluid was a 47.5:35.8:16.7 water:glycerin:NaCl mixture (by weight) with a viscosity of 3.8 cP. This was chosen to match the index of refraction of the silicone models, avoiding refraction artifacts in the imaging of the flow.

2.2. Flow Analysis

Steady flow was generated by a constant hydrostatic pressure in a reservoir connected through an open flow loop to the model. Flow rate was controlled using a high precision needle valve and measured using an ultrasonic flow-meter (Titan, Dorset, UK) downstream of the flow phantom. The flow rates used in the experiments were chosen to produce Re_{pipe} equal to 120, 240, 360, and 480, covering the full range of Re in the human internal carotid artery Ford *et al.* (2005).

Unsteady flow conditions were created by a pulsatile pump (Harvard Apparatus, Boston, MA) that was connected to the flow model in the test section by rigid tubing (Figure 2). The time-averaged Reynolds number, \bar{Re}_{pipe} , was controlled to match exactly the four values of Re used in the steady experiments: 120, 240, 360, and 480. Two frequencies were chosen for the periodic unsteady inflow: 0.8 Hz and 1.6 Hz (\approx

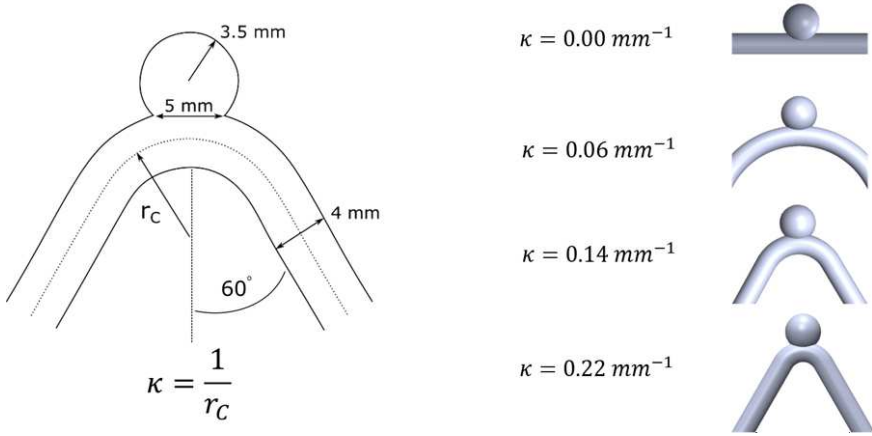


Figure 1: Sketch of the curved pipe with a spherical cavity with the key geometrical parameters used to define the study and the four different models with varying centreline curvatures ($\kappa = 0, 0.0625, 0.14$ and 0.22 mm^{-1})

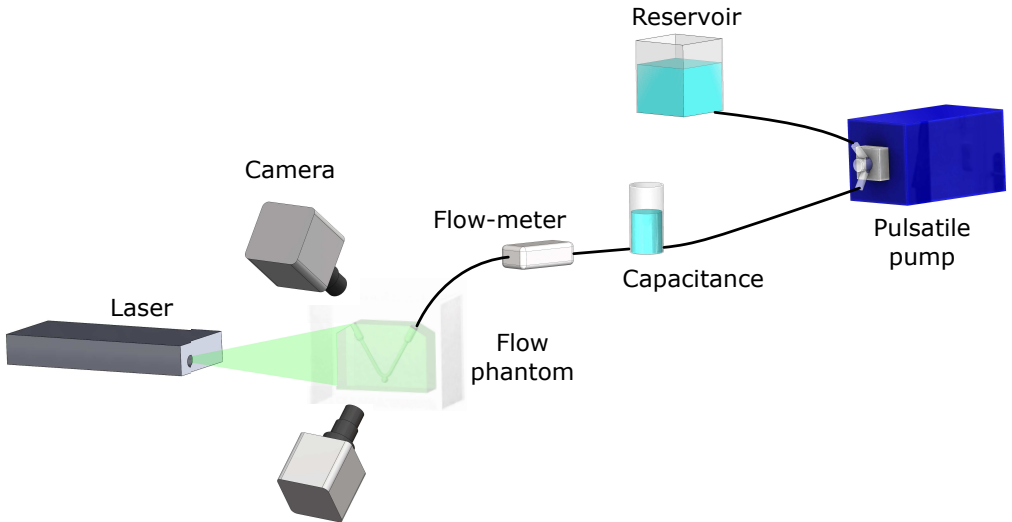


Figure 2: Schematics of experimental configuration

50 and 100 cycles per minute). These frequencies resulted in Womersley numbers Wo equal to 0 (steady), 2.6 and 3.6. The peak Re for all unsteady experiments was set to be double the time-average. The acceleration phase was set to be shorter than the deceleration phase (40/60 % of the time period) to accentuate the unsteady acceleration and move away from a pure harmonic inflow.

Stereoscopic PIV measurements of flow inside the flow phantoms were made with a solid-state dual head laser emitting short ($\mathcal{O}(10^{-8} \text{ s})$) pulses of visible light at 527 nm (TerraPIV, Continuum, San Jose, CA), and two high-resolution, high-speed cameras (Phantom v641, Vision Research, Wayne, NJ). The models and laser plane were arranged so that the laser plane was oriented in the streamwise direction, traversing down through

the top of the cavity and across the pipe, as sketched in Figure 2. PIV measurements were collected at the plane of symmetry of the model, with a laser plane thickness of 1.5 mm. The fluid was seeded with 10 μm diameter hollow-glass spherical particles (TSI, Shoreview, MN). For the analysis of the steady flow, 2500 image pairs were recorded for each experimental condition, with the frame rate of the cameras varying from 200 to 500 Hz as the Re or Wo numbers increased. For the pulsatile flow, a total of 5800 image pairs were analysed for each case, to achieve fully converged phase-averaged statistics.

The quality of the measurements depends critically on the stereoscopic calibration procedure. A clear target with a grid of black dots was submerged in the tank, filled with the same water:glycerin:NaCl fluid used inside the flow models. The target was traversed perpendicular to the imaging plane and imaged at 9 positions spanning the laser plane thickness.

Velocity fields, \mathbf{u} were calculated at the plane of symmetry for each of the four models and all flow conditions. The experimental parameters varied with the length of the cycle (frequency of the inflow) and the Re in the freestream. For the steady inflow conditions, velocity measurements were obtained separately in the freestream and in the cavity. As the velocity magnitude inside the cavity is almost an order of magnitude lower than that in the curved pipe. PIV image collection and analysis was performed separately, with different experimental parameters (acquisition frequency and Δt between each pair of images), for the curved freestream and the cavity flow domains. For the pulsatile inflow conditions, velocity fields were only obtained inside the cavity.

2.3. Analysis of velocity fields

The stereo PIV measurements provide the 3 components of the velocity field in the plane of symmetry of the aneurysm geometry 3. Several metrics were derived from the analysis of these 2D velocity fields. The fields obtained for several cycles were averaged onto one cycle. The velocity at the opening of the cavity (i.e. the aneurysm neck) \bar{u} was computed by integrating the inward velocities along the opening of the cavity:

$$\bar{u} = \frac{1}{L_1 - L_0} \int_{L_0}^{L_1} \mathbf{u} \cdot \mathbf{n} \, dl \quad (2.1)$$

L_0 and L_1 being the boundaries of $\mathbf{u} \cdot \mathbf{n}$ being positive. This velocity is representative of the amount of flow entering the cavity. The Reynolds number at the opening $Re_{opening}$ was computed from this velocity: $Re_{opening} = \bar{u} D_{opening} / \nu$. The circulation in the aneurysm Γ was computed as the space integral of the vorticity over the area of the cavity. Finally, the location of the centre of the vortex was defined as the location of the minimum velocity magnitude in the cavity.

3. Results

3.1. Steady Flow

3.1.1. Flow Field Topology

The velocity fields in the spherical cavity are shown in Figure 3. The colour represents the out-of-plane velocity and the vectors represent the in-plane velocity. The grey intensity of the vectors is proportional to the in-plane velocity magnitude. The flow in the curved pipe is from left to right. For all experimental conditions (flow rates, Q_{pipe} ,

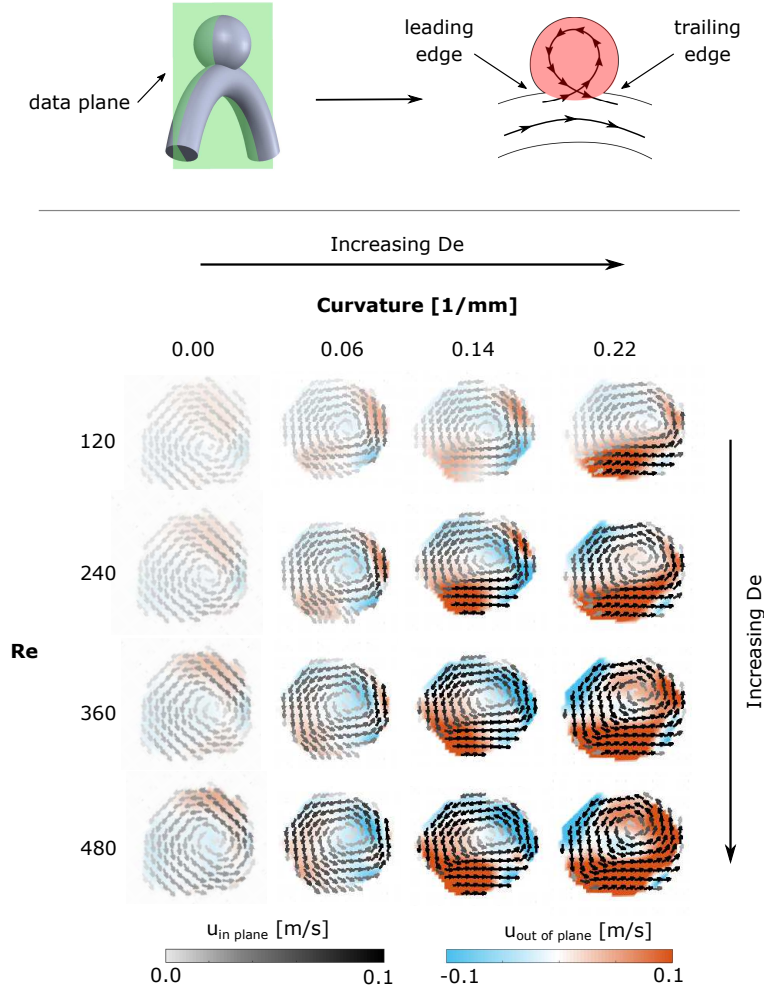


Figure 3: Velocity fields in the cavity in the plane of symmetry of the aneurysm geometry (highlighted in red in the schematic of the aneurysm geometry). The colours represent the magnitude of the out-of-plane velocity and the vectors represent the in-plane velocity. The vectors' grey intensity is proportional to the in-plane velocity magnitude. Columns from left to right correspond to increasing freestream curvature κ and the rows from top to bottom correspond to increasing inflow Q_{pipe} (i.e. increasing Re).

and pipe curvatures), the flow separates at the leading edge of the cavity. The flow enters the cavity at the trailing edge (downstream), expands into it, rotating counter clockwise, and exits at the leading edge (upstream) (Figure 3). The flow separation from the pipe wall at the leading edge brings the vorticity from the pipe wall into the cavity and forms a single counter-rotating vortex. As the pipe Re increases (down the rows), the flow topology remains unchanged but the velocity and vorticity in the cavity increase. The same is true for increasing pipe De (curvature increases by columns from left to right), as the Dean flow along the centre of the curved pipe shifts the peak freestream velocity towards the upper wall, increasing the magnitude of the velocity near the wall as it reaches the cavity, mimicking the effect of increasing the overall flow rate in the pipe. There is, however, an important difference: the out-of-plane velocity evolves in a complex

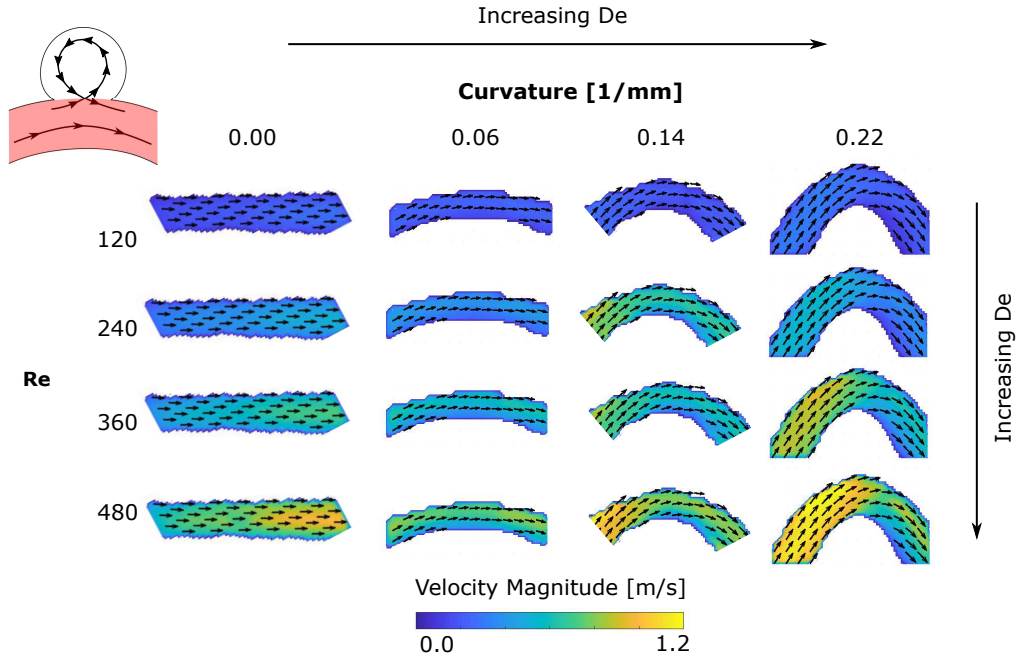


Figure 4: Freestream velocity (in the parent vessel, highlighted in red on the aneurysm schematic), for different pipe curvature and inflow rates. The colours represent the velocity magnitude and the arrows represent the direction of the in-plane velocity, from left to right, correspond to increasing pipe curvature, κ , (Dean number increases diagonally from top left to bottom right), and rows, from top to bottom, correspond to increasing Reynolds number (inflow rate, Q_{pipe}).

manner with increasing pipe curvature. The flow rotation is three-dimensional and not contained in the cavity's plane of symmetry. As the curvature increases, the flow becomes more three-dimensional, with the flow entering the cavity transitioning from having a negative out-of-plane velocity component (shown in blue in Figure 3) to a positive out-of-plane velocity component at the highest curvature (shown in red). Additionally, an increase in curvature results in an increase in the percentage of flow that is entering the aneurysm. This can be observed in the zero or positive vertical velocity component of the vectors at the cavity-freestream interface in the two highest curvatures, compared to the negative vertical velocity component at the cavity entrance for the two lowest curvatures.

This single counter-rotating vortex has been described for steady laminar flow in a spherical or square cavity (Higdon 1985; Stephanoff *et al.* 1980; Sobey 1980; Tippe & Tsuda 2000), as well as in aneurysm geometries (Hoi *et al.* 2004) (Imai *et al.* 2008). The flow topology was found to depend on the opening angle of the cavity and the ratio between the depth and the width of the cavity. For small Re ($Re \leq 5$) Stephanoff *et al.* (1980) observed no separation between the flow in the pipe and the flow in the cavity. Similarly, for small opening angle of the cavity ($\alpha = 65^\circ$) and at very low Re , Higdon (1985) described no separation of the flow from the walls at the leading edge of the cavity. However, separation was described for all higher opening angles, which agrees very well with the experimental observations in this study.

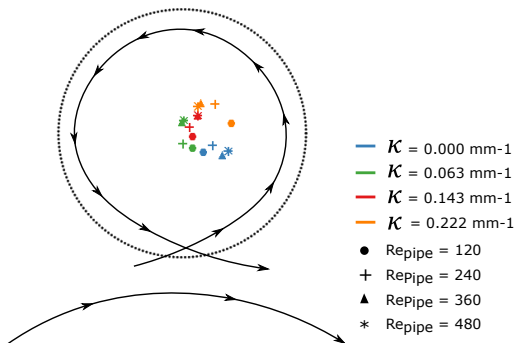


Figure 5: Location of the centre of the vortex for the different Re and De (curvature of the pipe) numbers.

Figure 4 shows the velocity field in the curved pipe for the different freestreams Re (flowrates) and De (curvature values, κ). For the case with zero curvature ($\kappa = 0.0\text{mm}^{-1}$), the maximum velocity is at the the pipe axis, following a Poiseuille flow velocity profile. By increasing the curvature of the pipe, the maximum velocity is shifted towards the outer wall of the pipe, towards the cavity opening. This asymmetry in the freestream flow leads to increased flowrate entering the cavity and an increased velocity inside, as can be observed in Figure 3. This phenomenon is dominated by the Dean number, De , and as it increases (diagonally from top left to bottom right in Figure 4), the velocity shift towards the outer edge of the curved pipe is magnified, the velocity gradient at the wall near the cavity increases and, as a result of these changes, the slope of the velocity profile at the leading edge of the cavity become steeper.

The location of the centre of the vortex was computed from the velocity field, shown in Figure 5 for the four values of curvature κ (colours) and the four freestream Re (symbols). As the Dean number increases, the location of the vortex centre moves further into the cavity (further from the opening of the cavity). The behaviour with increasing Reynolds number is not as clearly defined, corresponding with the strong effect that the Dean number has on this flow (note that as the Reynolds number increases, the Dean number also increases even for a constant curvature value). For the lowest and highest curvature values (blue and orange in Figure 5), the motion of the centre of the vortex is counter-clockwise, that is, it follows the sense of rotation of the cavity vortex. For the intermediate curvature values, the centre of the vortex moves clockwise inside the cavity in the direction contrary to the sense of rotation of flow inside the cavity. This difference in the direction of motion of the centre of the vortex is associated with the strong increase in the three-dimensionality of the cavity flow with Reynolds number, visible by the out-of-plane velocity measurements described above.

The relocation of the centre of the vortex for an increased Re in the pipe has been described for the flow in a furrow (Sobey 1980). By increasing the Re_{pipe} , the centre of the single vortex formed inside the furrow moved downstream and deeper in the cavity. In our study, the effect of the curvature of the parent vessel on the velocity profile changes the momentum and the vorticity injected at the trailing edge of the cavity, and these changes tend to relocate the centre of the vortex deeper in the cavity, with a stronger effect than the increase in the Re of the freestream outside the cavity.

3.1.2. Velocity Characterization

The flow velocity injected into the cavity is computed along a line at the cavity opening. Figure 6 shows the velocity at the opening for the different experimental conditions. The flow enters the cavity at the trailing edge (downstream) over a narrow region but with high net inflow velocity. It then recirculates counter-clockwise, slows down, and exits the cavity at the leading edge (upstream) over a wider area and with a lower velocity. The velocity profile at the opening of the cavity, thus, presents a strong asymmetry from the trailing edge inflow to the leading edge outflow. The profiles show a strong effect of the Dean Number, causing a large increase of the velocity entering the cavity. For low De , the flow entering the cavity is localized at the trailing edge. As De increases, the flow entering the cavity occupies a larger area, growing towards the centre of the cavity opening. The direction of the velocity vectors entering the cavity is also influenced by the curvature of the pipe. For higher Dean number, the flow entering the cavity is directing toward the downstream part of the wall. The change of direction of the inflow jet may impact the growth of the aneurysm (increased WSS in these area and over a larger area)). These observations are consistent with the numerical analysis by Hoi *et al.* (2004), showing that increasing the curvature lead to a larger impact zone (i.e. an increased flow impingement). This important impinging jet entering the cavity, which becomes more important with the curvature of the parent vessel, have been found to be impact the outcomes of treatment with flow diverters (Chen *et al.* 2019) (Su *et al.* 2020). Hence, aneurysms attached to a vessel with high curvature may be more likely to fail when being treated with diverters.

Figure 7 - (a) shows the average inflow velocity into the cavity \bar{u} (Equation 2.1) is proportional to the flowrate in the curved pipe Q_{pipe} , but this proportionality varies with the curvature of the pipe. In the straight model, the radial velocity component is zero upstream of the cavity. However, even at very low Re_{pipe} the flow separates and enters the cavity. Because the radial component of the velocity upstream is zero for the straight pipe (no curvature), the velocity at the opening \bar{u} is only slightly influenced by an increase in the freestream Re (Figure 7 - (a)). When the pipe is curved, the flow in the cavity is driven by the upstream asymmetrical flow in the pipe, that is shifted towards the cavity, and as the curvature increases, the freestream flow becomes more asymmetrical. Consequently, the flow into the cavity becomes more sensitive to the inertia of the freestream flow (i.e. Re).

The velocity at the opening of the cavity $Re_{opening}$ was found to be proportional to the Dean number (Figure 7 - (b)). By increasing De , the shift in axial velocity towards the outer wall in a curved pipe is accompanied by secondary vortices transporting the fluid along the centre plane from the inner to the outer wall. The magnitude of the outward radial velocity component at the mid-plane of the pipe increases with increasing curvature. As a result, the magnitude of flow entering the aneurysm also increases.

4. Unsteady Flow

4.1. Flow Structure over a cycle

Figure 8 shows the circulation in the spherical cavity over time (a whole cycle), for the four different Reynolds numbers at a single value of pipe curvature ($\kappa = 0.063 \text{ mm}^{-1}$) and Womersley Number ($Wo = 2.5$). The pulsatile flow in the freestream is forced in such a way that the acceleration phase is shorter than the deceleration (40%/60%). This

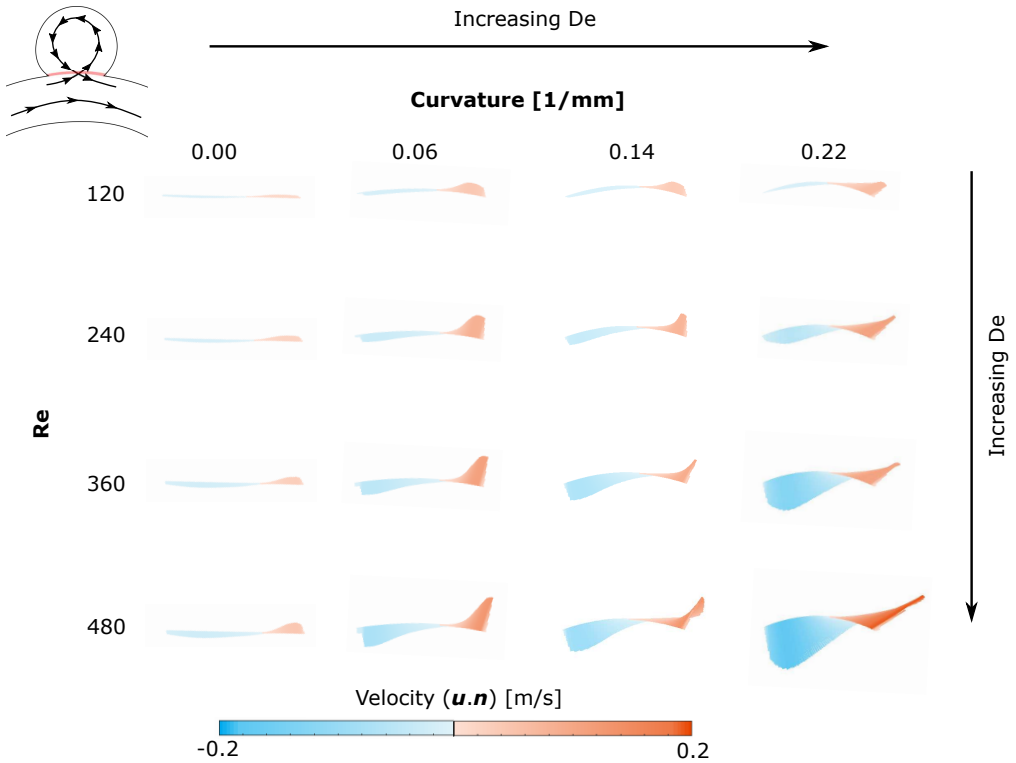


Figure 6: Velocity at the opening of the cavity (highlighted in red in the aneurysm schematic) - The lines are coloured as a function of $\mathbf{u} \cdot \mathbf{n}$, blue meaning that the flow is exiting the cavity ($\mathbf{u} \cdot \mathbf{n} < 0$) and red meaning that the flow is entering through the opening ($\mathbf{u} \cdot \mathbf{n} > 0$)

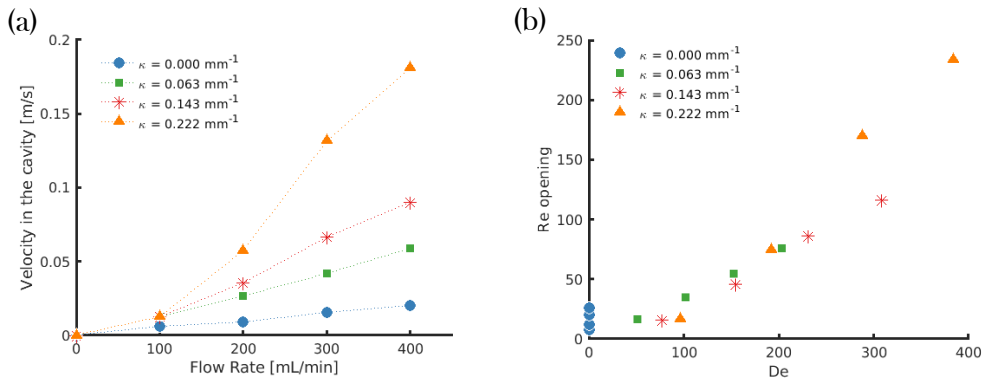


Figure 7: (a) - Velocity of the flow entering the cavity as a function of the flow rate in the pipe for the four different curvatures; (b) - Re at the opening of the cavity as a function of De

results in a steeper slope for the velocity increase than for the velocity decrease. The peak circulation and variation of circulation over the course of the flow cycle increases with increasing freestream Re .

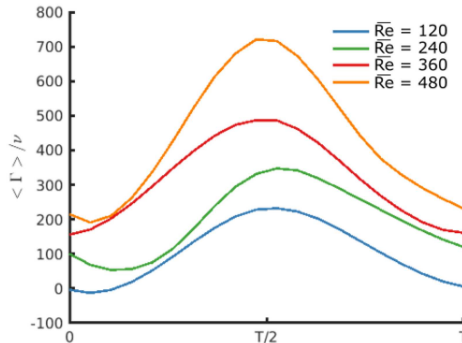


Figure 8: Circulation in the cavity ($Wo = 2.5$) over the cycle for four different Re in the curved pipe ($\kappa = 0.063 \text{ mm}^{-1}$).

As observed for steady inflow, the flow in the cavity always separates at the leading edge (Figure 9), for all experimental conditions and cavity-pipe geometries. Flow enters the cavity near the trailing edge and rotates counter-clockwise inside the spherical cavity (in the direction opposite to the freestream flow) before exiting the cavity near the leading edge, re-attaching to the freestream flow in the curved pipe. The aspect ratio of the cavity will have an effect on the number of vortices formed inside the cavity, and this will be studied in a follow-up experiment, but for the current spherical shape and range of Reynolds numbers, there is a single three-dimensional vortex that fills the cavity, and that is maintained during the entire period. The observations differ from previous numerical studies ran for straight parent vessel (Asgharzadeh & Borazjani 2016) (Asgharzadeh & Borazjani 2019), for which a single counter-rotating vortex was only observed during the acceleration of the flow in the vessel. However, the geometry of the aneurysmal sac and more specifically the opening (i.e. the neck of the aneurysm) was larger than in the present study.

During the acceleration phase (from A to B in Figure 9), the velocity inside the cavity increases. The acceleration of the flow in the pipe and the asymmetry of the velocity profile in the pipe due to its curvature lead to the motion of the centre of the vortex, which rotates in the same direction as the flow recirculation. The centre is pushed deeper into the cavity by the flow in the pipe (further from the opening of the cavity), as shown in Figure 9. This relocation of the centre of the vortex is similar to that observed for the steady case as the freestream Re increased.

During the deceleration phase (from B to C in Figure 9), as the velocity in the cavity decreases, the centre of the vortex rotates back towards the cavity entrance, still following the sense of rotation of the recirculation, which is maintained throughout the deceleration phase. At the very end of the deceleration phase, the centre of the vortex is very close to the cavity opening and the velocity is very low, but the flow in the cavity remains separated from the flow in the pipe (D in Figure 9). This is consistent with the observations made for the steady case, for which the flow in the cavity is always separated from the flow in the curved pipe, even at low freestream Re and low Dean number (i.e. low curvature of the pipe).

The motion of the centre of the vortex during the flow cycle is consistent with the

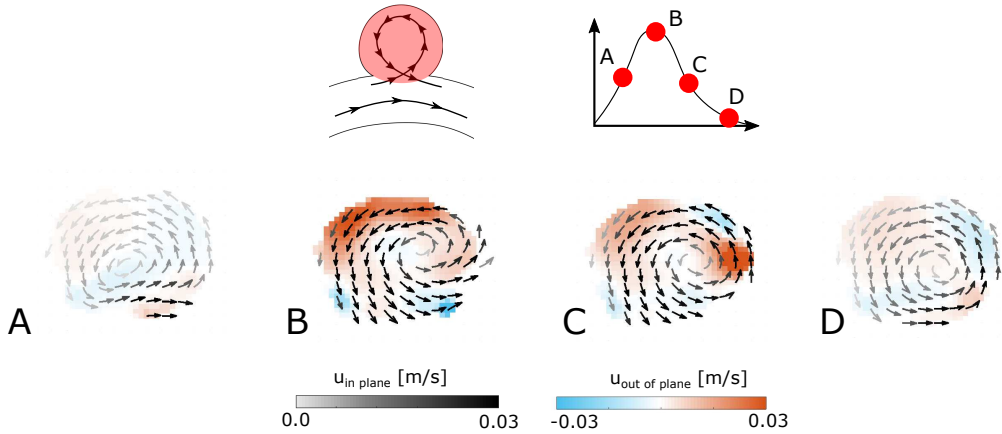


Figure 9: Velocity field in the cavity at 4 points of the cycle for $Re = 240$, $Wo = 2.5$ and $\kappa = 0.063 \text{ mm}^{-1}$

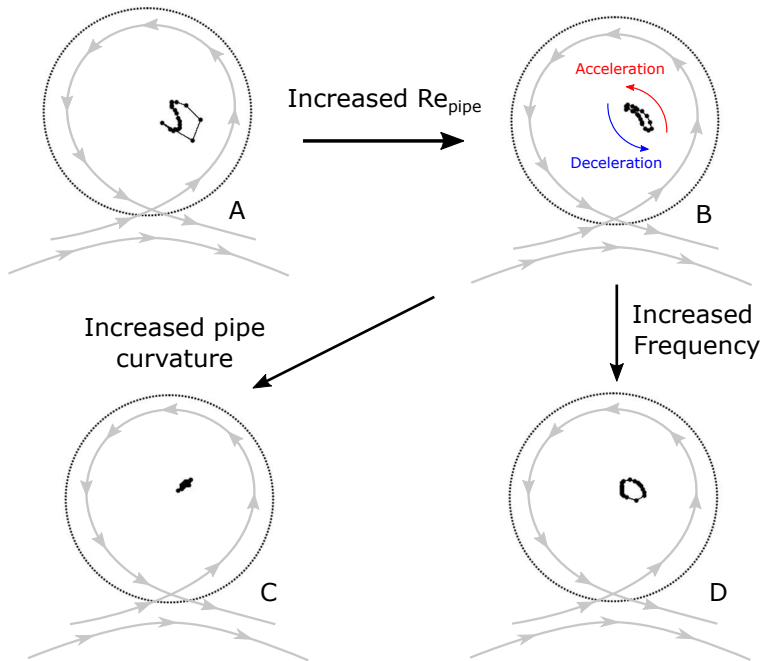


Figure 10: Location of the centre of the vortex in the spherical cavity for a pulsatile flow in the pipe: A - $Re = 240$, $Wo = 2.5$, $\kappa = 0.063 \text{ mm}^{-1}$; B - $Re = 480$, $Wo = 2.5$, $\kappa = 0.063 \text{ mm}^{-1}$; C - $Re = 480$, $Wo = 2.5$, $\kappa = 0.22 \text{ mm}^{-1}$; D - $Re = 240$, $Wo = 3.2$, $\kappa = 0.063 \text{ mm}^{-1}$

description of pulsatile flow in a furrowed channel in Sobey (1980). However, in that study, the flow in the furrow separated during the acceleration phase and then reattached at the end of the deceleration phase. This is likely due to the significantly lower freestream Re examined in that study and the lack of curvature. Further investigation into the effect of a lower cavity Reynolds number is explored in Part 2 of this work.

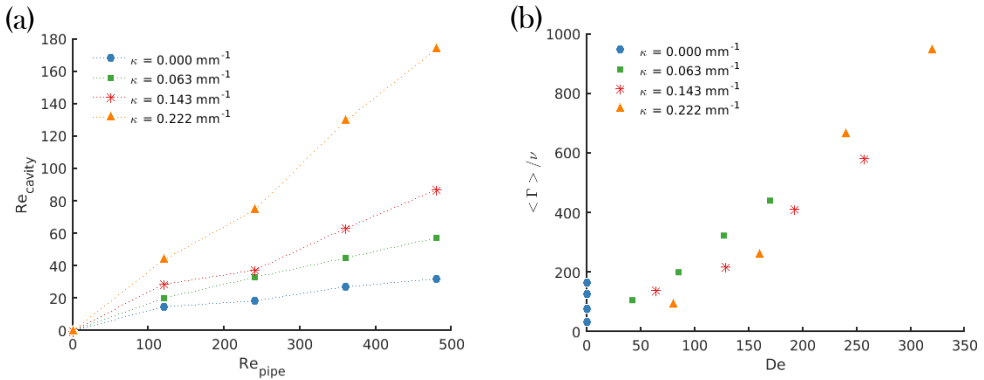


Figure 11: (a) - Re in the cavity as a function of Re in the curved pipe; (b) - Circulation in the cavity as a function of De

For steady flow, the location of the centre of the vortex is influenced by Reynolds and Dean numbers (the flowrate and curvature in the pipe). In the unsteady inflow case, the centre of the vortex moves across the cavity during the cycle, exhibiting a certain amount of hysteresis, as shown in Figure 10. As discussed for one of the cases in Figure 9, the trajectory of the centre differs between the acceleration and deceleration phases. This hysteresis is influenced by the experimental conditions and the geometry of the models. At low Dean number (low curvature of the pipe or at low freestream Re), an unstationary vortex is formed, with its centre moving over a wide range during the period (Figure 10 - A). At increasing freestream Re (increasing inertia), the vortex centre follows a more confined trajectory (Figure 10 - B). But despite increasing inertia, the location of the centre of the vortex persistently moves during the cycle. Shortening the length of the cycle (i.e. increasing the Womersley number by increasing the frequency of the pulsatile forcing) tends to shorten the trajectory of the centre of the vortex but not stop this hysteretical motion (Figure 10 - D). Finally, increasing the Dean number (increasing the curvature of the pipe while keeping the Reynolds number constant) leads to a more stationary vortex, with the least range of motion of its centre, as observed in (Figure 10 - C). As a consequence of the increased centrifugal inertia in the freestream, the asymmetry of the flow in the pipe at the leading edge impacts the flow entering the cavity, its velocity and amount of circulation. In this high Dean number case, the inertia of the vortex is so high that the circulation remains high throughout the cycle, even during the deceleration phase, minimizing the motion of the vortex centre.

The relocation of the centre of the during the acceleration phase was numerically observed by Asgharzadeh & Borazjani (2016). In their simulations, on a straight parent vessel, the vortex is not maintained throughout the cycle. However, during the acceleration, the centre of the vortex is relocated towards the downstream aneurysm wall and deeper in the cavity.

4.2. Inertial Effects (Dean and Reynolds Numbers)

Figure 11 - (a) shows the non-dimensional spatial average of the velocity inside the cavity, temporally-averaged over the flow cycle (Reynolds number in the cavity Re_{cavity}), as a function of Re_{pipe} . Similar to the steady inflow results, the velocity in the cavity is found to be proportional to the Re_{pipe} for a given value of pipe curvature. The magnitude of velocity in the cavity also becomes more sensitive to increases of freestream inertia with increasing pipe curvature (i.e. slope of lines increases with curvature). Indeed, with

increasing curvature, the flow in the pipe becomes more asymmetric with more inertia contained in the upper-half of the pipe, resulting in a larger part of the pipe flow entering and recirculating in the cavity. Both the extent of flow into the cavity and its velocity magnitude increases with the pipe curvature, as described previously for steady flow.

The flow topology in the freestream, including the asymmetry of the velocity profile at the leading edge of the cavity, which strongly impacts the recirculation in the spherical cavity, are dominated by the combination of flow inertia in the freestream and centrifugal inertia near the outer wall of the curved pipe which determines the flow at the cavity opening. This combination points to the Dean number, De , as the controlling non-dimensional parameter for this phenomenon. Figure 11 - (b) shows that the time-averaged circulation in the cavity collapses for all cases when plotted against the Dean number, De , and, in fact, is directly proportional to it. However, even if the trend is similar between steady and pulsatile inflows, the average circulation is generally higher for cases with steady inflow, as shown in figure 12 where circulation in the cavity, Γ is shown for steady flow ($Wo = 0$), and time-averaged over the flow-cycle for both pulsatile conditions ($Wo = 2.6$ & 3.6). At a given value of De , higher values of circulation are seen in the steady inflow condition when compared to the two pulsatile conditions. This means that the circulation injected into the cavity during the acceleration phase does not compensate for the decrease in circulation introduced during deceleration. This could partly be caused by the instability of the vortex associated with pulsatile inflow, compared to the very stationary vortex induced by the steady inflow. The fact that the circulation is higher for steady versus pulsatile, even for the highest Dean number case (Figure 12), where the vortex motion is significantly reduced, shows that the amount of circulation brought by the flow in the pipe over a cycle is lower for unsteady conditions than the quasi-steady injection of vorticity in the cavity associated with steady inflow.

The values of the circulation for $Wo = 2.6$ and $Wo = 3.6$ are very similar. This supports the finding of a very limited impact of the frequency of the pulsatile inflow on the flow in the cavity, within the range of frequencies studied in these experiments. The main impact of the variation of the inflow frequency on the flow topology is on the motion of the centre of the vortex. The length of the path of the vortex centre trajectory along the period is reduced by 25% when the Wo was increased from 2.6 to 3.6 (doubling the frequency of the inflow from 50 to 100 cycles per minute).

The Re in the pipe also impacts the trajectory of the centre of the vortex during the cycle, as previously described for Figure 10. Figure 13 shows the ratio between the area covered by the centre of the vortex during the cycle and the area of the cavity. At low Reynolds number and for the lowest curvature of the pipe, the location of the centre of the vortex is strongly influenced by the acceleration and deceleration of the flow in the pipe, resulting in a large area covered by the centre during the cycle. For low Re_{pipe} but high Dean number, the inertia brought by the curvature of the flow in the pipe results in a more stationary vortex and a smaller area covered by the centre during the cardiac cycle.

By increasing the Re in the freestream, the influence of the Wo (acceleration and deceleration) of the inflow on the flow topology is reduced and the area covered by the centre of the vortex is reduced, for all Dean numbers. The increased inertia brought by the freestream flow increases the stability of the vortex in the cavity minimizing its motion throughout the flow cycle.

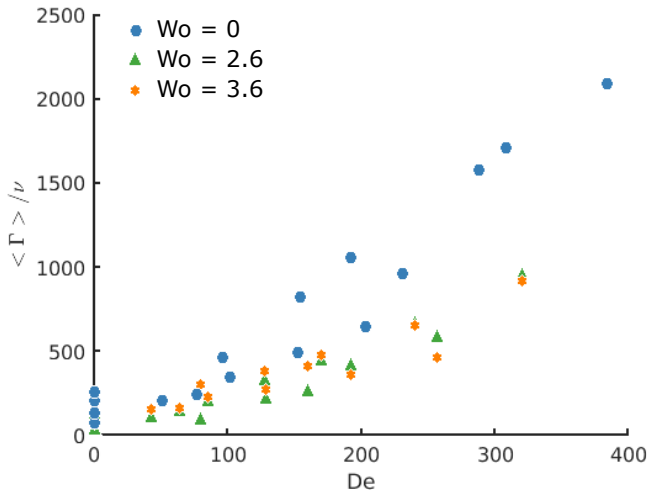


Figure 12: Circulation Γ averaged over the cycle for the 3 Womersley number $Wo = 0, 2.6$ and 3.6 as a function of De

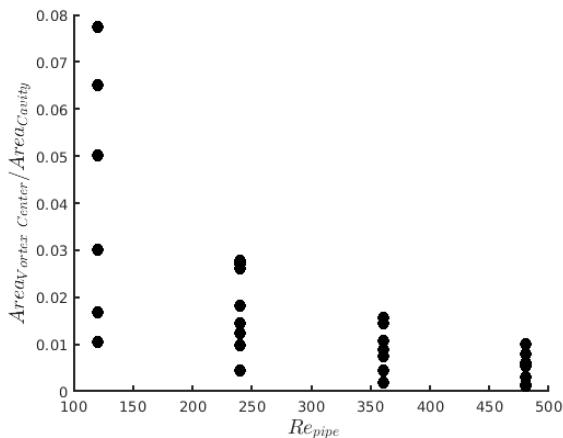


Figure 13: Area covered by the motion of the centre of the vortex across the cycle as a function of Re_{pipe}

5. Conclusion

Flow in a spherical cavity attached to a curved circular pipe, used as an idealized aneurysm, has been investigated for intermediate Reynolds numbers ($Re = 100 - 500$). The analysis focuses on the effect of the curvature of the centreline of the pipe on the flow patterns in the cavity, and includes both steady and pulsatile inflow conditions.

For every value of pipe curvature and Re_{pipe} , a single counter-rotating vortex is observed in the cavity. This flow pattern agrees well with previous observations made for spherical or square cavities (Higdon 1985; Stephanoff *et al.* 1980; Sobey 1980; Tippe & Tsuda 2000) and idealized aneurysm geometries (Imai *et al.* 2008) (Epshtein & Korin 2018).

As described in canonical Dean flows, the curvature of the pipe centreline leads to an asymmetrical velocity profile, with peak axial velocity shifting outwards towards the outer wall and the spherical cavity opening. As a consequence, higher values of pipe curvature result in more momentum entering the cavity and influencing the strength and location of the vortex centre. With increasing values of pipe curvature, the centre of the vortex moves deeper into the cavity. The centre also relocates as the Reynolds number of the freestream increases, as it was described for the flow in a furrow (Sobey 1980). For pulsatile inflows, the location of the centre varies between the acceleration and deceleration phase of the inflow and is influenced by the freestream Re and Wo , as well as the De (curvature of the pipe centreline). During acceleration, the centre moves deeper in the cavity and then relocates towards the opening of the cavity during deceleration. Increases in Wo shorten the trajectory of the vortex centre, while increases in De stabilize the vortex, with high values of De producing minimal vortex motion.

As a consequence of the asymmetry of the velocity profile induced by the curvature of the pipe, the strength of circulation in the cavity and magnitude of velocity at the cavity neck are dominated by the Dean number for both steady and pulsatile inflows. However, even if this trend is similar for steady and pulsatile inflows, the time-averaged circulation is higher for steady inflow cases, suggesting that the circulation injected in the cavity during the acceleration phase does not compensate for the decrease in circulation induced by the deceleration of the freestream. For pulsatile inflow cases, the effect of the Womersley number Wo on the circulation in the cavity is very small.

This study, focused on the effect of pipe curvature, flow-rate (Re), and inertia (Wo), shows that the flow in a spherical cavity attached to a curved pipe is dominated by the Dean number De . Other geometrical parameters such as the shape of the cavity or the size of the opening may impact the flow patterns in the cavity, but were not studied here.

The geometry studied here, flow in a curved pipe connected to a spherical cavity, is an idealized representation of a common biofluid mechanics problem: sidewall cerebral aneurysms. Understanding the fluid mechanics of cerebral aneurysms is crucial to advancing our knowledge of the disease's progression and our ability to design optimal treatment options. In part 2 of this study, we expand upon our work by incorporating aneurysm treatment methods which drastically reduce the flow into the spherical cavity and create entirely new flow features.

Acknowledgments

This work has been financially supported by the NIH/NINDS (grant 1R03NS078539 and 1R01NS088072) and by the American Heart Association via a Postdoctoral fellowship (19POST34450082). This work was supported by an unrestricted grant in the form of the pipeline devices to our academic institution from Medtronic Inc., which had no role in the experimental design, data analysis or scholarship of this work.

REFERENCES

- ASGHARZADEH, HAFEZ & BORAZJANI, IMAN 2016 Effects of Reynolds and Womersley Numbers on the Hemodynamics of Intracranial Aneurysms. *Computational and Mathematical Methods in Medicine* **2016**, 1–16.
- ASGHARZADEH, HAFEZ & BORAZJANI, IMAN 2019 A non-dimensional parameter for classification of the flow in intracranial aneurysms. I. Simplified geometries. *Physics of Fluids* **31** (3), 031904.
- BARBOUR, MICHAEL C, CHASSAGNE, FANETTE, CHIVUKULA, VENKAT K., MACHICOANE, NATHANAEL, KIM, LOUIS J., LEVITT, MICHAEL R. & ALISEDA, ALBERTO 2021 The effect of Dean, Reynolds and Womersley numbers on the flow in a spherical cavity on a curved round pipe. Part 2. The haemodynamics of intracranial aneurysms treated with flow-diverting stents. *Journal of Fluid Mechanics* .
- BURGGRAF, ODUS R. 1966 Analytical and numerical studies of the structure of steady separated flows. *Journal of Fluid Mechanics* **24** (1), 113–151.
- CHEN, JUNFAN, ZHANG, YISEN, TIAN, ZHONGBIN, LI, WENQIANG, ZHANG, QIANQIAN, ZHANG, YING, LIU, JIAN & YANG, XINJIAN 2019 Relationship between haemodynamic changes and outcomes of intracranial aneurysms after implantation of the pipeline embolisation device: a single centre study. *Interventional Neuroradiology* **25** (6), 671–680.
- CHIVUKULA, VENKAT KESHAV, LEVITT, MICHAEL R., CLARK, ALICIA, BARBOUR, MICHAEL C., SANSOM, KURT, JOHNSON, LUKE, KELLY, CORY M., GEINDREAU, CHRISTIAN, ROLLAND DU ROSCOAT, SABINE, KIM, LOUIS J. & ALISEDA, ALBERTO 2019 Reconstructing patient-specific cerebral aneurysm vasculature for in vitro investigations and treatment efficacy assessments. *Journal of Clinical Neuroscience* **61**, 153–159.
- COLLINS, W. M. & DENNIS, S. C. R. 1975 The steady motion of a viscous fluid in a curved tube. *The Quarterly Journal of Mechanics and Applied Mathematics* **28** (2), 133–156.
- DEAN, W.R. 1927 Note on the motion of fluid in a curved pipe. *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science* **4** (20), 208–223.
- DEAN, W. R. 1928 The streamline motion of a fluid in a curved pipe **5**, 673–693.
- EPSHTEIN, MARK & KORIN, NETANEL 2018 Mapping the Transport Kinetics of Molecules and Particles in Idealized Intracranial Side Aneurysms. *Scientific Reports* **8** (1), 8528.
- EUSTICE, J. 1910 Flow of Water in Curved Pipes. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **84** (568), 107–118.
- EUSTICE, J. 1911 Experiments on Stream-Line Motion in Curved Pipes. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **85** (576), 119–131.
- FORD, MATTHEW D, ALPERIN, NOAM, LEE, SUNG HOON, HOLDSWORTH, DAVID W & STEINMAN, DAVID A 2005 Characterization of volumetric flow rate waveforms in the normal internal carotid and vertebral arteries. *Physiological Measurement* **26** (4), 477–488.
- FUKUDA, SHUNICHI, SHIMOGONYA, YUJI, NAKAMURA, MASANORI, YAMADA, TOMOHIRO, SUZUKI, KOSUKE, YAMAMOTO, YUUTO, KANOU, KIYOMITSU, OKADA, NORIKA, PAN, FANGJIA, OKUDAIRA, TAKUMA, KUWAHARA, SHUNTARO & ON BEHALF OF THE CFD-BIO STUDY GROUP 2019 Review on the formation and growth of cerebral aneurysms. *Journal of Biorheology* **33** (2), 43–52.
- HAMAKIOTES, COSTAS C. & BERGER, STANLEY A. 1988 Fully developed pulsatile flow in a curved pipe. *Journal of Fluid Mechanics* **195** (-1), 23.
- HIGDON, JONATHAN J. L. 1985 Stokes flow in arbitrary two-dimensional domains: shear flow over ridges and cavities. *Journal of Fluid Mechanics* **159** (-1), 195.
- HOI, YIEMENG, MENG, HUI, WOODWARD, SCOTT H., BENDOK, BERNARD R., HANEL, RICARDO A., GUTERMAN, LEE R. & HOPKINS, L. NELSON 2004 Effects of arterial geometry on aneurysm growth: three-dimensional computational fluid dynamics study. *Journal of Neurosurgery* **101** (4), 676–681.
- IMAI, YOSUKE, SATO, KODAI, ISHIKAWA, TAKUJI & YAMAGUCHI, TAKAMI 2008 Inflow into Saccular Cerebral Aneurysms at Arterial Bends. *Annals of Biomedical Engineering* **36** (9), 1489–1495.
- LE, TRUNG B., BORAZJANI, IMAN & SOTIROPOULOS, FOTIS 2010 Pulsatile Flow Effects on the Hemodynamics of Intracranial Aneurysms. *Journal of Biomechanical Engineering* **132** (11), 111009.

- McCONALOGUE, D. J. & SRIVASTAVA, R. S. 1968 Motion of a fluid in a curved tube. *Proceedings of the Royal Society of London. Series A. Mathematical and Physical Sciences* **307** (1488), 37–53.
- MENG, H., TUTINO, V.M., XIANG, J. & SIDDIQUI, A. 2014 High WSS or Low WSS? Complex Interactions of Hemodynamics with Intracranial Aneurysm Initiation, Growth, and Rupture: Toward a Unifying Hypothesis. *American Journal of Neuroradiology* **35** (7), 1254–1262.
- NAIR, PRIYA, CHONG, BRIAN W., INDAHLASTARI, APRINDA, RYAN, JUSTIN, WORKMAN, CHRISTOPHER, HAITHEM BABIKER, M., YADOLLAHI FARSANI, HOOMAN, BACCIN, CARLOS E. & FRAKES, DAVID 2016 Hemodynamic Characterization of Geometric Cerebral Aneurysm Templates Treated With Embolic Coils. *Journal of Biomechanical Engineering* **138** (2), 021011.
- NGOEPE, MALEBOGO N., FRANGI, ALEJANDRO F., BYRNE, JAMES V. & VENTIKOS, YIANNIS 2018 Thrombosis in Cerebral Aneurysms and the Computational Modeling Thereof: A Review. *Frontiers in Physiology* **9**, 306.
- PAN, FRANK & ACRIVOS, ANDREAS 1967 Steady flows in rectangular cavities. *Journal of Fluid Mechanics* **28** (4), 643–655.
- PARLEA, L., FAHRIG, R., HOLDSWORTH, D. W. & LOWNIE, S. P. 1999 An analysis of the geometry of saccular intracranial aneurysms. *AJNR. American journal of neuroradiology* **20** (6), 1079–1089.
- RAJAH, GARY, NARAYANAN, SANDRA & RANGEL-CASTILLA, LEONARDO 2017 Update on flow diverters for the endovascular management of cerebral aneurysms. *Neurosurgical Focus* **42** (6), E2.
- SARNO, R. L. & FRANKE, M. E. 1994 Suppression of flow-induced pressure oscillations in cavities. *Journal of Aircraft* **31** (1), 90–96.
- SFORZA, DANIEL M., PUTMAN, CHRISTOPHER M. & CEBRAL, JUAN RAUL 2009 Hemodynamics of Cerebral Aneurysms. *Annual Review of Fluid Mechanics* **41** (1), 91–107.
- SHEN, C. & FLORYAN, J. M. 1985 Low Reynolds number flow over cavities. *Physics of Fluids* **28** (11), 3191.
- SOBEY, IAN J. 1980 On flow through furrowed channels. Part 1. Calculated flow patterns. *Journal of Fluid Mechanics* **96** (01), 1–26.
- STEPHANOFF, K. D., SOBEY, IAN J. & BELLHOUSE, B. J. 1980 On flow through furrowed channels. Part 2. Observed flow patterns. *Journal of Fluid Mechanics* **96** (01), 27–32.
- SU, T., REYMOND, P., BRINA, O., BOULLOT, P., MACHI, P., DELATTRE, B.M.A., JIN, L., LÖVBLAD, K.O. & VARGAS, M.I. 2020 Large Neck and Strong Ostium Inflow as the Potential Causes for Delayed Occlusion of Unruptured Sidewall Intracranial Aneurysms Treated by Flow Diverter. *American Journal of Neuroradiology* **41** (3), 488–494.
- TEXAKALIDIS, PAVLOS, SWEID, AHMAD, MOUCHTOURIS, NIKOLAOS, PETERSON, ERIC C., SIOKA, CHRISSA, RANGEL-CASTILLA, LEONARDO, REAVEY-CANTWELL, JOHN & JABBOUR, PASCAL 2019 Aneurysm Formation, Growth, and Rupture: The Biology and Physics of Cerebral Aneurysms. *World Neurosurgery* **130**, 277–284.
- TIPPE, A. & TSUDA, A. 2000 Recirculating flow in an expanding alveolar model: experimental evidence of flow-induced mixing of aerosols in the pulmonary acinus. *Journal of Aerosol Science* **31** (8), 979–986.
- WAN, HAILIN, GE, LIANG, HUANG, LEI, JIANG, YEQING, LENG, XIAOCHANG, FENG, XIAOYUAN, XIANG, JIANPING & ZHANG, XIAOLONG 2019 Sidewall Aneurysm Geometry as a Predictor of Rupture Risk Due to Associated Abnormal Hemodynamics. *Frontiers in Neurology* **10**, 841.
- WEISS, ROBERT F. & FLORSHEIM, BRUCE H. 1965 Flow in a Cavity at Low Reynolds Number. *Physics of Fluids* **8** (9), 1631.
- WILLIAMS, G. S., HUBBELL, C. W. & FENKELL, G. M. 1902 Experiments At Detroit, Mich., On the Effect of Curvature upon the Flow of Water In Pipes. *Transactions of the American Society of Civil Engineers* **47**, 1–196.
- WOMERSLEY, J. R. 1955 Method for the calculation of velocity, rate of flow and viscous drag in arteries when the pressure gradient is known. *The Journal of Physiology* **127** (3), 553–563.