



**HAL**  
open science

## Extraction by spark generated shockwaves

Hadrien Lamotte, Jean-Maxime Roux, Josselin Lupette, Eric Maréchal,  
Jean-Luc Achard

► **To cite this version:**

Hadrien Lamotte, Jean-Maxime Roux, Josselin Lupette, Eric Maréchal, Jean-Luc Achard. Extraction by spark generated shockwaves. AlgaEurope, Dec 2016, Madrid, Spain. hal-01744386


**HAL Id: hal-01744386**

**<https://hal.univ-grenoble-alpes.fr/hal-01744386>**

Submitted on 27 Mar 2018

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

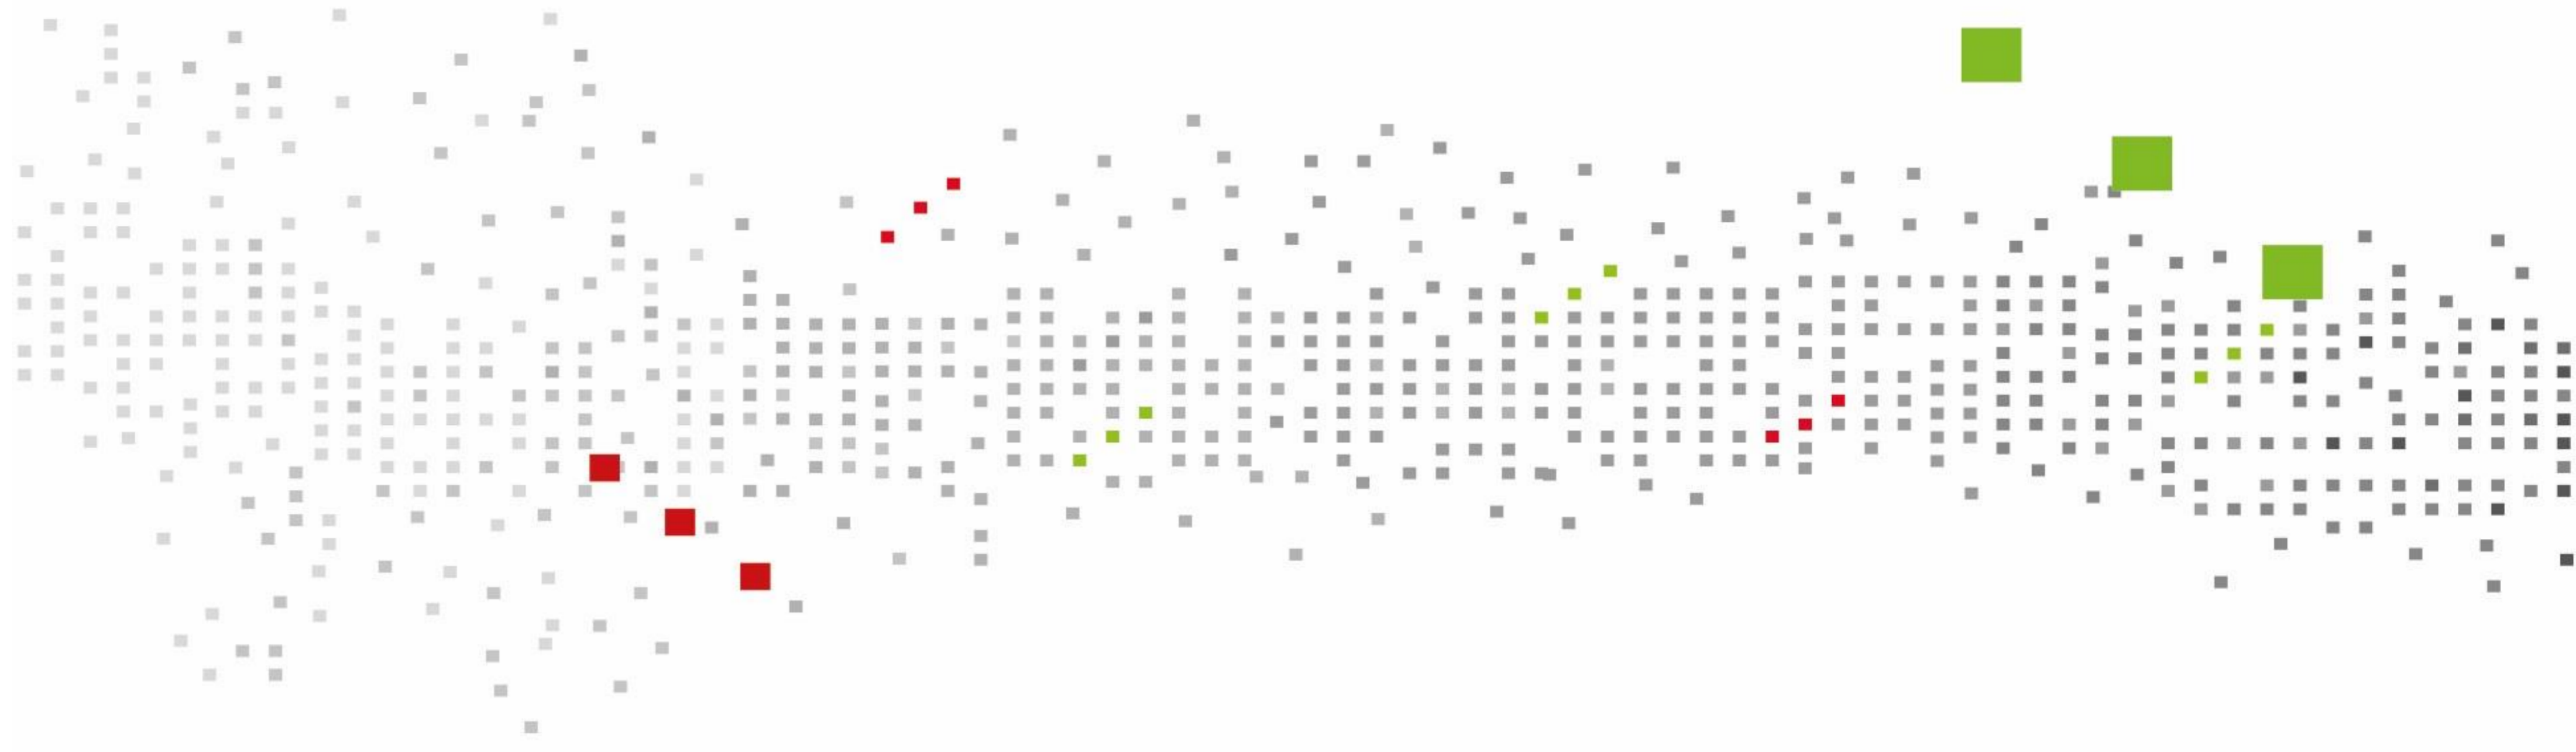

# EXTRACTION BY SPARK GENERATED SHOCKWAVES

Authors : H. Lamotte<sup>1</sup>, J-M. Roux<sup>1</sup>, J. Lupette<sup>2</sup>, E. Marechal<sup>2</sup>, J-L. Achard<sup>3</sup>

<sup>1</sup>CEA LETI MINATEC Campus, Univ. Grenoble Alpes, F-38054 Grenoble, France


<sup>2</sup>Laboratoire Physiologie Cellulaire & Végétale (CEA, CNRS, INRA, Univ. Grenoble Alpes), Grenoble, France

<sup>3</sup>Laboratoire des Écoulements Géophysiques et Industriels (GrenobleINP, Univ. Grenoble Alpes, CNRS), Grenoble, France


## Abstract

The production of lipids using oleaginous microorganisms is widely studied to develop the next generation of renewable fuels. Now, the extraction of intracellular lipids has been identified as one of the crucial elements that have the largest impact on the cost of microalgal bio-refinery process. In this context, a new electric field based technique is studied to disrupt cell membranes and to extract their content. High voltage electrical pulses are used without any transducer to create underwater spark discharges that produce a high-pressure plasma/vapor bubble whose expansion, collapse and rebounds generate shockwaves. The high induced variations of pressure produce a cloud cavitation above the electrode; bubbles collapses are known to destroy mechanically cells membranes. Moreover, the pressure rise induced by the process can be used to renew the solution containing destroyed cells at each pulse.

Underwater spark discharges can extract chlorophyll and lipids from *Phaeodactylum tricornutum* and *Nannochloropsis gaditana* and also DNA from bacteria such as *Bacillus subtilis*. The present communication presents results of a parametric study of the process. It is shown that efficiencies depends on the microorganisms' concentration and the water height above the electrodes.


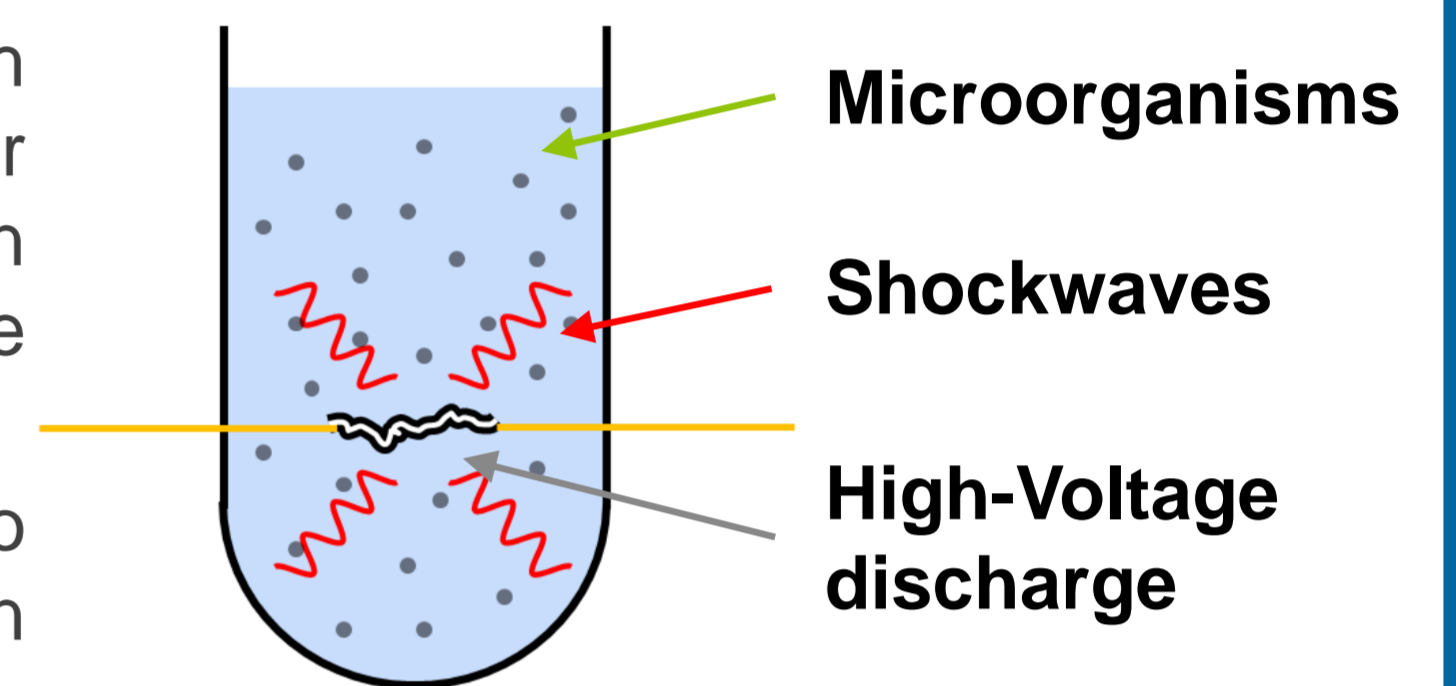


## Following an underwater discharge of a 45 nF capacitor at 10 kV

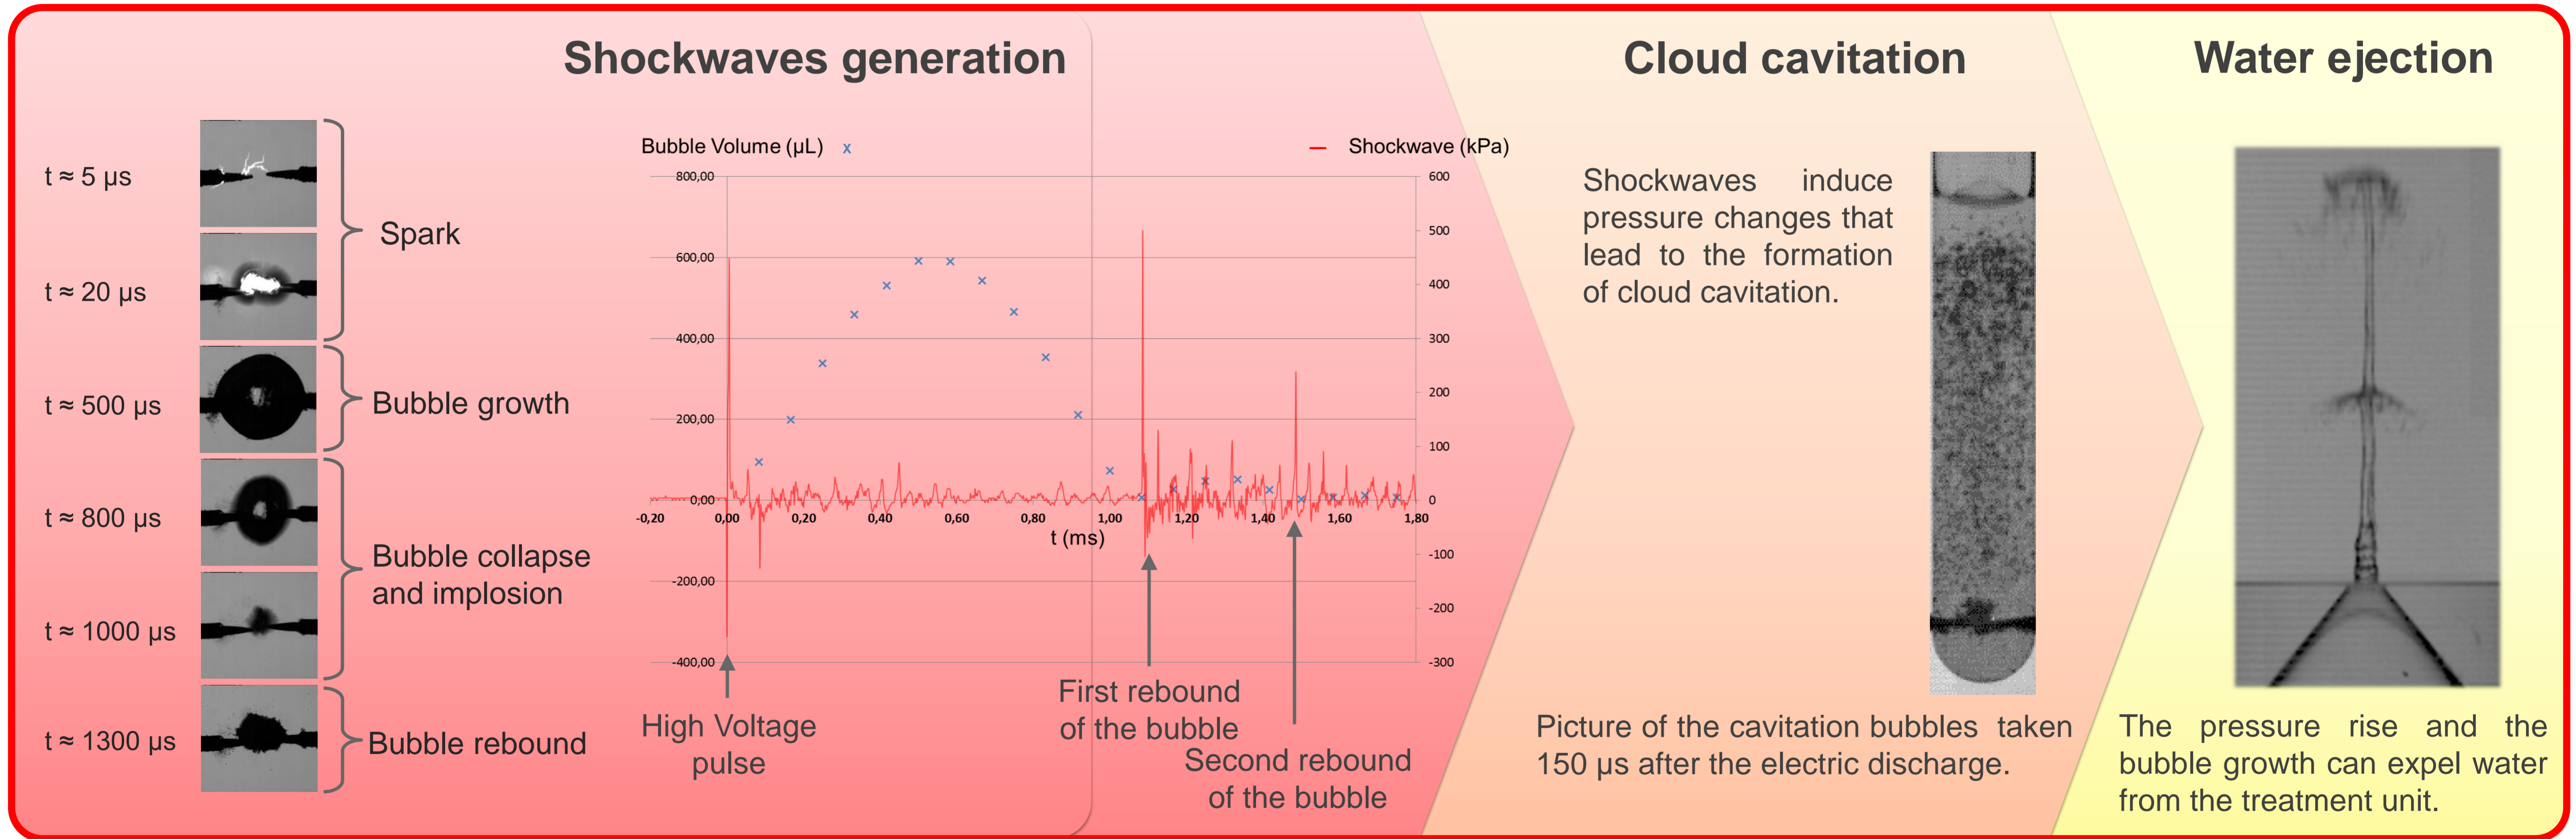



## Two applications

### Chlorophyll release

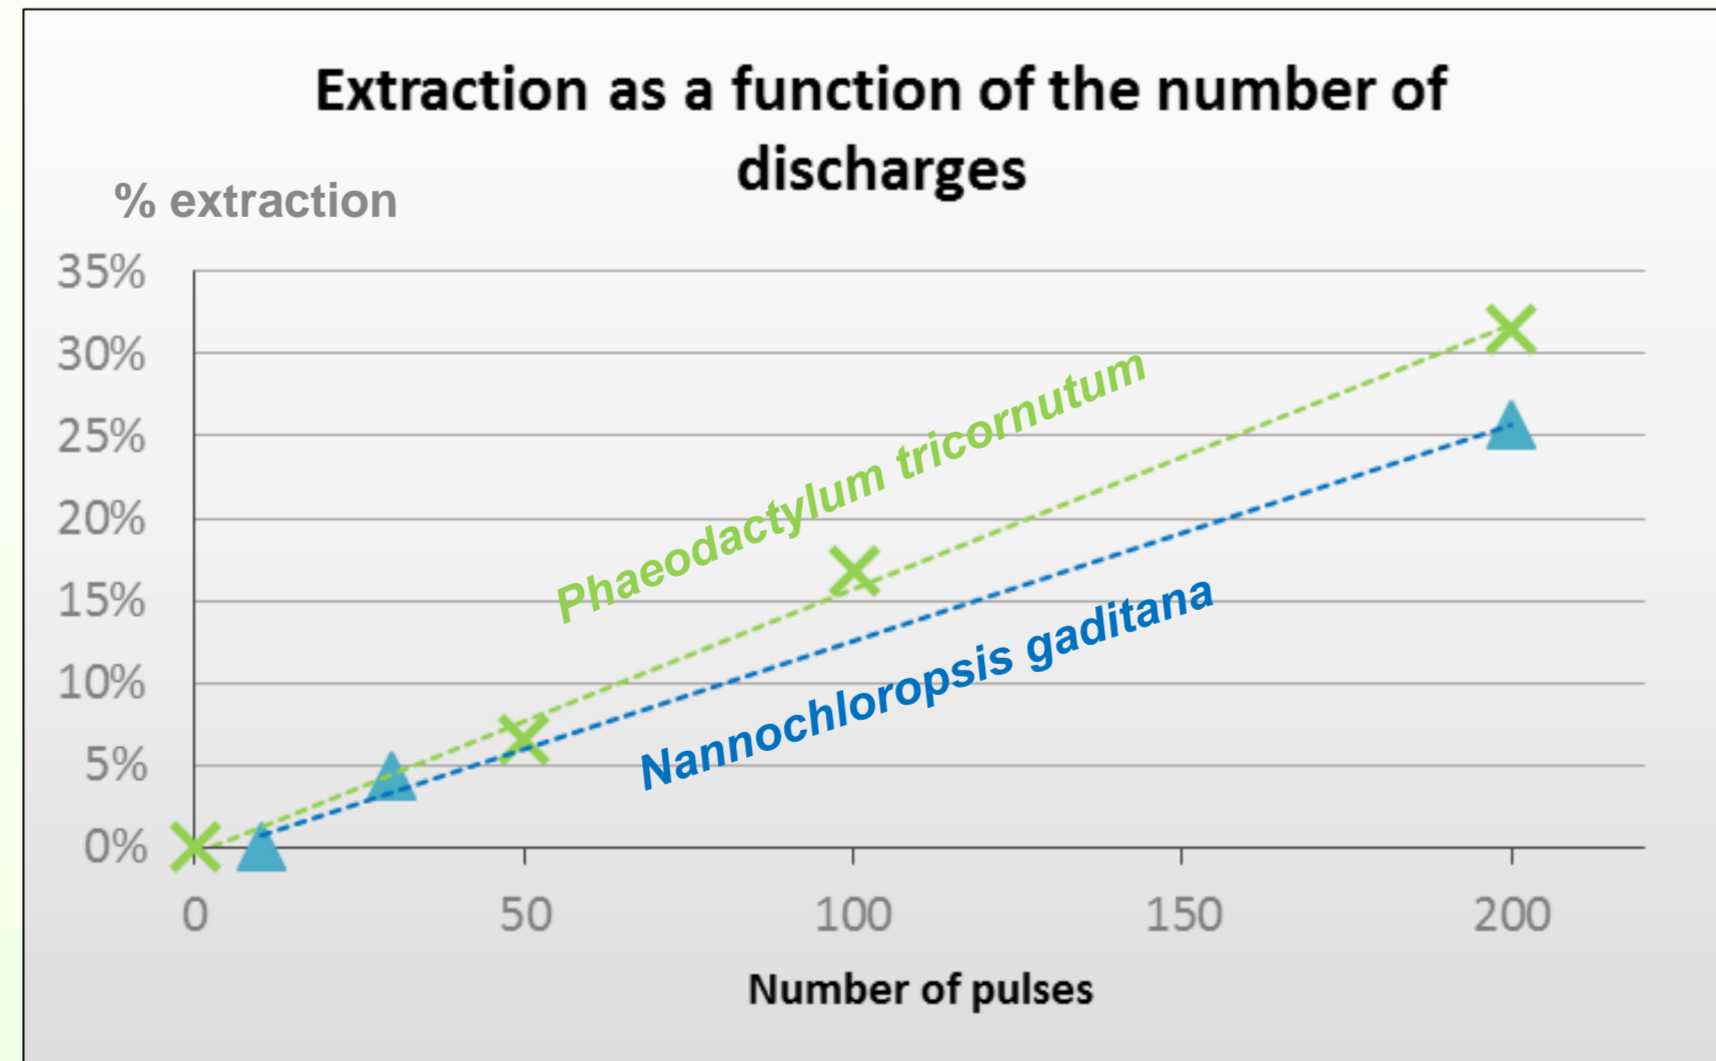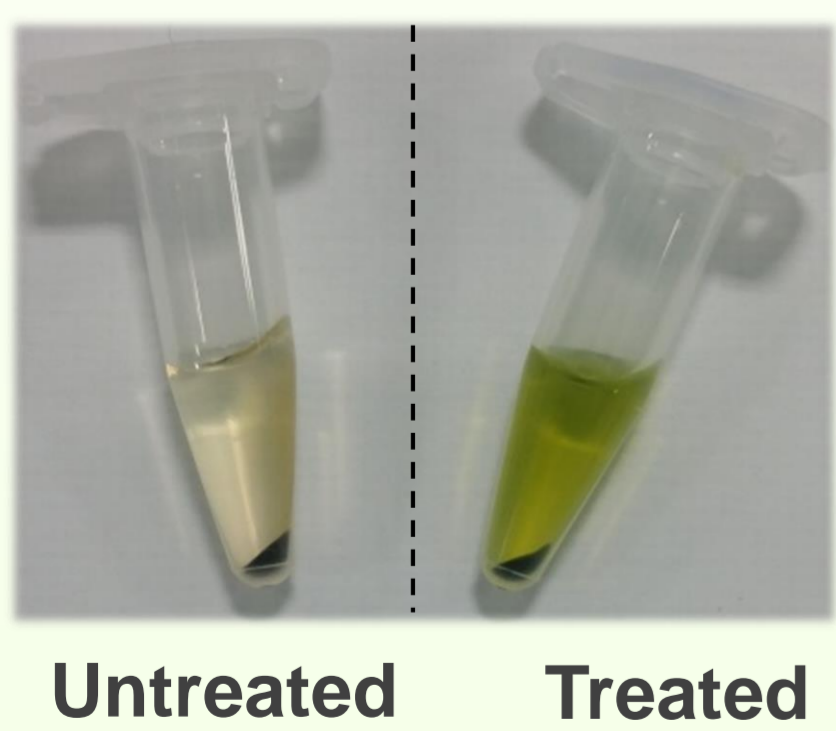


Underwater discharges produce heat and free radicals that combine to create very reactive molecules such a hydrogen peroxyde. But *Phaeodactylum tricornutum* does not release pigments when heated up to 90°C. Also 1 mM of hydrogen peroxyde does not seem to make the algae release pigment. **Release of intracellular molecules seem to be therefore due to the mechanical effect of cloud cavitation.**

- About 25-35% of chlorophyll are released by 200 electric pulses
- A water height of about 13,5mm above the electrodes seems to be optimal
- Dilution seems to improve the treatment efficiency

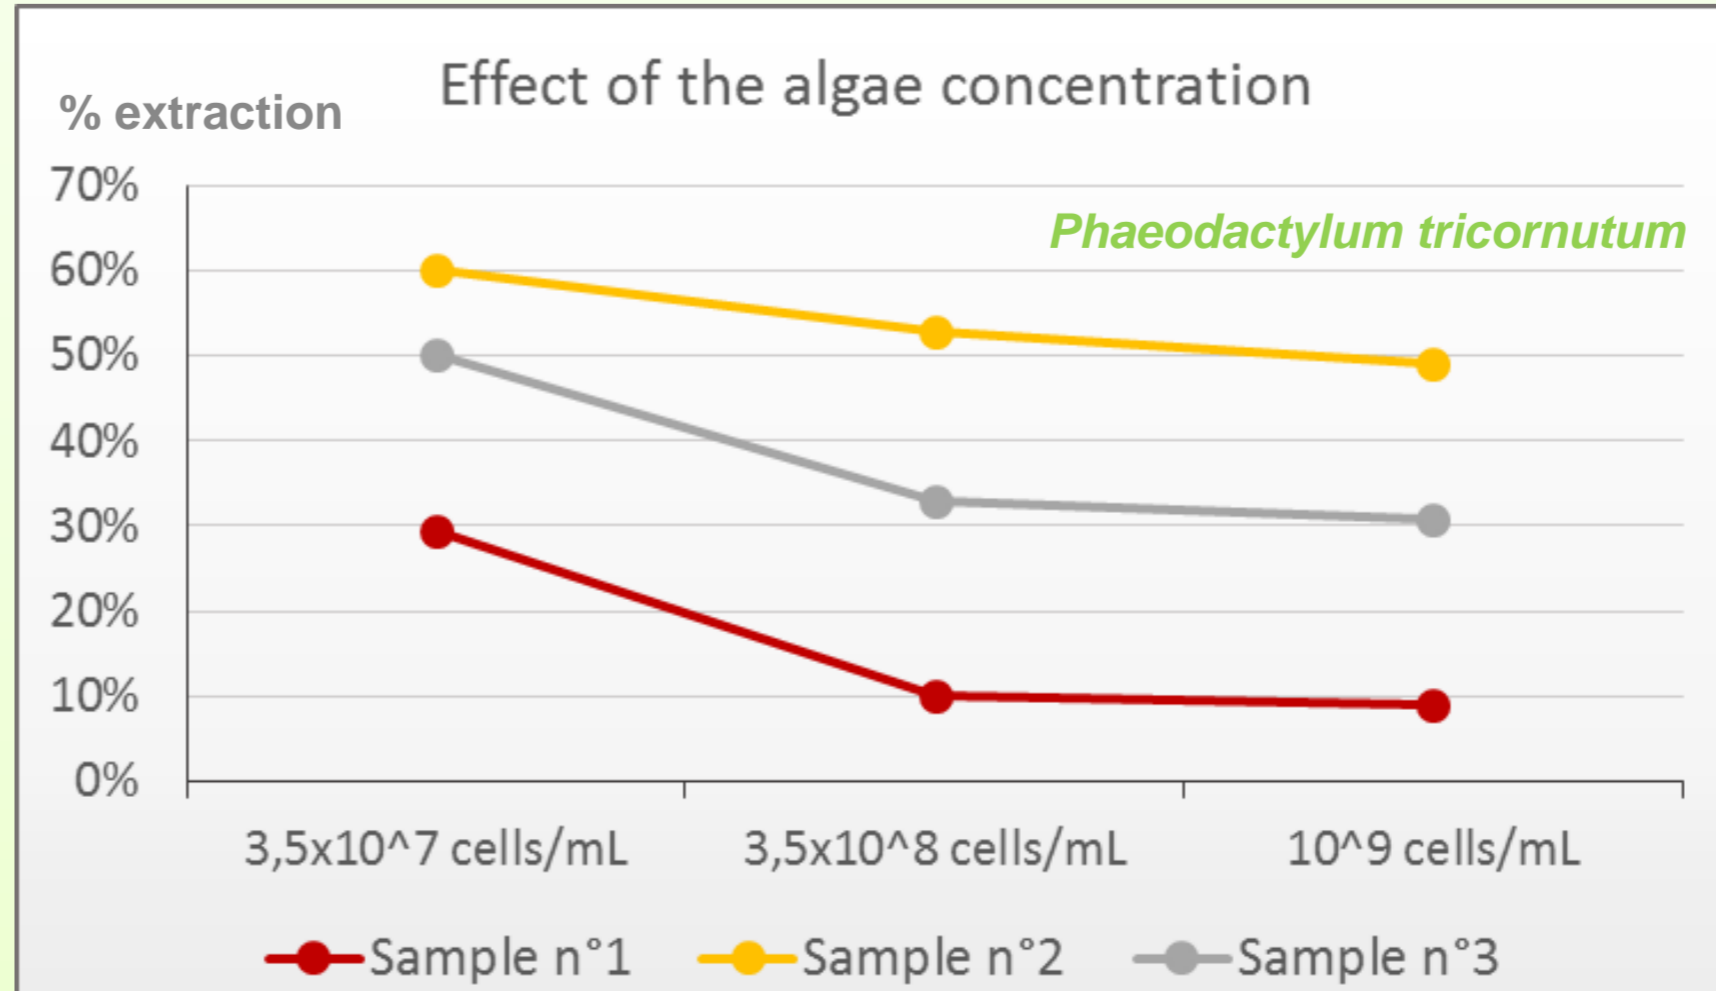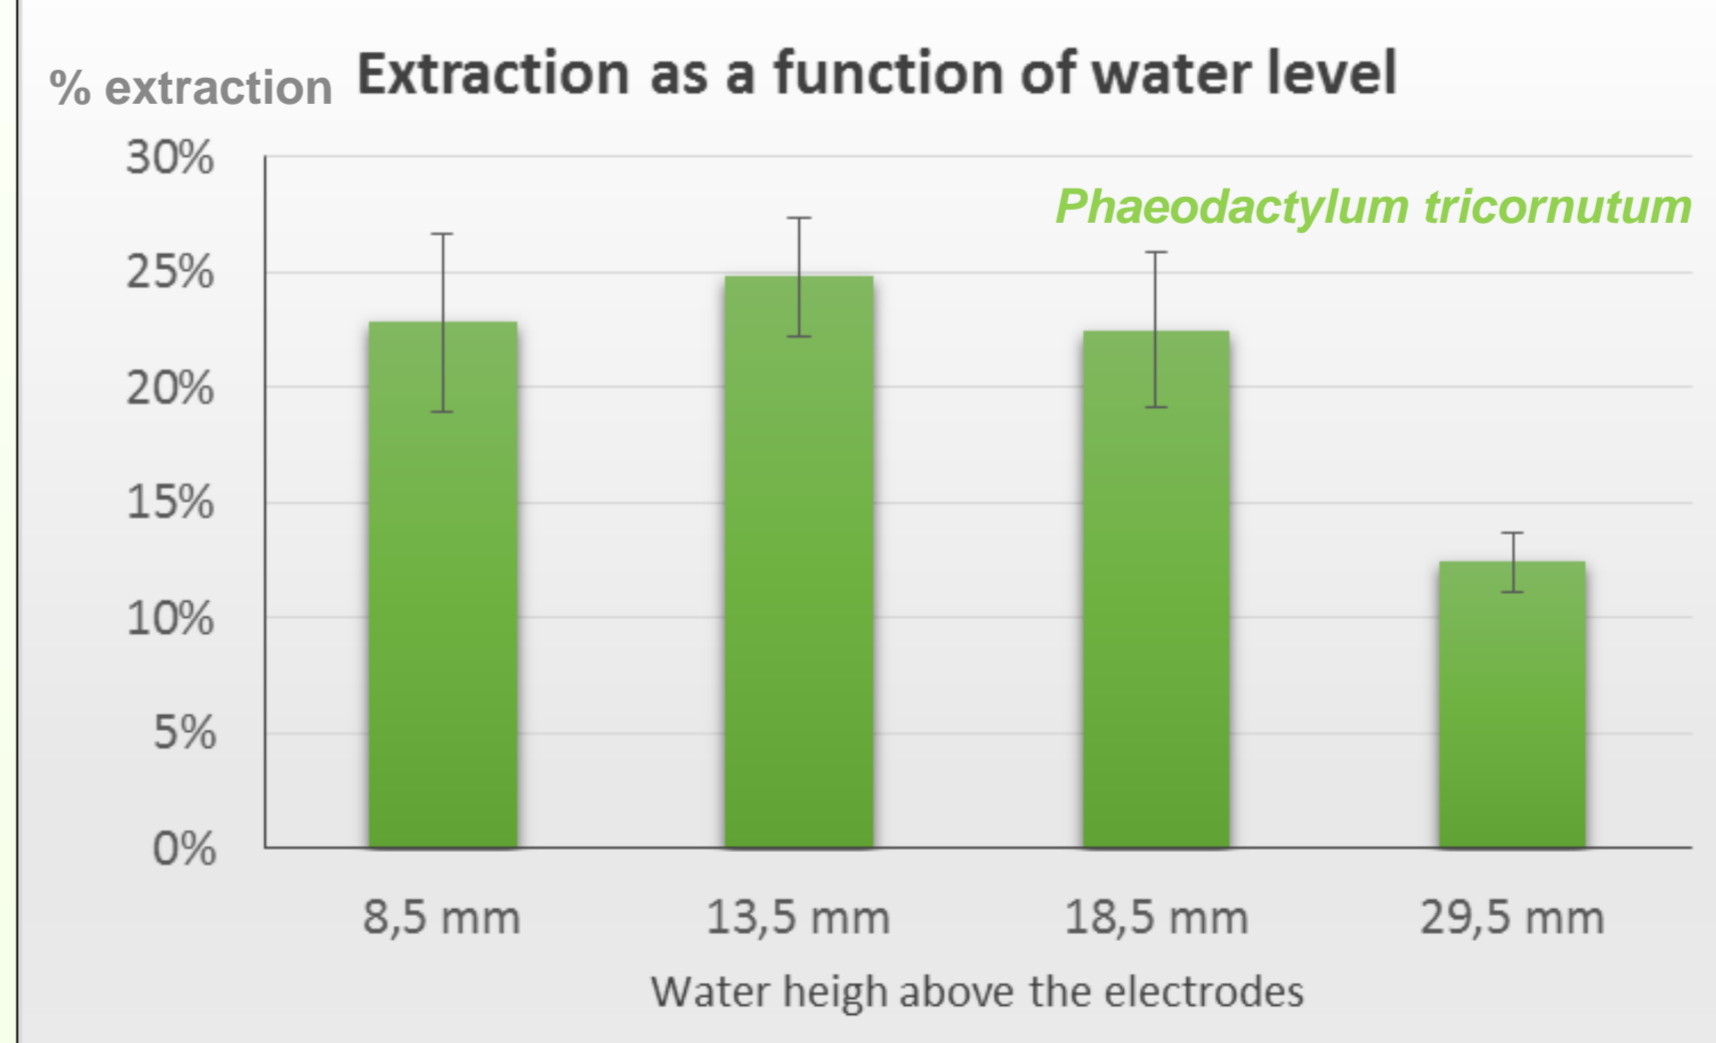

### Triglyceride release

Studied on cultures (nitrogen starvation)

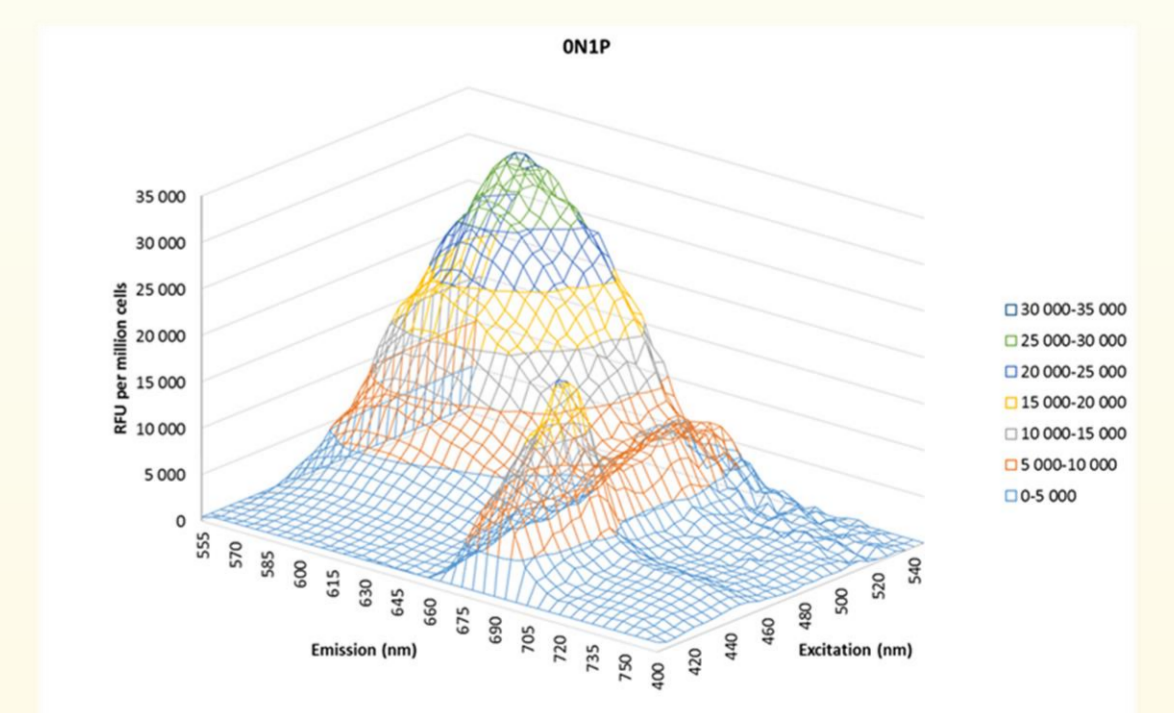

➤ Extraction of about 6%

**Perspective :** recover the same amount as chlorophyll