



**HAL**  
open science

## Batch biohydrogen production from dilute acid hydrolyzates of fruits-and-vegetables wastes and corn stover as co-substrates

Santiago Rodríguez-Valderrama, Carlos Escamilla-Alvarado, Jean-Pierre Magnin, Pasiano Rivas-García, Idania Valdez-Vazquez, Elvira Ríos-Leal

► **To cite this version:**

Santiago Rodríguez-Valderrama, Carlos Escamilla-Alvarado, Jean-Pierre Magnin, Pasiano Rivas-García, Idania Valdez-Vazquez, et al.. Batch biohydrogen production from dilute acid hydrolyzates of fruits-and-vegetables wastes and corn stover as co-substrates. *Biomass and Bioenergy*, 2020, 140, pp.105666. 10.1016/j.biombioe.2020.105666 . hal-02951141

**HAL Id: hal-02951141**

**<https://hal.univ-grenoble-alpes.fr/hal-02951141>**

Submitted on 30 Nov 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## Batch biohydrogen production from dilute acid hydrolyzates of fruits- and-vegetables wastes and corn stover as co-substrates

2

4 Santiago Rodríguez-Valderrama<sup>1,2</sup>, Carlos Escamilla-Alvarado<sup>1,\*</sup>, Jean-Pierre Magnin<sup>2</sup>,  
Pasiano Rivas-García<sup>1</sup>, Idania Valdez-Vázquez<sup>3</sup>, Elvira Ríos-Leal<sup>4</sup>

6

<sup>1</sup>Universidad Autónoma de Nuevo León, Centre for Research on Biotechnology and Nanotechnology  
8 (CIByN), Faculty of Chemical Sciences, Engineering and Sustainable Bioprocesses Group, Parque de  
Investigación e Innovación Tecnológica, km 10 Highway to International Airport Mariano Escobedo,  
10 66629, Apodaca, Nuevo León, México

<sup>2</sup>Univ. Grenoble Alpes, Univ. Savoie Mont Blanc, CNRS, Grenoble INP, LEPMI, 38000 Grenoble, France.

12 <sup>3</sup>Universidad Nacional Autónoma de México, Laboratory for Research on Advanced Processes for Water  
Treatment, Instituto de Ingeniería, Unidad Académica Juriquilla, México.

14 <sup>4</sup>CINVESTAV-I.P.N., Environmental Biotechnology and Renewable Energies R&D Group, Department of  
Biotechnology and Bioengineering, Mexico City, México

16

18

\*Author for all correspondence:

20 Carlos Escamilla Alvarado, ScDr.  
Engineering and Sustainable Bioprocesses Group  
22 Centre for Research on Biotechnology and Nanotechnology (CIByN),  
Faculty of Chemical Sciences  
24 Universidad Autónoma de Nuevo León  
Apodaca, Nuevo León, Mexico  
26 Tel.: +52 81 8329 4000  
E-mail: cea\_escamilla@yahoo.com.mx

28

---

30

## Batch biohydrogen production from dilute acid hydrolyzates of fruits- and-vegetables wastes and corn stover as co-substrates

32

### 34 **ABSTRACT**

Fruits-and-vegetables wastes (FVW) and corn stover (CS) are two of the most recurred  
36 lignocellulosic biomasses used for biofuel production. In this work, the co-processing of FVW and  
CS for biohydrogen production was proposed and evaluated through a set of experimental designs.  
38 First, a 5×2 general factorial was applied on the dilute acid pretreatment at five levels of FVW:CS  
ratios (0:1, 1:3, 1:1, 3:1 and 1:0 dry mass basis) and two levels of the type of catalyst (HCl or  
40 H<sub>2</sub>SO<sub>4</sub> at 0.5% in volumetric basis). Then, biohydrogen production using the dilute acid  
hydrolyzates was carried out in batch mode at 35 °C in a 3<sup>2</sup> factorial design, the factors being the  
42 inoculum to substrate ratio (0.8, 1.0, and 1.2 g g<sup>-1</sup>) and the initial concentration of reducing sugars  
(10, 13 and 16 g L<sup>-1</sup>). The effects of the type of acid catalyst and the FVW:CS ratio were significant  
44 in terms of sugars production and yield. The best catalyst was HCl for the 3:1 FVW:CS ratio, which  
produced monomeric sugars concentrations of 10.0, 3.7 and 2.9 g L<sup>-1</sup> for glucose, xylose and  
46 arabinose, respectively. The acid hydrolyzates proved to be suitable for biohydrogen production,  
reaching yields of 2.31 mol H<sub>2</sub> mol<sup>-1</sup> glucose and hydrogen production rates of 8.83 mL H<sub>2</sub> h<sup>-1</sup>. An  
48 economic prospection at lab scale demonstrated that production of hydrogen presented net  
revenues of 0.009 USD per kg of co-substrates (wet basis), resulting in 24 % profitability of  
50 hydrogen production over its production costs. Therefore, this co-processing is an interesting  
proposal with further applications on biorefinery models.

52 **Keywords:** dark fermentation, dilute acid, factorial experimental design, hydrolyzates, overliming.

---

54

## 56 1. Introduction

Dark fermentation biohydrogen production has become a promising technology as it may be used  
58 to process various types of organic wastes (solid or liquid). It does not require luminous energy, it  
has high hydrogen production rates in comparison to other biological methods and it may be  
60 carried out at non-sterile conditions [1]. Lignocellulosic wastes have been highly esteemed for  
their abundance and bioprocessing potential [2]. Corn stover (CS) is a worldwide important  
62 lignocellulosic waste; high amounts are produced in countries such as Mexico where corn  
production reaches 21.1 million tons yearly along with the production of up to 38 million tons of  
64 corn cobs and CS [3,4].

Due to the highly stable and organized microstructure of its lignocellulosic components,  
66 pretreatments are required to reduce its recalcitrance and the cellulose crystallinity to facilitate the  
carbohydrates depolymerization [5]. Cellulose and hemicellulose can be broken-down to its mono-  
68 and disaccharides constituents by dilute acid hydrolysis. Yet the resultant sugar concentration  
depends on the operational conditions (*i.e.* reaction time, temperature, acid concentration) and  
70 type of feedstock [1,6]. Moreover, acid hydrolyzates influence dark fermentation by many factors,  
such as the type and concentration of inoculum, sugars and inhibitors concentration, temperature,  
72 and pH [7]. An excessive loading of carbohydrates may hinder the biohydrogen due to the  
excessive production of organic acids that lower the fermentation pH and promote solventogenic  
74 lactic-acid oriented metabolism [2]. Therefore, the determination of an adequate inoculum to  
substrate ratio (ISR), which relates the amounts of inoculum fed to the bioreactor in comparison  
76 to the substrate loadings, is important to foster biohydrogen production. Moreover, ISR may help  
reduce the inhibitory characteristic of acid hydrolysis. On the other hand, at higher proportion of  
78 substrate (e.g. 1:6 ISR), hydrogen production has been inhibited due to increase of osmotic  
pressure that affects microbial growth [7], and the excessive production and accumulation of  
80 volatile fatty acids (VFA) that cause pH decrease.

CS dilute acid hydrolyzates are mainly composed of xylose since its hemicellulose content  
82 present easier hydrolysis [8]. Indeed, this represents a challenge for the microbial metabolism  
preference of hexoses over pentoses. An opportunity to increase the hexoses content would be  
84 to combine the acid hydrolysis pretreatment with that of a substrate with easier degradability, such  
as the fruits-and-vegetables wastes (FVW) another carbohydrates rich lignocellulosic material [9].

86 Indeed, combination of substrates has been previously assayed through the co-digestion  
processes. These are characterized by the simultaneous processing of an incompletely degraded  
88 and microbiologically rich substrate (e.g. sewage sludge, pig manure, cow manure, waste  
activated sludge) and a carbohydrate rich substrate (e.g. sugarcane bagasse, rice straw, corn  
90 stover, corn stalk, wheat straw, cassava stillage) [10]. Co-digestion has been resorted for its  
advantages, such as dilution of toxic compounds, improvement of nutrients balance  
92 (carbohydrates/proteins) [11] and microbial synergies [10]. Recently, co-digestion of vegetable  
and food wastes with cow manure has been associated to process stability, but not necessarily  
94 with improved biomethane production [12].

Even though lignocellulosic biomasses have been successfully co-digested with microbial rich  
96 sludges or manures for hydrogen production (e.g. cassava stillage and food waste) [10,13], the  
co-processing of the CS and FVW has not been previously assayed elsewhere. Researching this  
98 kind of alternatives would be useful in the development of future biorefineries by avoiding mono-  
substrates implicit hurdles, such as seasonality and lack of nutrients, and improving supply chain  
100 management through the reduction of delivery costs and harmful impacts related to climate  
change and fossil depletion [14,15].

102 In this work, the main aim was to evaluate how the mix ratio of FVW and CS affected the  
production of hydrolyzates used in biohydrogen production. Specifically, design of experiments  
104 were developed for insightful determination of the effects of acid catalyst on reducing sugars  
production, and thereafter the effects of reducing sugars concentration and the inoculum to  
106 substrate ratio on biohydrogen production. As it is becoming of utter importance to assess the

economics of bioenergetics (hydrogen, methane, bioethanol), an economic prospection at the  
108 laboratory level was also developed.

## 2. Material and Methods

### 110 2.1. Feedstocks

The CS feedstock obtained from Cuencamé, Durango, Mexico, was dried at 85 °C during 24 h.  
112 Subsequently, dried CS was grinded to a particle size of 180 µm using a manual mill.

The characterization of the CS was made following methods previously reported [2]: pH 7.54,  
114 total solids (TS) 94.59%, volatile solids (VS) 89.78%<sub>dry basis</sub> and ashes 10.22%<sub>dry basis</sub>. The main  
composition of the CS in dry basis (db) was 33.25%<sub>db</sub> cellulose, 24.35%<sub>db</sub> hemicellulose, 24.74%<sub>db</sub>  
116 lignin, 3.25%<sub>db</sub> protein and 10.19%<sub>db</sub> extractives. The elemental composition of CS was C-43.84%,  
H-15.74%, O-39.98% and N-0.44%.

118 The FVW were collected from a local cafeteria (Facultad de Ciencias Químicas, Universidad  
Autónoma de Nuevo León, Nuevo León, México). FVW were shredded (Hamilton Beach, Food  
120 Processor) and dried at 85 °C during 24 h, and grinded to a particle size of 180 µm using a mortar.  
FVW consisted of (wet weight basis): papaya peels (16.94%), squash peels (15.57%), potato  
122 peels (17.67%), spinach stems (20.26%); parsley stems (6.71%), cucumber peels (5.72%); melon  
peels (10.20%) and apple residues (6.92%). FVW presented pH 5.52, total solids 10.19%, volatile  
124 solids 87.66%<sub>db</sub> and 12.34%<sub>db</sub> of ashes. Further characterization of this material showed as  
composition of 12.8%<sub>db</sub> cellulose, 23.4%<sub>db</sub> hemicellulose, 10.26%<sub>db</sub> lignin, 12.63%<sub>db</sub> protein and  
126 38.11%<sub>db</sub> extractives. The elemental composition of FVW was C-51.69%, H-3.43%, O-42.69% and  
N-2.19%.

128

### 2.2. Dilute acid hydrolysis pretreatment

130 Dilute acid hydrolysis was evaluated using a 5 × 2 general factorial experimental design [16]. The  
factors were the FVW to CS ratio (0:1, 1:3, 1:1, 3:1, 1:0 FVW:CS<sub>db</sub>) and the type of acid catalyst  
132 (HCl or H<sub>2</sub>SO<sub>4</sub>, 0.5% in volumetric basis). The acid hydrolysis was carried out by triplicate in a

block digester (DRB 200, HACH, U.S.A.); the co-substrates preparations were put into HACH  
134 tubes at 6.6% of total solid content and the reaction volume was 5 mL. The hydrolysis time and  
temperature were set at 120 min and 120 °C [17,18]. After the hydrolysis pretreatment, solid  
136 residues were removed by centrifugation at 10 000 g, 10 min. Liquid hydrolyzates (LH) were used  
for sugar analysis (reducing and monomeric sugars) and for the determination of degradation  
138 products (furfural; 5-hydroxymethyl-furfural, HMF; total phenolic compounds, TPC; formic acid;  
acetic acid; propionic acid; succinic acid; lactic acid) according to the method reported by Muñoz-  
140 Páez *et al* [19].

After obtaining the LH, these were processed to remove inhibitory compounds (i.e. HMF,  
142 furfural, TPC). For that, the pH was adjusted to pH 10 by adding powder  $\text{Ca}(\text{OH})_2$  and continuous  
stirring for an hour. The formed precipitate was separated by centrifugation at 10 000 g, 15 min;  
144 supernatants were decanted and neutralized to pH 7 by HCl 6 M addition [20].

### 146 2.3. Dark fermentation of LH

Hydrogenogenic inoculum was obtained from an anaerobic digester fed with FVW at 30 days of  
148 hydraulic retention time, started-up according to the Poggi-Varaldo *et al.* [21]. To inhibit methane-  
producing microflora, the anaerobic sludge was heat-shock treated in boiling water at 96 °C for 2  
150 h [22].

The effects of inoculum to substrate ratio ( $\text{ISR} = \text{g VS}_{\text{inoculum}} \text{g VS}_{\text{substrate}}^{-1}$ ) and initial reducing  
152 sugars concentration ( $C_{RS,i}$ ) on the hydrogen production were evaluated using a  $3^2$  factorial design.  
The levels for ISR and  $C_{RS,i}$  were 0.8, 1.0, 1.2 and 10, 13, 16  $\text{g L}^{-1}$ , respectively.

154 Batch dark fermentation experiments were carried out by duplicate in 120 mL serum bottles  
with 70 mL of working volume. The  $C_{RS,i}$  was adjusted by dilution of concentrated LH (ca. 21.13 g  
156  $\text{L}^{-1}$ ) according to the experimental design. The fermentation was supplemented with 0.4 mL of 200  
fold concentrated mineral medium [22]. After inoculation, each bottle was flushed during 3 min  
158 with nitrogen to promote anaerobic conditions and sealed with a rubber stopper and aluminum

rings. The serum bottles were incubated at 35 °C in a controlled temperature incubator with orbital  
160 agitation (150 rpm).

#### 162 2.4. Analytical methods

The pH of co-substrates was determined according to proceeding described by NMX-AA-25-1984  
164 [23]; 5 g of CS or FVW were diluted with 25 ml of distilled water, stirred for 10 min, and finally  
measure using a pH-meter (Conductronic PC45, Mexico). Total solids (TS), volatile solids (VS)  
166 and ashes were measured according standard methods [24]. Cellulose and insoluble lignin  
analysis were determined by gravimetric method according to AOAC [25]. The hemicellulose  
168 amount was determined by difference between holocellulose and cellulose content. Holocellulose  
was determined by lignin oxidation using NaClO according to AOAC modified proceeding [26].  
170 Extractives were measured by water extraction in a water bath at 60°C during 24 h [27]. Elemental  
quantities of carbon, hydrogen, oxygen and nitrogen were determined by organic elemental  
172 analyzer (Thermo Scientific Flash 2000, U.S.A.).

The content of total reducing sugars (RS) in LH was determined by 3,5-dinitrosalicylic acid  
174 method (dextrose as the standard) [28]. Monomeric sugars were quantified by high performance  
liquid chromatography (LDC Analytical, U.S.A.) with a Rezex RHM-Monosacharide (300mm x 7.8  
176 mm) column and a refractive index detector (Varian Prostar, U.S.A.) with H<sub>2</sub>O as mobile phase.  
The column temperature and mobile phase flow rate were 65 °C and 0.6 mL min<sup>-1</sup>, respectively;  
178 glucose, xylose and arabinose were used as standards.

The content of total phenolic compounds (TPC) was determined by colorimetric method using  
180 Folin Ciocalteu reactive (tannic acid as standard) proposed by Blainski *et al.* [29]. The subproducts  
of the acid hydrolysis (furfural, HMF, formic acid, acetic acid, propionic acid, succinic acid, and  
182 lactic acid) were determined against standards bought from Sigma Aldrich. These compounds  
were analyzed using a gas chromatograph (Varian CP 3380, U.S.A.) equipped with a column ZB-  
184 FFAP (15m x 0.53 x 1 µm) and flame ionization detector (FID). The temperatures of the injector



and the detector were 230 and 280 °C, respectively. The column was first heated to 90 °C for 3  
186 min, then the temperature was raised gradually to 200 °C with the step rate of 20 °C min<sup>-1</sup>, the  
temperature was set at 200°C for 3 min and finally raised to 250 °C at 30 °C min<sup>-1</sup>, which was then  
188 kept for 4 min. Calibration curves were previously developed using pure components.

Hydrogen gas content was determined using a gas chromatograph (Thermo Scientific Trace  
190 1310, U.S.A.) equipped with a molecular sieve column (TG-BOND Msieve 5A, 30 m x 0.33 mm)  
and thermal conductivity detector (TCD). The temperatures of the oven, injector and detector were  
192 100 °C, 150 °C and 200°C, respectively. Nitrogen gas was used as carrier gas with a flow rate of  
3 mL min<sup>-1</sup>. The amount of total gas produced was determined by acid-brine displacement method.

194 Volatile fatty acids (i.e acetic acid, propionic acid, butyric acid) and solvent (ethanol)  
composition in the liquid phase were determined by using a gas chromatograph (Thermo Scientific  
196 Trace 1310, U.S.A) as described in our previous publication [22] .

## 198 2.5. Calculations and statistical analysis

Hydrolysis potential (*HP*, g mol<sup>-1</sup> H<sub>3</sub>O<sup>+</sup>) was considered as the quotient of RS concentration, *C<sub>RS</sub>*  
200 in g L<sup>-1</sup>, and the theoretical hydronium concentration of the acid catalyst, *C<sub>H<sub>3</sub>O<sup>+</sup></sub>* as mol H<sub>3</sub>O<sup>+</sup> L<sup>-1</sup>, as  
described in Eq. 1. According to the concentration 0.5% volumetric basis for H<sub>2</sub>SO<sub>4</sub> and HCl used  
202 for the hydrolysis experiments, their respective theoretical hydronium ion concentrations were  
0.193 and 0.447 mol H<sub>3</sub>O<sup>+</sup> L<sup>-1</sup>.

$$204 \quad HP = \frac{C_{RS}}{C_{H_3O^+}} \quad (1)$$

Reducing sugars production yield, *Y<sub>RS</sub>* (%), was calculated comparing the *C<sub>RS</sub>* and the total  
206 carbohydrates content in the co-substrates (Eq. 2):

$$Y_{RS} = \frac{C_{RS} \cdot V_r}{m_H \cdot (H_{CS} \cdot C_{cs} + H_{FVW} \cdot C_{FVW})} \cdot 100 \quad (2)$$

208 where  $V_r$  is the hydrolysis volume (L),  $m_H$  is the co-substrates mass (g),  $H_{CS}$  and  $H_{FVW}$  are the total  
 carbohydrates content (considered as the sum of cellulose, hemicellulose and extractives) in CS  
 210 and FVW in dry basis ( $\text{g g}^{-1}$ ), respectively, whereas  $C_{CS}$  and  $C_{FVW}$  are the CS and FVW mass  
 concentration in each co-substrate preparation ( $\text{g g}^{-1}$ ), respectively.

212 The hydrogen cumulative hydrogen production,  $H(t)$  ( $\text{mL H}_2$ ), was fitted by the modified  
 Gompertz equation (Eq. 3), to estimate maximum cumulative  $\text{H}_2$  production,  $H_{max}$  ( $\text{mL H}_2$ ),  
 214 maximum  $\text{H}_2$  production rate,  $R_{max}$ , ( $\text{mL H}_2 \text{ h}^{-1}$ ), and lag time,  $\lambda$  (h) [30]:

$$H(t) = H_{\max} \cdot \exp \left\{ -\exp \left[ \frac{R_{\max}}{H_{\max}} \cdot e \cdot (\lambda - t) + 1 \right] \right\} \quad (3)$$

216 where  $t$  is any time (h) and  $e$  is 2.718.

The hydrogen molar yield in terms of glucose equivalents consumed ( $Y_{\text{H}_2} \text{ mol H}_2 \text{ mol}^{-1}_{\text{glucose}}$ )  
 218 was determined according Eq. 4:

$$Y_{\text{H}_2} = \frac{H_{\max} \cdot (MW_{\text{glucose}})}{V_R \cdot (C_{RS_o} - C_{RS_f}) \cdot (V_M) \cdot 1000} \quad (4)$$

220 where  $V_R$  is the fermentation volume (L),  $C_{RS,i}$  and  $C_{RS,f}$  are the initial and final RS  
 concentrations ( $\text{g L}^{-1}$ ), respectively,  $MW_{\text{glucose}}$  is the glucose molar weight ( $180.16 \text{ g mol}^{-1}$ ),  $V_M$  is  
 222 the molar volume at standard reference conditions ( $22.4 \text{ L mol H}_2^{-1}$ ) and 1000 is a volume  
 conversion factor ( $\text{mL L}^{-1}$ ).

224 Analysis of variance (ANOVA) was performed for the experimental designs in the hydrolyzates  
 and hydrogen production, using Design-Expert 6.0 (Design-Ease Inc. Co., Minneapolis, USA).

226 The main effects of the factors evaluated in the experimental designs were calculated according  
 to Montgomery [16]. In the dilute acid hydrolysis experimental design, reducing sugars yield ( $Y_{RS}$ ),

228 HMF concentration, furfural concentration and TPC were selected to evaluate the main effects,  
 whereas for the dark fermentation experimental design the maximum cumulative hydrogen

230 production ( $H_{max}$ ) and hydrogen molar yield ( $Y_{\text{H}_2}$ ) were selected. The standard error of the

experimental designs was calculated from the square root of the mean square of the error divided  
232 by the number of experimental repetitions.

## 234 2.6. Economic prospection

The economic prospection accounted the expenses from the main operation stages, and the  
236 substances and compounds required for the process. The prospection considered the processing  
of 1 kg preparation of 3:1 FVW:CS, including the size reduction, acid hydrolysis and dark  
238 fermentation. The size reduction accounted the shredding of FVW in a food processor whereas  
CS was milled in a vibratory mill. Afterwards, the co-substrates mixture was acid hydrolyzed using  
240 HCl (0.5% volume basis, 2 h, 120 °C). The LH were recovered by centrifugation (10 000 g, 10  
min) and were overlimed with Ca(OH)<sub>2</sub> (1 h, room temperature). After centrifugation (*ibid.*), LH  
242 were neutralized using HCl (6 M). The LH were fed to a bioreactor with hydrogenogenic inoculum  
(35 °C). The same mineral composition as in the experiments was considered. Hydrogen content  
244 in biogas was 50.1% and hydrogen yield was 1.91 mol H<sub>2</sub> mol<sup>-1</sup><sub>glucose</sub>.

Collection costs of the substrates were retrieved from literature. Thompson and Tyner [31]  
246 calculated the collection, baling and transport costs of CS at farms. For the cost of collection and  
transport of FVW, an average was obtained after the works of Yepes *et al.* [32] and Mattsson *et*  
248 *al.* [33], who evaluated the management for FVW valorization in production fields and cities,  
respectively. Operation costs for the processing of FVW and CS, and hydrogen production, were  
250 calculated from energy balances and the Mexican electricity rates at industry [34]. Water cost was  
taken from Mexican National Water Commission [35]. Chemicals for acid hydrolysis, overliming  
252 and mineral medium were taken from different market sources.

The energy calculations from shredding, milling and overliming were obtained as previously  
254 described [36]. The energy consumption of acid hydrolysis was determined according to Mafe *et*  
*al.* [37]. The energy balance in dark fermentation reactor was carried out as described by Lübken

256 *et al.* [38]. The total process revenue was determined from the market price of H<sub>2</sub> and CO<sub>2</sub> [39]  
and their productivities.

258

### 3. Results and Discussion

#### 3.1. Diluted acid hydrolysis pretreatment

The highest concentrations of RS were obtained at 1:0 FVW:CS ratio, being 19.32 and 27.32 g  
262 L<sup>-1</sup> for H<sub>2</sub>SO<sub>4</sub> and HCl, respectively (Fig. 1A), probably as a consequence of a number of factors  
such as: a greater digestibility of FVW over CS, heterogeneous composition of FVW, lower lignin  
264 content and lower degradation temperature [9]. Regarding the co-substrate preparations, the  
maximum RS were 24.69 and 17.99 g L<sup>-1</sup> for HCl and H<sub>2</sub>SO<sub>4</sub>, respectively, obtained from the 3:1  
266 FVW:CS ratio.

268 **PLEASE INSERT FIGURE 1**

270 The HCl as acid catalyst presented higher RS production than H<sub>2</sub>SO<sub>4</sub> at each co-substrate ratio,  
probably influenced by its 2.32 times higher concentration of hydronium ion than H<sub>2</sub>SO<sub>4</sub> treatments.  
272 However, when observing the *HP* (Fig. 1B), H<sub>2</sub>SO<sub>4</sub> was better than HCl in achieving a *HP* of 100.33  
g mol<sup>-1</sup> H<sub>3</sub>O<sup>+</sup> at 1:0 FVW:CS ratio, versus 61.13 g mol<sup>-1</sup> H<sub>3</sub>O<sup>+</sup> for HCl at same ratio. Hilpmann *et*  
274 *al.* [40] observed that hydronium concentration is one of the several factors that have influence on  
the efficiency of the acid hydrolysis of xylan. They found that hydronium concentrations lower than  
276 0.1 M presented yields below 86%, whereas hydronium concentrations higher than 0.1 M  
promoted yields close to 100%. It is worth noticing that due to the lower corrosivity of H<sub>2</sub>SO<sub>4</sub>  
278 compared to HCl or HNO<sub>3</sub>, it has been the most used catalyst in hydrolysis processes of  
lignocellulosic wastes [41,42].

280 The main effects analysis (Fig. 2) showed that the maximum  $Y_{RS}$  was observed at 1:0 FVW:CS  
ratio, which corroborated the ease of degradation of FVW and also demonstrated a correlation

282 amidst the contents of FVW and  $Y_{RS}$  (Fig. 2A). Regarding the type of acid catalysts influence on  
284  $Y_{RS}$ , HCl was superior over  $H_2SO_4$  (Fig 2B), thus the combination of high contents of FVW and  
286 HCl is advisable to promote high  $Y_{RS}$ . The ANOVA (Table S1) of  $Y_{RS}$  showed that the model, the  
co-substrate ratios, the acid catalyst and their interaction were significant ( $p < 0.0053$ ). The  $R^2$   
and  $R^2_{adj}$  were 0.8411 and 0.7696, respectively.

288 **PLEASE INSERT FIGURE 2**

290 Regarding the production and distribution of monosaccharides, noticeable differences were  
observed amidst the type of catalyst as shown in Fig. 3. When using HCl as catalyst (Fig. 3A),  
292 maximal concentrations of glucose were obtained at 3:1 FVW:CS ratio ( $10.02 \text{ g L}^{-1}$ ), and at 1:3  
FVW:CS for xylose ( $8.41 \text{ g L}^{-1}$ ). No particular trends were appreciated after  $H_2SO_4$  treatment (Fig.  
294 3B). In the experiments with HCl, it was observed that the ratios with higher CS content presented  
higher xylose concentrations, whereas those ratios with higher FVW presented higher glucose  
296 concentrations. This difference is interesting and has also been reported elsewhere. For instance,  
Zu *et al.* [43] evaluated the CS hydrolysis with HCl as acid catalyst and found that xylose yield  
298 was also higher than that of glucose (20.44 and  $1.82 \text{ g per } 100 \text{ g}_{\text{raw material}}$ , respectively) at  $120 \text{ }^\circ\text{C}$ ,  
40 min and 1% HCl. Similarly, Cao *et al.* [44] found higher xylose concentrations than glucose  
300 ( $6.25$  and  $1.68 \text{ g L}^{-1}$ , respectively) when assessing the CS acid hydrolysis with  $H_2SO_4$  at  $121 \text{ }^\circ\text{C}$ ,  
105 min, and 0.25%  $H_2SO_4$ , ascribing this phenomenon to the easier hemicellulose solubilization  
302 than cellulose by acid catalyst in this particular substrate.

304 **PLEASE INSERT FIGURE 3**

306 An undesirable trait about the acid hydrolysis processes is the concomitant degradation of  
hydrolyzed carbohydrates into compounds such as furfural and HMF, and the lignin degradation

308 into acetic acid and phenolic compounds, which altogether act as inhibitors to microbial growth  
[5,41]. In our experiments, there were significant differences ( $p < 0.0085$ ) of both the acid catalysts  
310 and the FVW:CS ratio on HMF, furfural and TPC production (Table S2, Table S3 and Table S4,  
respectively). Fig. 4 shows that for HMF and TPC, their concentrations were higher for HCl and  
312 as FVW increased its proportion. Regarding furfural, HCl also produced higher concentrations  
than  $H_2SO_4$ , although FVW effect was not as evident as in HMF and TPC showing a maximum at  
314 1:3 and a minimum at 3:1 FVW:CS ratios. These observations have some relation to that observed  
for  $Y_{RS}$ , and the respective explanation is also applicable to this case: FVW is a substrate much  
316 easier to degrade, and HCl provides higher  $H^+$  concentration than  $H_2SO_4$  when both substances  
are assayed at the same volumetric concentration.

318

**PLEASE INSERT FIGURE 4**

320

The concentrations of HMF, furfural and TPC in our experiments (Table 1) were lower than the  
322 inhibitory concentrations ( $<1 \text{ g L}^{-1}$ ) reported for dark fermentation of mixed cultures, except for the  
hydrolyzates at 1:0 FVW:CS ratio and HCl [45]. Moreover, when two or more inhibitors are present  
324 in the substrate medium, inhibition concentrations may be considerably lower, yet not consistent  
data has been found amidst literature. For instance, Kumar *et al.* [46] found that at  $0.69 \text{ g HMF L}^{-1}$   
326  $^1$  and  $12 \text{ g formic acid L}^{-1}$  concentrations, microbial growth and hydrogen production were inhibited.  
On the other hand, Zheng *et al.* [18] reported that up to  $4 \text{ g L}^{-1}$  of HMF or furfural and  $6 \text{ g acetic}$   
328  $\text{acid L}^{-1}$  inhibited microbial metabolism. On their behalf, Muñoz-Páez *et al.* [19] observed that  
individual concentrations of furfural and HMF up to  $1$  and  $0.09 \text{ g L}^{-1}$ , respectively, were even  
330 beneficial for biohydrogen production; yet when concomitantly present, these have inhibited 10%  
the hydrogen production even at low concentrations as  $0.10$  and  $0.02 \text{ g L}^{-1}$  for furfural and HMF,  
332 respectively. In general, the most important inhibitor has been suggested to be HMF, and it should  
be considered that concentrations above  $1 \text{ g L}^{-1}$  in hydrolyzates have reduced the yield in

334 hydrogen bioproduction [5]. Indeed, except for one of our assays, such value was not reached,  
pointing out that our hydrolyzates would be suitable for dark fermentation or anaerobic digestion  
336 [45].

338 **PLEASE INSERT TABLE 1**

340 It is important to note that for both HCl and H<sub>2</sub>SO<sub>4</sub> at 1:0 FVW:CS assays (Fig. 3), no xylose  
content was detected, most likely due to its conversion into furfural and subsequent transformation  
342 into formic, lactic and succinic acids [47]. Indeed, the sum of these latter compounds was around  
9.5 g L<sup>-1</sup>, a concentration comparable to that of xylose at FVW:CS ratio of 1:3.

344 Since the acid hydrolysis of 3:1 FVW:CS with HCl catalyst (Fig.3) showed a balanced  
distribution of glucose, xylose and arabinose, as well as high RS concentration, dark fermentation  
346 was developed in the next section using the hydrolyzates from such conditions. Despite the low  
concentration of inhibitors, the liming treatment was applied to the hydrolyzates to avoid possible  
348 interactions of any kind during the hydrogen production. The overliming treatment decreased both  
the reducing sugars by 11.71% (24.00 to 21.19 g L<sup>-1</sup>) and the TPC by 26.4% (1.06 to 0.78 g L<sup>-1</sup>)  
350 in 26.41%. This diminution of RS was comparable with the 9.1% reduction observed by Chang *et al.* [20]  
when rice husk HCl hydrolyzates were overlimed. The removals of TPC and HMF over  
352 20% are according to expected, whereas it is common that some organic acids might not be  
reduced by overliming [48].

354

### 3.2. Dark fermentation of LH

356 The highest  $H_{max}$  (212 mL H<sub>2</sub>) and  $R_{max}$  (8.83 mL H<sub>2</sub> h<sup>-1</sup>) were obtained for ISR 1.2 and  $C_{RS,i}$  of 13  
g L<sup>-1</sup> (Fig. 5, Table 2). Comparing the cumulative hydrogen production against literature is intricate  
358 due to the different reported operation conditions. For mixed cultures, Datar *et al.* [8] demonstrated  
a cumulative hydrogen volume of 4138 mL when using CS hydrolyzates (10 g L<sup>-1</sup>) in dark

360 fermentation by anaerobic heat-treated sludge (105 °C, 2h) in a 1250 mL CSTR. Their volumetric  
hydrogen productivity, 3310 mL H<sub>2</sub> L<sup>-1</sup><sub>reactor</sub> was 13% higher than our best result of 2933 mL H<sub>2</sub> L<sup>-1</sup>  
362 <sub>reactor</sub> at ISR 1.2 and 13 g RS L<sup>-1</sup> (Table 3). However, in their experiments the longer lag time  
obtained, 38 h, was ascribed to the presence of inhibitory compounds such as HMF and furfural  
364 obtained after extreme hydrolysis conditions (acid steam-explosion 1.2% H<sub>2</sub>SO<sub>4</sub>, 200 °C, 1 min).  
The longest lag time registered in our experiments was 22.5 h for the assay with the lowest  
366 inoculum load (ISR 0.8) and the highest substrate amounts (RS 16 g L<sup>-1</sup>), which could have been  
an indicative of a slower adaptation of hydrogen-microbial producers to substrate [20].

368

PLEASE INSERT FIGURE 5

370 PLEASE INSERT TABLE 2

PLEASE INSERT TABLE 3

372

The ANOVA (Table S5 and Table S6) of this experiment showed that  $C_{RS,i}$  had significant  
374 effects on both  $H_{max}$  and  $Y_{H_2}$ , whereas the ISR did not present significant effects on neither  
response variables in the studied operation range. The main effects of the  $C_{RS,i}$  on the  $H_{max}$  (Fig.  
376 6A) demonstrated that 10 g L<sup>-1</sup> presented the lowest average hydrogen production (183 mL H<sub>2</sub>),  
whereas using 13 or 16 g L<sup>-1</sup> presented higher values (ca. 202 mL H<sub>2</sub>). Oppositely, the main effects  
378 on  $Y_{H_2}$  (Fig. 6B) were higher at  $C_{RS,i}$  10 g L<sup>-1</sup> (2.2 mol H<sub>2</sub> mol glucose<sup>-1</sup>) than at 13 and 16 g L<sup>-1</sup> (1.8  
and 1.9 mol H<sub>2</sub> mol glucose<sup>-1</sup>, respectively). This was in accordance to the reducing sugars  
380 consumption (Table 3): at  $C_{RS,i}$  of 10 and 13 g L<sup>-1</sup> the RS consumption was higher than 94.9%,  
whereas at 16 g L<sup>-1</sup>, it was close to 81%, except for the experiment with ISR 0.8 that presented  
382 ca. 70% consumption, indicating the possible inhibition by substrate or metabolites. Therefore, in  
terms of  $H_{max}$  and  $Y_{H_2}$ , It may be drawn that  $C_{RS,i}$  of 10 and 13 g L<sup>-1</sup> may be the best options for  
384 conducting dark fermentation of hydrolyzates. Fangkum *et al.* [6] reported an increase in  
cumulated hydrogen production (42 to 92 mL H<sub>2</sub>) when the initial concentration of fermentable



386 sugars increased from 5 to 10 g L<sup>-1</sup>; yet when initial concentration of sugars exceeded 20 g L<sup>-1</sup>,  
cumulated hydrogen production decreased mainly due to the accumulation of organic fatty acids,  
388 which was reflected as a drop in pH, causing bacterial growth inhibition. In our experiments, the  
final pH dropped as  $C_{RS,I}$  increased, being the lowest of 5.17 when using RS 16 g L<sup>-1</sup> at ISR 0.8  
390 (Table 3).

392 **PLEASE INSERT FIGURE 6**

394 Comparing our highest molar yields of 1.9-2.3 mol H<sub>2</sub> mol glucose<sup>-1</sup> amidst the range 0.8-1.2  
ISR (Table 3) to literature (Table 4), ours were higher than some using pure cultures as in the  
396 case of Pattra *et al.* [49] who reported 1.73 mol H<sub>2</sub> mol glucose<sup>-1</sup> by *Clostridium butyricum* when  
fermenting sugarcane acid hydrolyzates at higher concentration (20 g L<sup>-1</sup>); or as in the case of  
398 Cao *et al.* [44] who obtained 2.24 mol H<sub>2</sub> mol glucose<sup>-1</sup> by *Thermoanaerobacterium*  
*thermosaccharolyticum* W16 fermenting 12 g L<sup>-1</sup> of sugars from corn hydrolyzates at thermophilic  
400 temperatures (60 °C). Using microbial consortia, Zhang *et al.* [50] obtained low hydrogen yields  
(0.35 mol H<sub>2</sub> mol glucose<sup>-1</sup>) with an anaerobic granular sludge at 37 °C, whereas at 55 °C the  
402 hydrogen yield was increased to 1.39 mol H<sub>2</sub> mol glucose<sup>-1</sup>. The main difference from our  
experiments against those listed in Table 4 was our noticeably higher ISR. Indeed, the next highest  
404 ISR, 0.4, was that from Datar *et al.* [8], who indeed obtained the highest  $Y_{H_2}$ . Our results have  
demonstrated that it was feasible to hydrolyze preparations of FVW and CS, and to use the sugars  
406 released to achieve competent batch hydrogen production by microbial consortia.

408 **PLEASE INSERT TABLE 4**

410 Regarding the metabolites produced, in all the experiments butyrate was the most abundant,  
followed by acetate and lastly by propionate. High butyrate concentrations are indicative of the

412 predominance of the butyrogenic pathway in this dark fermentation hydrogen production [5]. On  
the other hand, low propionate concentrations is advantageous since it may indicate low presence  
414 of propionogenic microorganisms that use H<sub>2</sub> as electron donor [51]. Low ethanol concentrations  
are attributed to a low partial pressure effect due to the frequent hydrogen depressurization. Since  
416 a high variation in the partial pressure may change the route of metabolites production (i.e.  
solvents such as ethanol, acetone or butanol instead of VFA) [7,52].

418

### 3.3. *Economic prospection*

420 A net benefit of 0.009 USD per kg of co-substrates (wet basis) processed was observed (Table  
5). The total costs were 0.029 USD/kg (including energy, water and chemicals), whereas the  
422 revenue for H<sub>2</sub> and CO<sub>2</sub> produced was 0.038 USD/kg. The costs were distributed as 54% related  
to FVW and CS supply, 26% due to substances and compounds, and the remaining 20% to  
424 electricity consumption. From this analysis, it is evident that waste biomass long before considered  
to be low cost [53] is not necessarily so. Different alternatives have been implemented to reduce  
426 such related production costs, such as government funding and subsidies [39].

The unit costs for H<sub>2</sub> and CO<sub>2</sub> considering a revenue-based allocation were 2.05 and 0.3  
428 USD/m<sup>3</sup>, respectively. The market price of H<sub>2</sub> and CO<sub>2</sub> are 2.7 and 0.3 USD/m<sup>3</sup>, which indicates  
the profitability in hydrogen production of 24%. Indeed, hydrogen cost was comparable to other  
430 works in literature using different substrates. For instance, Han *et al.* [54] reported a cost of 2.29  
USD/m<sup>3</sup> H<sub>2</sub> from the techno-economic analysis of hydrogen production from food waste by  
432 integrated solid state fermentation and dark fermentation. The plant capacity was proposed to be  
10 ton/d, and yield was 52.4 mL H<sub>2</sub>/g food waste. Using bread waste, Han *et al.* [39] reported a  
434 production cost of 1.34 USD/m<sup>3</sup> for the continuous hydrogen production in a 2 ton/d CSTR.

The production of hydrogen from hydrolyzates of FVW and CS has shown a promissory  
436 alternative for the development of biorefinery models. Still, as hydrogen production finds  
alternatives of production from different substrates, biorefinery configurations and operation

438 conditions, it is becoming necessary to improve economic evaluations. We envisage areas of  
opportunity that will have consequences both for revenues and costs. For instance, the process  
440 profitability can be improved if the sub-products as organic acids and solvents from dark  
fermentation are further processed (e.g. hydrogen production by the photofermentation or  
442 methane production by anaerobic digestion) or marketed, as in the case of un-solubilized biomass  
that could be sold as biofertilizer. On the other hand, equipment, construction, and other operating  
444 costs such as gas compression, salaries and taxes will increase production costs [55].

446 **PLEASE INSERT TABLE 5**

#### 448 **4. Conclusion**

The main conclusions of this work were several and noteworthy. They arranged according to the  
450 principal sections of the research, as follows:

- 452 *i)* Hydrolysis. HCl as acid catalyst was superior than H<sub>2</sub>SO<sub>4</sub> in terms of amount and  
quality of hydrolyzates, and the 3:1 FVW:CS ratio using HCl resulted in the highest  
production of reducing sugars in a balanced distribution of the monosaccharides  
454 glucose, xylose and arabinose.
- 456 *ii)* Dark fermentation. The FVW:CS sugar-rich hydrolyzates were efficiently fermented.  
Moreover, the initial concentration of reducing sugars had important and significant  
effects both on maximum hydrogen production and yield. H<sub>2</sub> production was not  
458 dependent by inoculum to substrate ratio in the range 0.8 to 1.2 g VS<sub>inoculum</sub> g VS<sub>substrate</sub><sup>-1</sup>.  
Concentrations of 10 and 13 g L<sup>-1</sup> are suitable for conducting competent dark  
460 fermentation of hydrolyzates.
- 462 *iii)* Economic prospection. Hydrogen production presented economic benefits, such as net  
revenues of 0.009 USD per kg of co-substrates (wet basis) processed and H<sub>2</sub> unit cost

below its market price, resulting in 24 % profitability of hydrogen production. The main  
464 costs were associated to FVW and CS supply.

Finally, the production of hydrogen from hydrolyzates of FVW and CS, as alternative to mono-  
466 substrates fermentation, has shown a promissory option for the development of biorefinery  
models.

## 468 **Acknowledgements**

The authors express their gratitude to Dr. Eduardo Soto Regalado and Dr. Felipe Cerino Córdova  
470 for supporting the project (02-106534-PST-15/123), and to Dr. Refugio Bernardo García Reyes,  
Dr. Luis H. Alvarez, Chem. Eng. Gustavo Gerardo Medina Mendoza and Damián Isaac Peña-  
472 Ramírez for their support in analysis determination. Santiago Rodríguez-Valderrama thanks  
Consejo Nacional de Ciencia y Tecnología (Conacyt) for the Scholarship No. 714579.

474

## **References**

- 476
- 478
- 480
- 482
- 484
- 486
- 488
- 490
- 492
- 494
- 496
- [1] M.E. Nissilä, C. Lay, J.A. Puhakka, Dark fermentative hydrogen production from lignocellulosic hydrolyzates-A review, *Biomass and Bioenergy*. 67 (2014) 145–159. doi:10.1016/j.biombioe.2014.04.035.
  - [2] C. Escamilla-Alvarado, T. Ponce-Noyola, E. Ríos-Leal, H.M. Poggi-Varaldo, A multivariable evaluation of biohydrogen production by solid substrate fermentation of organic municipal wastes in semi-continuous and batch operation, *Int. J. Hydrogen Energy*. 38 (2013) 12527–12538. doi:10.1016/j.ijhydene.2013.02.124.
  - [3] SAGARPA, Planeación agrícola nacional 2017-2030, 2017.
  - [4] I. Valdez-Vazquez, J.A. Acevedo-Benítez, C. Hernández-Santiago, Distribution and potential of bioenergy resources from agricultural activities in Mexico, *Renew. Sustain. Energy Rev.* 14 (2010) 2147–2153. doi:10.1016/j.rser.2010.03.034.
  - [5] R.R. Gonzales, P. Sivagurunathan, S.-H. Kim, Effect of severity on dilute acid pretreatment of lignocellulosic biomass and the following hydrogen fermentation, *Int. J. Hydrogen Energy*. 41 (2016) 21678–21684. doi:10.1016/j.ijhydene.2016.06.198.
  - [6] A. Fangkum, A. Reungsang, Biohydrogen production from sugarcane bagasse hydrolysate by elephant dung: Effects of initial pH and substrate concentration, *Int. J. Hydrogen Energy*. 36 (2011) 8687–8696. doi:10.1016/j.ijhydene.2010.05.119.
  - [7] Y.M. Wong, T.Y. Wu, J. Ching-Juan, A review of sustainable hydrogen production using seed sludge via dark fermentation, *Renew. Sustain. Energy Rev.* 34 (2014) 471–482. doi:10.1016/j.rser.2014.03.008.
  - [8] R. Datar, J. Huang, P.C. Maness, A. Mohagheghi, S. Czernik, E. Chornet, Hydrogen production from the fermentation of corn stover biomass pretreated with a steam-explosion process, *Int. J. Hydrogen Energy*. 32 (2007) 932–939. doi:10.1016/j.ijhydene.2006.09.027.
  - [9] A. Razaghi, O.P. Karthikeyan, H.. Nguyen Hao, K. Heinamm, Hydrolysis treatments of fruit and vegetable

- 498 waste for production of biofuel precursors, *Bioresour. Technol.* 217 (2016) 100–103.  
doi:10.1016/j.biortech.2016.03.041.
- 500 [10] W. Wang, L. Xie, G. Luo, Q. Zhou, Enhanced fermentative hydrogen production from cassava stillage by co-  
502 digestion: The effects of different co-substrates, *Int. J. Hydrogen Energy.* 38 (2013) 6980–6988.  
doi:10.1016/j.ijhydene.2013.04.004.
- [11] W. Wang, L. Xie, J. Chen, G. Luo, Q. Zhou, Biohydrogen and methane production by co-digestion of cassava  
504 stillage and excess sludge under thermophilic condition, *Bioresour. Technol.* 102 (2011) 3833–3839.  
doi:10.1016/j.biortech.2010.12.012.
- 506 [12] L.R. Miramontes-Martínez, R. Gomez-Gonzalez, J.E. Botello-Alvarez, C. Escamilla-Alvarado, A. Albalate-  
Ramírez, P. Rivas-García, Semi-continuous anaerobic co-digestion of vegetable waste and cow manure: a  
508 study of process stabilization, *Rev. Mex. Ing. Química.* 19 (2020) 1117–1134.  
<http://www.redalyc.org/articulo.oa?id=62029966013>.
- 510 [13] S.H. Kim, S.K. Han, H.S. Shin, Feasibility of biohydrogen production by anaerobic co-digestion of food waste  
and sewage sludge, *Int. J. Hydrogen Energy.* 29 (2004) 1607–1616. doi:10.1016/j.ijhydene.2004.02.018.
- 512 [14] A. Sultana, A. Kumar, Optimal configuration and combination of multiple lignocellulosic biomass feedstocks  
delivery to a biorefinery, *Bioresour. Technol.* 102 (2011) 9947–9956. doi:10.1016/j.biortech.2011.07.119.
- 514 [15] A.L. Borrión, M.C. McManus, G.P. Hammond, Environmental life cycle assessment of bioethanol production  
from wheat straw, *Biomass and Bioenergy.* 47 (2012) 9–19. doi:10.1016/j.biombioe.2012.10.017.
- 516 [16] D.C. Montgomery, Design and analysis of experiments, in: 2004: pp. 194–201.
- [17] S. Kumar, P. Dheeran, S.P. Singh, I.M. Mishra, D.K. Adhikari, Kinetic studies of two-stage sulphuric acid  
518 hydrolysis of sugarcane bagasse, *Renew. Energy.* 83 (2015) 850–858. doi:10.1016/j.renene.2015.05.033.
- [18] Y. Zheng, C. Lee, C. Yu, Y.S. Cheng, R. Zhang, B.M. Jenkins, J.S. VanderGheynst, Dilute acid pretreatment  
520 and fermentation of sugar beet pulp to ethanol, *Appl. Energy.* 105 (2013) 1–7.  
doi:10.1016/j.apenergy.2012.11.070.
- 522 [19] K.M. Muñoz-Páez, E.L. Alvarado-Michi, G. Buitrón, I. Valdez-Vazquez, Distinct effects of furfural,  
hydroxymethylfurfural and its mixtures on dark fermentation hydrogen production and microbial structure of a  
524 mixed culture, *Int. J. Hydrogen Energy.* 4 (2019) 2289–2297. doi:10.1016/j.ijhydene.2018.04.139.
- [20] A.C.C. Chang, Y.H. Tu, M.H. Huang, C.H. Lay, C.Y. Lin, Hydrogen production by the anaerobic fermentation  
526 from acid hydrolyzed rice straw hydrolysate, *Int. J. Hydrogen Energy.* 36 (2011) 14280–14288.  
doi:10.1016/j.ijhydene.2011.04.142.
- 528 [21] H.M. Poggi-Valardo, L. Valdés, F. Esparza-García, G. Fernández-Villagómez, Solid substrate anaerobic co-  
digestion of paper mill sludge, biosolids, and municipal solid waste, *Water Sci. Technol.* 35 (1997) 197–204.  
530 <http://wst.iwaponline.com/content/35/2-3/197.abstract>.
- [22] S. Rodríguez-Valderrama, C. Escamilla-Alvarado, H.J. Amezcuita-García, J.J. Cano-Gómez, J.P. Magnin, P.  
532 Rivas-García, Evaluation of feeding strategies in upflow anaerobic sludge bed reactor for hydrogenogenesis  
at psychrophilic temperature, *Int. J. Hydrogen Energy.* 44 (2019) 12346–12355.  
534 doi:10.1016/j.ijhydene.2018.09.215.
- [23] NMX-AA-25-1984, Norma Mexicana NMX-AA-25-1984. Protección al ambiente-Contaminación del suelo-  
536 residuos sólidos-determinación del pH-Método potenciométrico, Norma Mex. (1992) 4–5.
- [24] APHA/AWWA/WEF, Standard methods for the examination of water and wastewater, Am. Public Heal. Assoc.  
538 (2005). doi:ISBN 9780875532356.
- [25] AOAC, Official methods of analysis, Assoc. Off. Agric. Chem. Washington, D.C. (1992).

- 540 [26] C. Escamilla-Alvarado, H.M. Poggi-Varaldo, T. Ponce-Noyola, E. Ríos-Leal, I. Robles-Gonzalez, N.  
542 Rinderknecht-Seijas, Saccharification of fermented residues as integral part in a conceptual hydrogen-  
544 producing biorefinery, *Int. J. Hydrogen Energy*. 40 (2015) 17200–17211. doi:10.1016/j.ijhydene.2015.06.164.
- [27] A. Sluiter, R. Ruiz, C. Scarlata, J. Sluiter, D. Templeton, Determination of extractives in biomass, NREL.  
546 (2008).
- [28] G.L. Miller, Use of dinitrosalicylic acid reagent for determination of reducing sugar, *Anal. Chem.* 31 (1959)  
548 426–428. doi:10.1021/ac60147a030.
- [29] A. Blainski, G.C. Lopes, J.C. Palazzo de Mello, Application and analysis of the Folin Ciocalteu method for the  
550 determination of the total phenolic content from *Limonium Brasiliense L.*, *Molecules*. 18 (2013) 6852–6865.  
doi:10.3390/molecules18066852.
- [30] M.H. Zwietering, I. Jongenburger, F.M. Rombouts, K. Van 't Riet, Modeling of the bacterial growth curve, *Appl.*  
552 *Environ. Microbiol.* 56 (1990) 1875–1881.
- [31] J.L. Thompson, W.E. Tyner, Corn stover for bioenergy production: Cost estimates and farmer supply  
554 response, *Biomass and Bioenergy*. 62 (2014) 166–173. doi:10.1016/j.biombioe.2013.12.020.
- [32] S.M. Yepes, L.J. Montolla Naranjo, S. Orozco, Agroindustrial waste valorization-fruits-in-Medellin and the  
556 south of Valle de Aburrá, Colombia, *Rev.Fac.Nal.Agr.Medellín*. 61 (2008) 4422–4431.
- [33] L. Mattsson, H. Williams, J. Berghel, Waste of fresh fruit and vegetables at retailers in Sweden – Measuring  
558 and calculation of mass, economic cost and climate impact, *Resour. Conserv. Recycl.* 130 (2018) 118–126.  
doi:10.1016/j.resconrec.2017.10.037.
- [34] Comisión Federal de Electricidad, Tarifas CFE industrial, (2020).  
560 <https://app.cfe.mx/Aplicaciones/CCFE/Tarifas/TarifasCREIndustria/Tarifas/GranDemandaMTO.aspx>  
(accessed May 30, 2020).
- [35] Conagua, Tarifas de agua, México, (2020).  
562 <http://sina.conagua.gob.mx/sina/tema.php?tema=tarifas&ver=reporte&o=0&n=nacional> (accessed May 30,  
564 2020).
- [36] S. Rodríguez-Valderrama, Enfoque de biorrefinería para la producción de hidrógeno y metano a partir de  
566 residuos orgánicos, Universidad Autónoma de Nuevo León, 2018.
- [37] O.A.T. Mafe, S.M. Davies, J. Hancock, C. Du, Development of an estimation model for the evaluation of the  
568 energy requirement of dilute acid pretreatments of biomass, *Biomass and Bioenergy*. 72 (2015) 28–38.  
doi:10.1016/j.biombioe.2014.11.024.
- [38] M. Lübken, M. Wichern, M. Schlattmann, A. Gronauer, H. Horn, Modelling the energy balance of an anaerobic  
570 digester fed with cattle manure and renewable energy crops, *Water Res.* 41 (2007) 4085–4096.  
572 doi:10.1016/j.watres.2007.05.061.
- [39] W. Han, Y.Y. Hu, S.Y. Li, F.F. Li, J.H. Tang, Biohydrogen production from waste bread in a continuous stirred  
574 tank reactor: A techno-economic analysis, *Bioresour. Technol.* 221 (2016) 318–323.  
doi:10.1016/j.biortech.2016.09.055.
- [40] G. Hilpmann, N. Becher, F.A. Pahner, B. Kusema, P. Mäki-Arvela, R. Lange, D.Y. Murzin, T. Salmi, Acid  
576 hydrolysis of xylan, *Catal. Today*. 259 (2014) 376–380. doi:10.1016/j.cattod.2015.04.044.
- [41] G.S. Hutomo, A. Rahim, S. Kadir, The effect of sulfuric and hydrochloric acid on cellulose degradation from  
578 pod husk cacao, *Int. J. Curr. Microbiol. Appl. Sci.* 4 (2015) 89–95.
- [42] H. Argun, G. Onaran, Glucose and 5-hydroxymethylfurfural production from cellulosic waste by sequential  
580 alkaline and acid hydrolysis, *Renew. Energy*. 96 (2016) 442–449. doi:10.1016/j.renene.2016.04.082.

- 582 [43] S. Zu, W. zhi Li, M. Zhang, Z. Li, Z. Wang, H. Jameel, H. min Chang, Pretreatment of corn stover for sugar  
production using dilute hydrochloric acid followed by lime, *Bioresour. Technol.* 152 (2014) 364–370.  
584 doi:10.1016/j.biortech.2013.11.034.
- [44] G. Cao, N. Ren, A. Wang, D.J. Lee, W. Guo, B. Liu, Y. Feng, Q. Zhao, Acid hydrolysis of corn stover for  
586 biohydrogen production using *Thermoanaerobacterium thermosaccharolyticum* W16, *Int. J. Hydrogen Energy.*  
34 (2009) 7182–7188. doi:10.1016/j.ijhydene.2009.07.009.
- 588 [45] M. Quéméneur, J. Hamelin, A. Barakat, J.P. Steyer, H. Carrre, E. Trably, Inhibition of fermentative hydrogen  
production by lignocellulose-derived compounds in mixed cultures, *Int. J. Hydrogen Energy.* 37 (2012) 3150–  
590 3159. doi:10.1016/j.ijhydene.2011.11.033.
- [46] G. Kumar, H.C. Cheon, S.H. Kim, Effects of 5-hydromethylfurfural, levulinic acid and formic acid, pretreatment  
592 byproducts of biomass, on fermentative H<sub>2</sub> production from glucose and galactose, *Int. J. Hydrogen Energy.*  
39 (2014) 16885–16890. doi:10.1016/j.ijhydene.2014.08.063.
- 594 [47] M. Möller, U. Shröder, Hydrothermal production of furfural from xylose and xylan as model compounds for  
hemicelluloses, *RSC Adv.* 3 (2013) 22253–22260. doi:10.1039/c3ra43108h.
- 596 [48] S. Larsson, A. Reimann, N.O. Nilverbrant, L. Jönsson, Comparison of different methods for the detoxification  
of lignocellulose hydrolyzates of Spruce, *Appl. Biochem. Biotechnol.* 77 (1999) 2273–2289.
- 598 [49] S. Pattra, S. Sangyoka, M. Boonmee, A. Reungsang, Bio-hydrogen production from the fermentation of  
sugarcane bagasse hydrolysate by *Clostridium butyricum*, *Int. J. Hydrogen Energy.* 33 (2008) 5256–5265.  
600 doi:10.1016/j.ijhydene.2008.05.008.
- [50] K. Zhang, N. Ren, A. Wang, Fermentative hydrogen production from corn stover hydrolyzate by two typical  
602 seed sludges : Effect of temperature, *Int. J. Hydrogen Energy.* 40 (2015) 3838–3848.  
doi:10.1016/j.ijhydene.2015.01.120.
- 604 [51] M.A.Z. Bundhoo, R. Mohee, Inhibition of dark fermentative bio-hydrogen production: A review, *Int. J.*  
*Hydrogen Energy.* 41 (2016) 6713–6733. doi:10.1016/j.ijhydene.2016.03.057.
- 606 [52] M.A. Hernández, M. Rodríguez Susa, Y. Andres, Use of coffee mucilage as a new substrate for hydrogen  
production in anaerobic co-digestion with swine manure, *Bioresour. Technol.* 168 (2014) 112–118.  
608 doi:10.1016/j.biortech.2014.02.101.
- [53] H.M. Poggi-Valardo, K.M. Munoz-Paez, C. Escamilla-Alvarado, P.N. Robledo-Narváez, M.T. Ponce-Noyola,  
610 G. Calva-Calva, E. Ríos-Leal, J. Galíndez-Mayer, C. Estrada-Vázquez, A. Ortega-Clemente, N.F.  
Rinderknecht-Seijas, Biohydrogen, biomethane and bioelectricity as crucial components of biorefinery of  
612 organic wastes: a review, *Waste Manag. Res.* 32 (2014) 353–65. doi:10.1177/0734242X14529178.
- [54] W. Han, Y. Yan, J. Gu, Y. Shi, J. Tang, Y. Li, Techno-economic analysis of a novel bioprocess combining  
614 solid state fermentation and dark fermentation for H<sub>2</sub> production from food waste, *Int. J. Hydrogen Energy.* 41  
(2016) 22619–22625. doi:10.1016/j.ijhydene.2016.09.047.
- 616 [55] W. Han, J. Fang, Z. Liu, J. Tang, Techno-economic evaluation of a combined bioprocess for fermentative  
hydrogen production from food waste, *Bioresour. Technol.* 202 (2016) 107–112.  
618 doi:10.1016/j.biortech.2015.11.072.
- [56] E. Lalaurette, S. Thammannagowda, A. Mohagheghi, P.C. Maness, B.E. Logan, Hydrogen production from  
620 cellulose in a two-stage process combining fermentation and electrohydrogenesis, *Int. J. Hydrogen Energy.*  
34 (2009) 6201–6210. doi:10.1016/j.ijhydene.2009.05.112.
- 622 [57] ECHEMI, Hydrochloric acid price market analysis, (2020).  
[https://www.echemi.com/productsInformation/pid\\_Rock19088-hydrochloric-acid.html](https://www.echemi.com/productsInformation/pid_Rock19088-hydrochloric-acid.html) (accessed May 30,

- 624 2020).
- 626 [58] Jiujiang Huirong New Materials Co. Ltd., Calcium hydroxide price, (2020). [https://www.alibaba.com/product-detail/Bulk-Calcium-Hydroxide-Price\\_60358348575.html?spm=a2700.7724857.normalList.8.5ed9172c3iyTux&s=p](https://www.alibaba.com/product-detail/Bulk-Calcium-Hydroxide-Price_60358348575.html?spm=a2700.7724857.normalList.8.5ed9172c3iyTux&s=p) (accessed May 30, 2020).
- 628 [59] Richin International Trade (Dalian) Co. Ltd., Ammonium chloride powder price, (2020). [https://www.alibaba.com/product-detail/NH4Cl-Ammonium-Chloride-Powder-For-Fertilizer\\_62560200713.html?spm=a2700.galleryofferlist.0.0.148619738dIDLo&s=p](https://www.alibaba.com/product-detail/NH4Cl-Ammonium-Chloride-Powder-For-Fertilizer_62560200713.html?spm=a2700.galleryofferlist.0.0.148619738dIDLo&s=p).
- 630 [60] Tianjin Chengyuan Chemical Co. Ltd., Trisodium phosphate dodecahydrate price, (2020). [https://www.alibaba.com/product-detail/AR-Pharma-food-grade-trisodium-phosphate\\_62596584608.html?spm=a2700.galleryofferlist.0.0.2ba17c1bSLYWLG&s=p&fullFirstScreen=true](https://www.alibaba.com/product-detail/AR-Pharma-food-grade-trisodium-phosphate_62596584608.html?spm=a2700.galleryofferlist.0.0.2ba17c1bSLYWLG&s=p&fullFirstScreen=true) (accessed May 30, 2020).
- 632 [61] Tai'an Health Chemical Co. Ltd., Zinc chloride price, (2020). [https://www.alibaba.com/product-detail/market-price-of-zinc-chloride-95\\_60473427275.html?spm=a2700.details.deiletai6.9.2f5c181dOwJnz0&bypass=true](https://www.alibaba.com/product-detail/market-price-of-zinc-chloride-95_60473427275.html?spm=a2700.details.deiletai6.9.2f5c181dOwJnz0&bypass=true) (accessed May 30, 2020).
- 634 [62] Liaoning Metals And Minerals Enterprise Co. Ltd., Magnesium chloride hexahydrate price, (2020). [https://www.alibaba.com/product-detail/Hot-seller-best-price-46-white\\_60780892964.html?bypass=true&spm=a2700.galleryofferlist.0.0.1edb5dfbTCIWBk&s=p](https://www.alibaba.com/product-detail/Hot-seller-best-price-46-white_60780892964.html?bypass=true&spm=a2700.galleryofferlist.0.0.1edb5dfbTCIWBk&s=p) (accessed May 30, 2020).
- 640 [63] Famouschem Technology (Shanghai) Co. Ltd., Manganese chloride tetrahydrate price, (2020). [https://www.alibaba.com/product-detail/Factory-price-Manganese-chloride-tetrahydrate-with\\_60793294844.html?spm=a2700.galleryofferlist.0.0.716229333KAfrf&s=p&fullFirstScreen=true](https://www.alibaba.com/product-detail/Factory-price-Manganese-chloride-tetrahydrate-with_60793294844.html?spm=a2700.galleryofferlist.0.0.716229333KAfrf&s=p&fullFirstScreen=true).
- 642 [64] Shandong Shengpeng Sodium Silicate Co. Ltd., Ferric chloride hexahydrate price, (2020). [https://www.alibaba.com/product-detail/FeCl3-Ferric-Chloride-Hexahydrate-CAS-10025\\_62123299735.html?bypass=true&spm=a2700.galleryofferlist.0.0.7545346fpVos51&s=p](https://www.alibaba.com/product-detail/FeCl3-Ferric-Chloride-Hexahydrate-CAS-10025_62123299735.html?bypass=true&spm=a2700.galleryofferlist.0.0.7545346fpVos51&s=p) (accessed May 30, 2020).
- 644 [65] Tai'an Health Chemical Co. Ltd., Copper chloride price, (2020). [https://www.alibaba.com/product-detail/copper-chloride-cucl2-2h2o\\_60029943407.html?spm=a2700.galleryofferlist.0.0.e07875d4fs9DWj&bypass=true](https://www.alibaba.com/product-detail/copper-chloride-cucl2-2h2o_60029943407.html?spm=a2700.galleryofferlist.0.0.e07875d4fs9DWj&bypass=true) (accessed May 30, 2020).
- 646 [66] Baofull Chemical Co. Limited (Liuzhou), Nickel chloride price, (2020). [https://www.alibaba.com/product-detail/Nickel-Chloride-NiCl2-6H2O\\_876085445.html?spm=a2700.galleryofferlist.0.0.2fb3505bobian1&bypass=true](https://www.alibaba.com/product-detail/Nickel-Chloride-NiCl2-6H2O_876085445.html?spm=a2700.galleryofferlist.0.0.2fb3505bobian1&bypass=true) (accessed May 30, 2020).
- 648
- 650
- 652
- 654
- 656

## 658 Abbreviations

- 660 CS corn stover
- $C_{CS}$  corn stover concentration in acid hydrolysis ( $\text{g g}^{-1}_{\text{dry base}}$ )
- 662  $C_{FVW}$  fruits-and-vegetables wastes concentration in acid hydrolysis ( $\text{g g}^{-1}_{\text{dry base}}$ )
- $C_{RS}$  reducing sugars concentration in acid hydrolysis ( $\text{g L}^{-1}$ )
- 664  $C_{RS,i}$  reducing sugars initial concentration in dark fermentation ( $\text{g L}^{-1}$ )
- $C_{RS,f}$  reducing sugars final concentration in dark fermentation ( $\text{g L}^{-1}$ )



|     |                      |  |
|-----|----------------------|--|
| 666 | $C_{H_3O^+}$         | theoretical hydronium concentration of the acid catalyst (mol $H_3O^+$ L <sup>-1</sup> ) |
|     | db                   | dry basis  |
| 668 | FVW                  | fruits-and-vegetables wastes   |
|     | $H_{cs}$             | carbohydrates content in corn stover (g g <sup>-1</sup> <sub>db</sub> )                  |
| 670 | $H_{FVW}$            | carbohydrates content in FVW (g g <sup>-1</sup> <sub>db</sub> )                          |
|     | HMF                  | hydroxymethyl-furfural   |
| 672 | $H(t)$               | cumulative hydrogen production at time 't' (mL H <sub>2</sub> )                          |
|     | $H_{max}$            | maximum cumulative hydrogen production (mL H <sub>2</sub> )                              |
| 674 | HP                   | hydrolysis potential (g mol <sup>-1</sup> H <sub>3</sub> O <sup>+</sup> )                |
|     | ISR                  | inoculum substrate ratio   |
| 676 | LH                   | liquid hydrolyzates  |
|     | $m_H$                | co-substrates mass (g)   |
| 678 | $MW_{glucose}$       | glucose molar weight (g mol <sup>-1</sup> )  |
|     | $R_{max}$            | maximum hydrogen production rate (mL H <sub>2</sub> h <sup>-1</sup> )                    |
| 680 | RS                   | reducing sugars  |
|     | $t$                  | time (h)   |
| 682 | TPC                  | total phenolic compounds   |
|     | VFA                  | volatile fatty acids   |
| 684 | VS                   | volatile solids  |
|     | $V_r$                | hydrolysis volume (L)  |
| 686 | $V_R$                | fermentation volume (L)  |
|     | $Y_{H_2}$            | hydrogen molar yield (mol H <sub>2</sub> mol <sup>-1</sup> <sub>glucose</sub> )          |
| 688 | $Y_{RS}$             | reducing sugars yield (%)  |
| 690 | <b>Greek symbols</b> |  |
|     | $\lambda$            | lag time (h)   |
| 692 |                      |  |

694 **LIST OF FIGURES**

696 Fig. 1. Influence of fruits-and-vegetables wastes to corn stover ratios, FVW:CS, and acid catalysts, HCl or H<sub>2</sub>SO<sub>4</sub>, on (A) reducing sugars production, RS, and (B) hydrolysis potential, *HP*.

698 Fig. 2. Main effects on reducing sugars production yield,  $Y_{RS}$ , by (A) fruits-and-vegetables wastes to corn stover ratios, FVW:CS, and (B) acid catalysts, HCl or H<sub>2</sub>SO<sub>4</sub>.

700 Fig. 3. Monomeric sugars production at different fruits-and-vegetables wastes to corn stover ratios, FVW:CS, by acid hydrolysis using (A) HCl, and (B) H<sub>2</sub>SO<sub>4</sub>.


702 Fig. 4. Main effects by fruits-and-vegetables wastes to corn stover ratios, FVW:CS, and acid catalysts, HCl or H<sub>2</sub>SO<sub>4</sub> on the production of HMF (A and B), furfural (C and D), and TPC (E and F).

704 Fig. 5. Cumulative hydrogen production by dark fermentation of overlimed HCl hydrolyzates from FVW:CS preparation at ISR equal to: 1.2 (A), 1.0 (B), and 0.8 (C). Reducing sugars initial concentration,  $C_{RS,i}$ , were 10 (triangle), 13 (circle), and 16 g L<sup>-1</sup> (square).


708 Fig. 6. Main effects by the reducing sugars initial concentration,  $C_{RS,i}$ , on the (A) maximum cumulative hydrogen production,  $H_{max}$ , and (B) the hydrogen molar yield,  $Y_{H_2}$ .

710

712

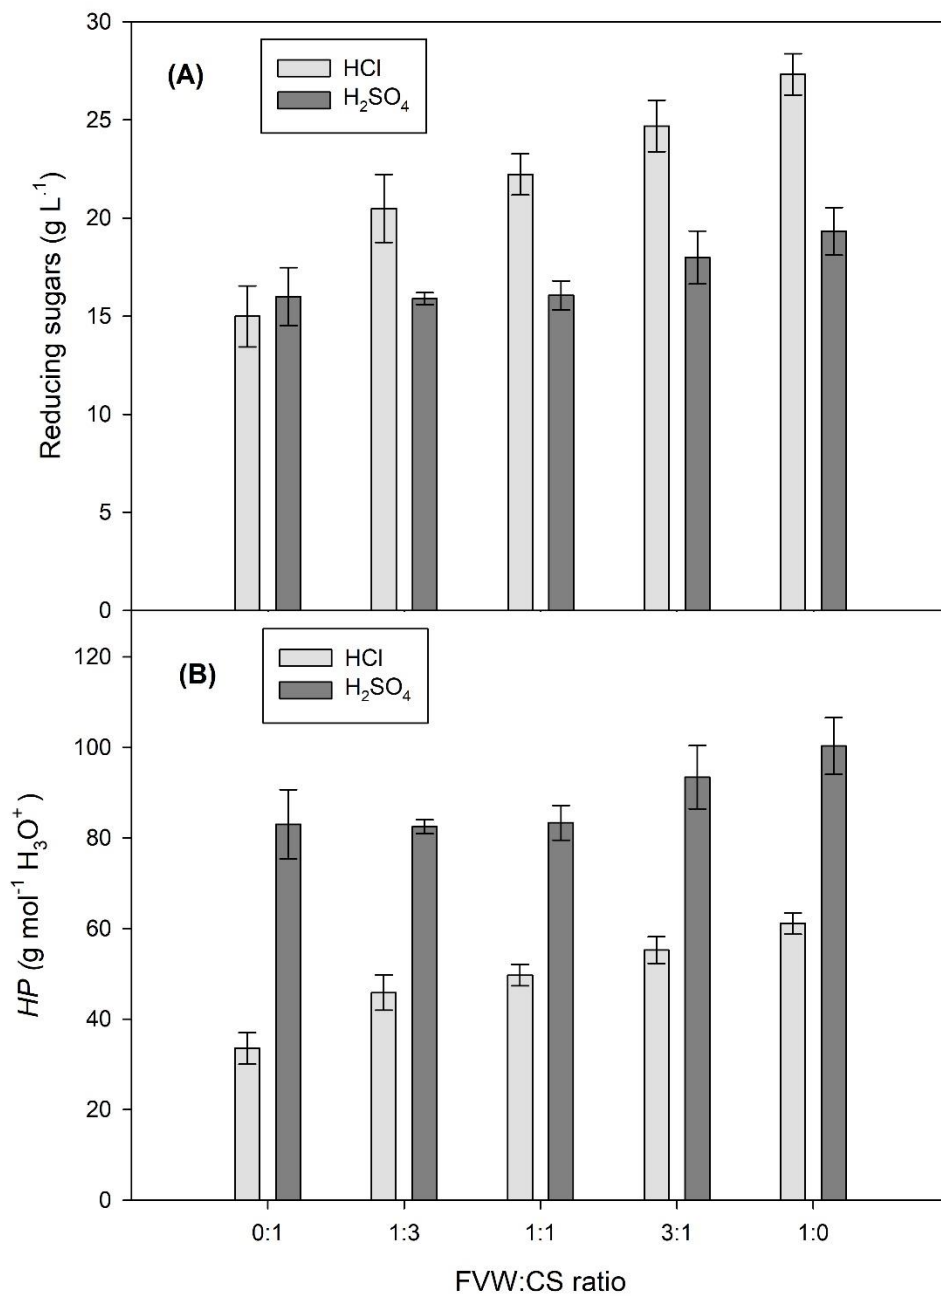

716 **Fig. 1. Influence of fruits-and-vegetables wastes to corn stover ratios, FVW:CS, and acid**  
 718 **catalysts, HCl or H<sub>2</sub>SO<sub>4</sub>, on (A) reducing sugars production, RS, and (B) hydrolysis**  
**potential, HP.**

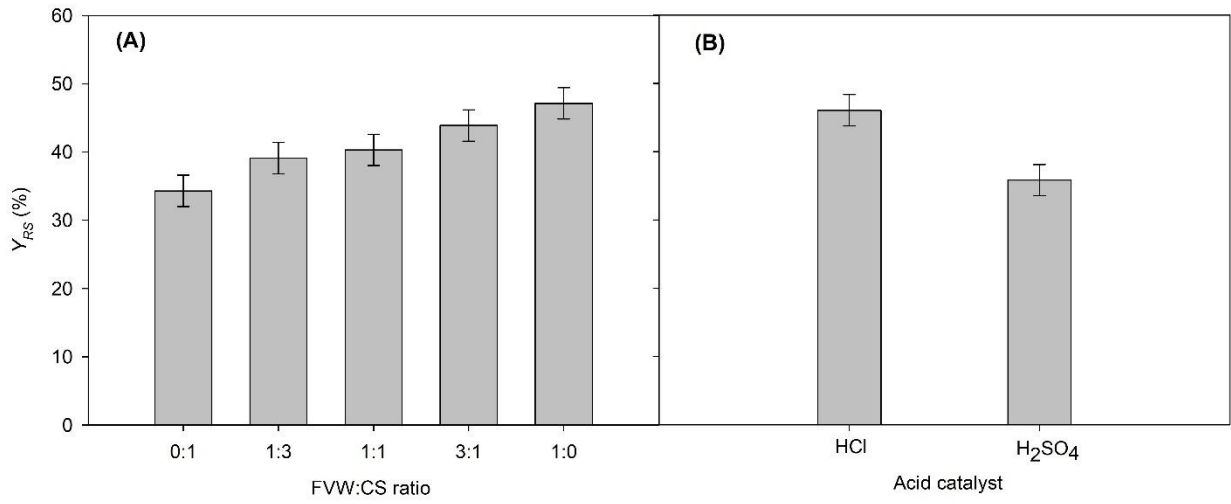


720

722

**Fig. 2. Main effects on reducing sugars production yield,  $Y_{RS}$ , by (A) fruits-and-vegetables wastes to corn stover ratios, FVW:CS, and (B) acid catalysts, HCl or H<sub>2</sub>SO<sub>4</sub>.**

724

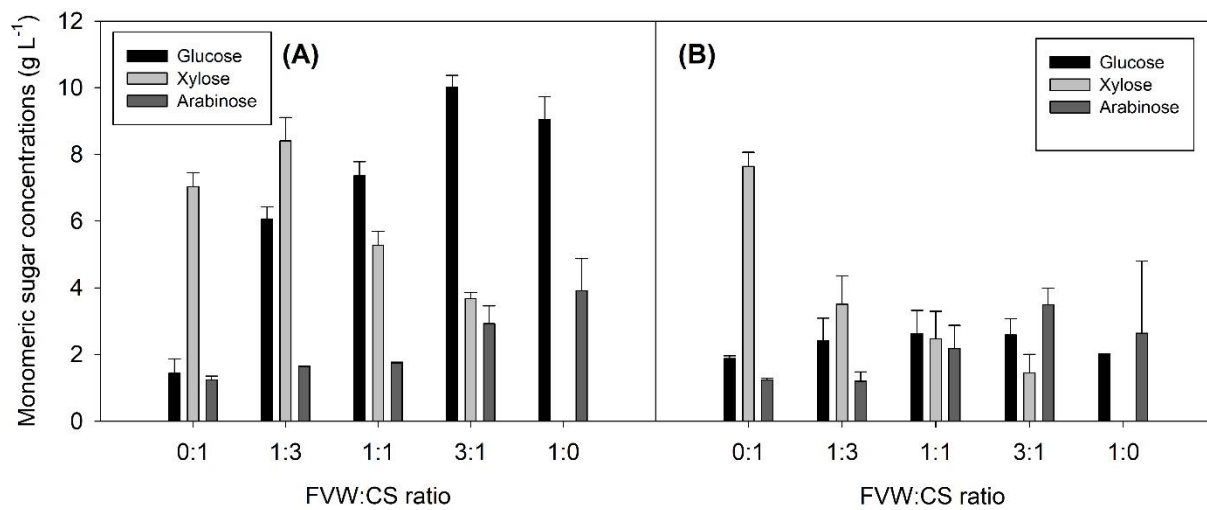


726


728

**Fig. 3. Monomeric sugars production at different fruits-and-vegetables wastes to corn stover ratios, FVW:CS, by acid hydrolysis using (A) HCl, and (B) H<sub>2</sub>SO<sub>4</sub>.**


730

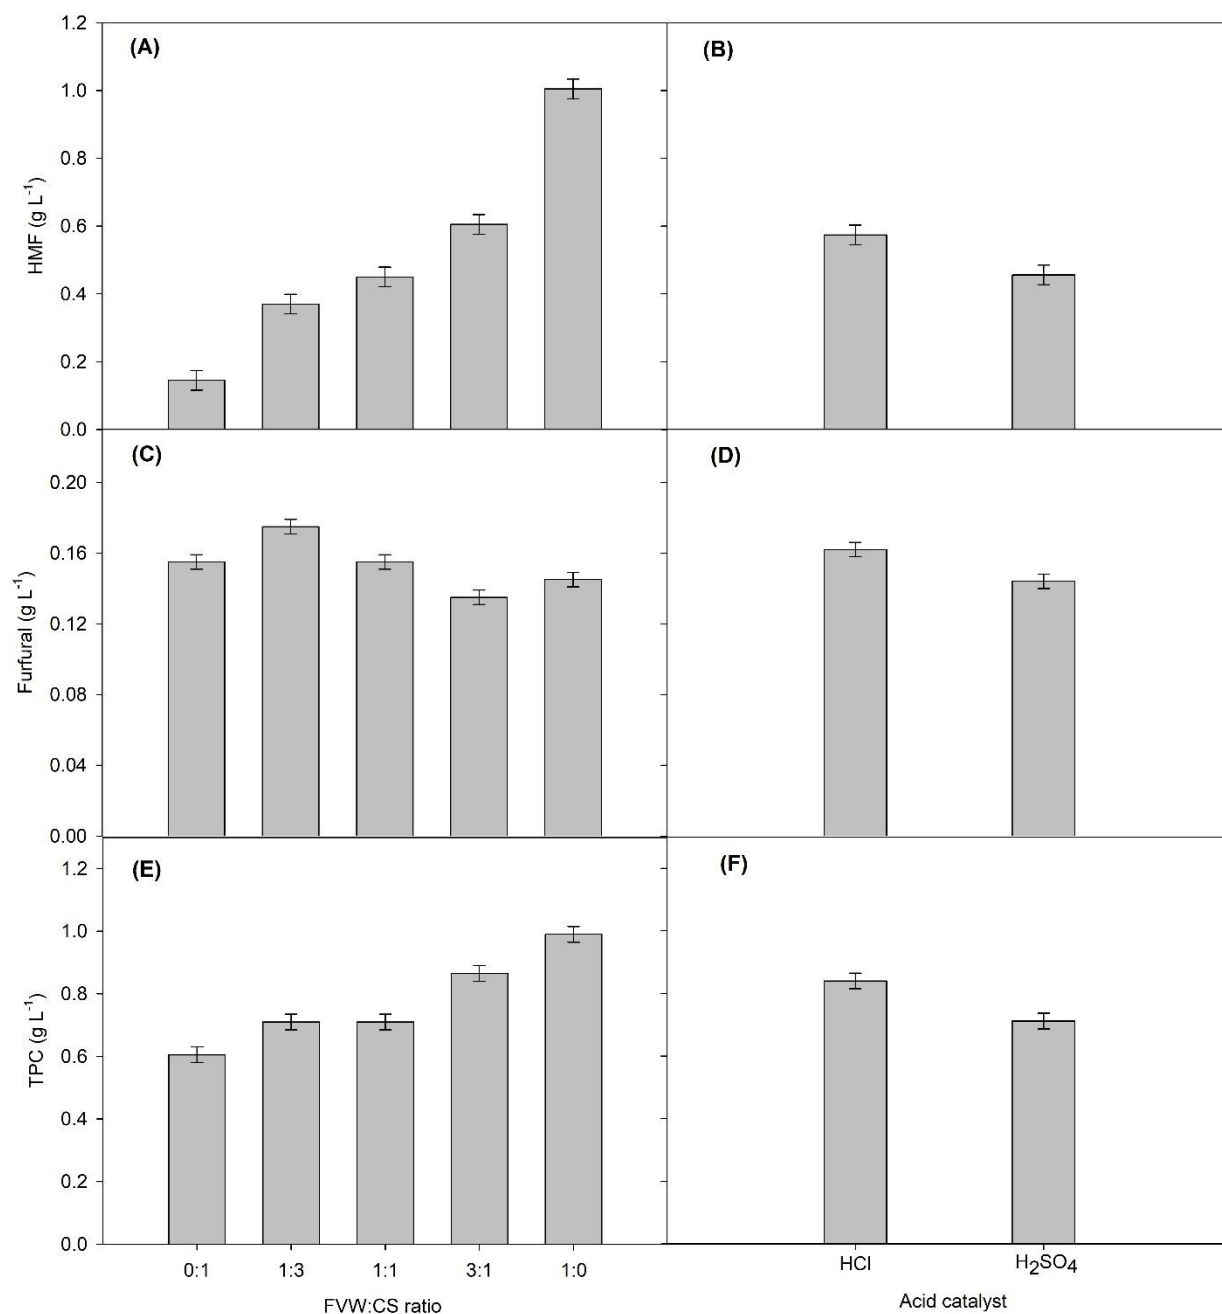

734 **Fig. 4. Main effects by fruits-and-vegetables wastes to corn stover ratios, FVW:CS, and**  
 736 **acid catalysts, HCl or H<sub>2</sub>SO<sub>4</sub> on the production of HMF (A and B), furfural (C and D), and**  
**TPC (E and F).**

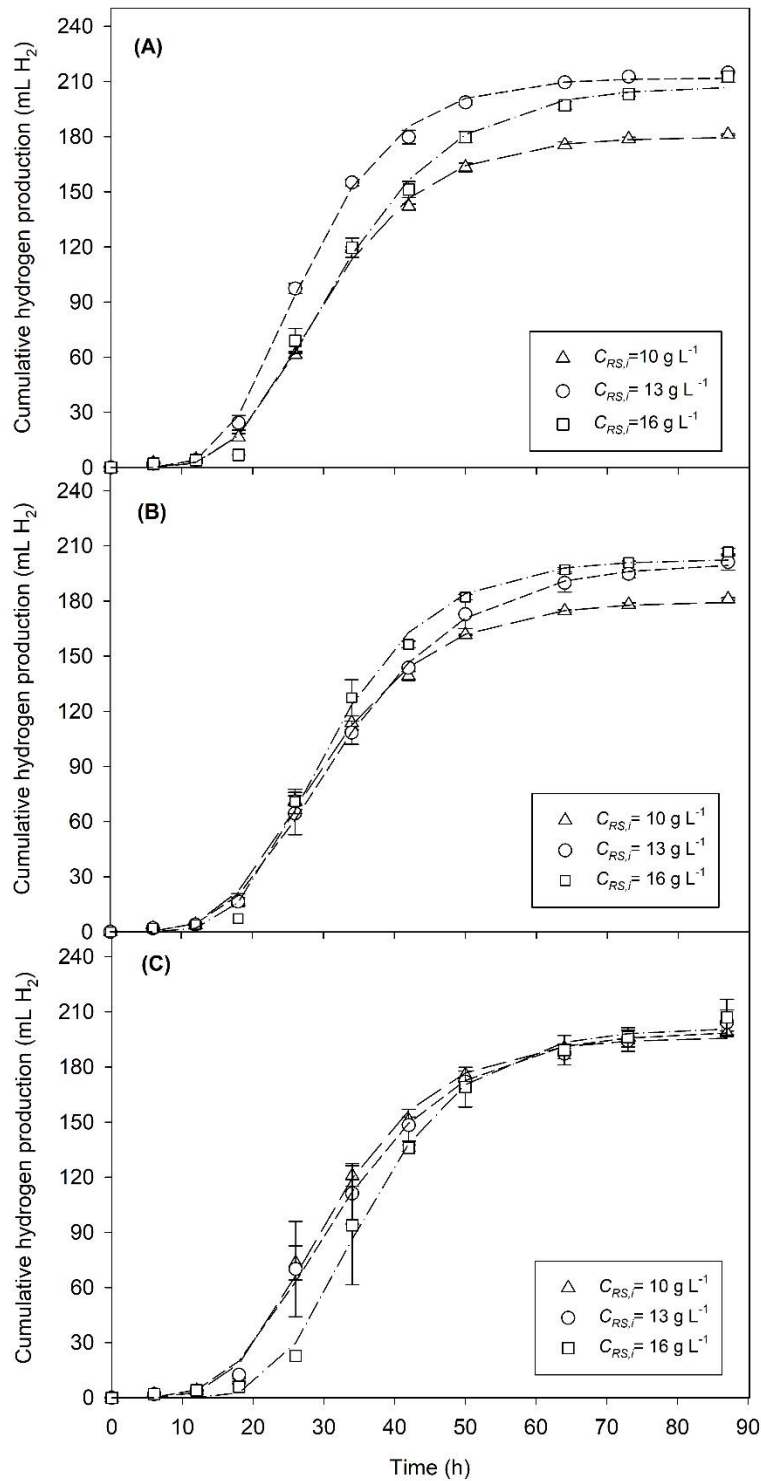

738  
 740 **Fig. 5. Cumulative hydrogen production by dark fermentation of overlimed HCl**  
 742 **hydrolyzates from FVW:CS preparation at ISR equal to: 1.2 (A), 1.0 (B), and 0.8 (C).**  
**Reducing sugars initial concentration (C<sub>RS,i</sub>) were 10 (triangle), 13 (circle), and 16 g L<sup>-1</sup>**  
**(square)**

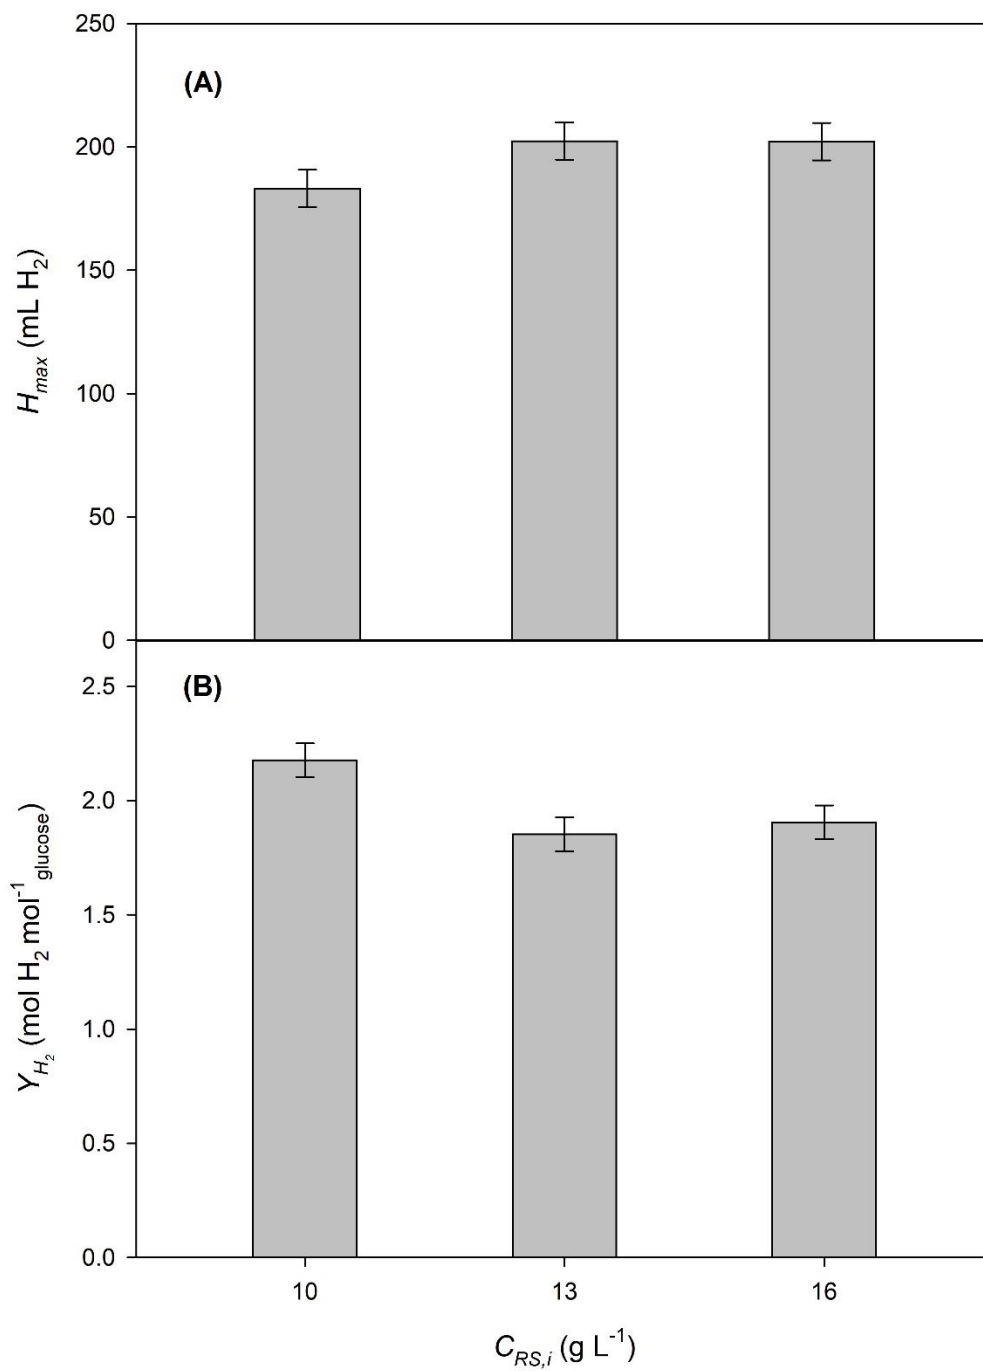

744 **Fig. 6. Main effects by the reducing sugars initial concentration,  $C_{RS,i}$ , on the (A) maximum**  
 746 **cumulative hydrogen production,  $H_{max}$ , and (B) the hydrogen molar yield,  $Y_{H_2}$ .**



## LIST OF TABLES

- 748 Table 1. Secondary products concentration from acid hydrolysis of fruits-and-vegetables wastes to corn stover ratios, FVW:CS.
- 750 Table 2. Parameters of the modified Gompertz equation of the factorial design  $3^2$  from the HCl  
752 treatment at assayed reducing sugars initial concentrations,  $C_{RS,i}$ , and inoculum to substrate ratios, ISR.
- 754 Table 3. Secondary metabolites and response variables of hydrogen production of HCl hydrolyzates, at assayed reducing sugars initial concentrations,  $C_{RS,i}$ , and inoculum to substrate ratios, ISR.
- 756 Table 4. Hydrogen production by dark fermentation of organic wastes.
- Table 5. Economic prospection of hydrogen production from FVW:CS (3:1 ratio) at lab scale.
- 758

760 **Table 1. Secondary products concentration from acid hydrolysis of fruits-and-vegetables wastes to corn stover ratios, FVW:CS.**

| <b>FVW:CS ratio and acid catalyst</b> | <b>HMF (g L<sup>-1</sup>)</b> | <b>Furfural (g L<sup>-1</sup>)</b> | <b>TPC (g L<sup>-1</sup>)</b> | <b>Formic acid (g L<sup>-1</sup>)</b> | <b>Acetic acid (g L<sup>-1</sup>)</b> | <b>Propionic acid (g L<sup>-1</sup>)</b> | <b>Succinic acid (g L<sup>-1</sup>)</b> | <b>Lactic acid (g L<sup>-1</sup>)</b> |
|---------------------------------------|-------------------------------|------------------------------------|-------------------------------|---------------------------------------|---------------------------------------|--|---|---------------------------------------|
| 0:1 HCl                               | 0.14 ±0.00                    | 0.14 ±0.00                         | 0.63 ±0.01                    | 6.13 ±0.07                            | 0.74 ±0.16                            | 0.86 ±0.00                               | 0.18 ±0.00                              | 0.18 ±0.03                            |
| 0:1 H <sub>2</sub> SO <sub>4</sub>    | 0.15 ±0.00                    | 0.17 ±0.00                         | 0.58 ±0.02                    | 5.80 ±0.49                            | 0.77 ±0.08                            | 0.75 ±0.43                               | 0.17 ±0.00                              | 0.17 ±0.00                            |
| 1:3 HCl                               | 0.47 ±0.02                    | 0.21 ±0.01                         | 0.79 ±0.02                    | 5.37 ±0.30                            | 0.84 ±0.24                            | 1.09 ±0.45                               | 0.17 ±0.01                              | 0.83 ±0.24                            |
| 1:3 H <sub>2</sub> SO <sub>4</sub>    | 0.27 ±0.04                    | 0.14 ±0.01                         | 0.63 ±0.01                    | 3.10 ±0.86                            | 0.45 ±0.09                            | 0.76 ±0.21                               | 0.16 ±0.01                              | 0.54 ±0.12                            |
| 1:1 HCl                               | 0.45 ±0.04                    | 0.17 ±0.00                         | 0.77 ±0.02                    | 3.42 ±0.87                            | 0.51 ±0.09                            | 1.05 ±0.34                               | 0.16 ±0.01                              | 0.57 ±0.49                            |
| 1:1 H <sub>2</sub> SO <sub>4</sub>    | 0.45 ±0.04                    | 0.14 ±0.01                         | 0.65 ±0.02                    | 4.29 ±0.44                            | 0.46 ±0.07                            | 1.64 ±0.15                               | 0.17 ±0.00                              | 1.15 ±0.09                            |
| 3:1 HCl                               | 0.65 ±0.01                    | 0.14 ±0.00                         | 0.90 ±0.04                    | 4.02 ±0.15                            | 0.53 ±0.01                            | 1.80 ±0.06                               | 0.16 ±0.00                              | 1.39 ±0.05                            |
| 3:1 H <sub>2</sub> SO <sub>4</sub>    | 0.56 ±0.01                    | 0.13 ±0.00                         | 0.83 ±0.12                    | 3.83 ±0.38                            | 0.48 ±0.03                            | 2.10 ±0.23                               | 0.17 ±0.00                              | 1.43 ±0.17                            |
| 1:0 HCl                               | 1.16 ±0.01                    | 0.15 ±0.01                         | 1.11 ±0.03                    | 6.30 ±0.72                            | 0.79 ±0.12                            | 3.78 ±0.37                               | 0.21 ±0.01                              | 2.99 ±0.30                            |
| 1:0 H <sub>2</sub> SO <sub>4</sub>    | 0.85 ±0.14                    | 0.14 ±0.01                         | 0.87 ±0.01                    | 6.59 ±0.58                            | 0.77 ±0.19                            | 4.27 ±0.28                               | 0.21 ±0.01                              | 3.06 ±0.53                            |

762 Notes: FVW:CS of fruits-and-vegetables wastes to corn stover ratios; HMF, Hydroxymethyl-furfural; TPC, Total phenolic compounds.

764

766

768

770

772

774 **Table 2. Parameters of the modified Gompertz equation of the factorial design 3<sup>2</sup> from the HCl treatment at assayed reducing sugars initial concentrations, C<sub>RS,i</sub>, and inoculum to substrate ratios, ISR.**

| Assay | Real values                            |     | Coded values      |     | <i>H<sub>max</sub></i><br>(mL H <sub>2</sub> ) | <i>R<sub>max</sub></i><br>(mL H <sub>2</sub> h <sup>-1</sup> ) | $\lambda$<br>(h) |
|-------|--|-----|-------------------|-----|--|--|------------------|
|       | C <sub>RS,i</sub> (g L <sup>-1</sup> ) | ISR | C <sub>RS,i</sub> | ISR |  |  |                  |
| 1     | 10                                     | 1.2 | -1                | 1   | 180  | 6.70   | 16.5             |
| 2     | 13                                     | 1.2 | 0                 | 1   | 212  | 8.83   | 15.4             |
| 3     | 16                                     | 1.2 | 1                 | 1   | 208  | 6.92   | 17.0             |
| 4     | 10                                     | 1.0 | -1                | 0   | 180  | 6.19   | 15.2             |
| 5     | 13                                     | 1.0 | 0                 | 0   | 201  | 6.13   | 16.1             |
| 6     | 16                                     | 1.0 | 1                 | 0   | 203  | 7.61   | 17.3             |
| 7     | 10                                     | 0.8 | -1                | -1  | 196  | 7.03   | 16.6             |
| 8     | 13                                     | 0.8 | 0                 | -1  | 200  | 6.34   | 16.1             |
| 9     | 16                                     | 0.8 | 1                 | -1  | 201  | 7.52   | 22.5             |

776 Note: For all experiments, R<sup>2</sup> was greater than 0.99; *H<sub>max</sub>*, maximum cumulative hydrogen production; *R<sub>max</sub>*,  
 778 maximum hydrogen production rate;  $\lambda$ , lag time (h).

780

782

784

786

**Table 3. Secondary metabolites and response variables of hydrogen production of HCl hydrolyzates, at assayed reducing sugars initial concentrations,  $C_{RS,i}$ , and inoculum to substrate ratios, ISR.**

| $C_{RS,i}$ -ISR | Final pH | Ethanol (g L <sup>-1</sup> ) | Acetic acid (g L <sup>-1</sup> ) | Propionic acid (g L <sup>-1</sup> ) | Butyric acid (g L <sup>-1</sup> ) | TVFA (g L <sup>-1</sup> ) | Volumetric productivity (mL H <sub>2</sub> L <sup>-1</sup> <sub>reactor</sub> ) | RS consumption (%) | $Y_{H_2}$ (mol H <sub>2</sub> mol <sup>-1</sup> <sub>glucose</sub> ) |
|-----------------|----------|------------------------------|----------------------------------|-------------------------------------|-----------------------------------|---------------------------|---|--------------------|--|
| 10-1.2          | 6.02     | 0.06                         | 2.30                             | 0.29                                | 4.34                              | 6.93                      | 2474  | 95.36              | 2.14   |
| 13-1.2          | 5.94     | 0.06                         | 2.42                             | 0.41                                | 5.29                              | 8.12                      | 2933  | 96.33              | 1.91   |
| 16-1.2          | 5.25     | 0.05                         | 1.30                             | 0.13                                | 1.61                              | 3.04                      | 2905  | 80.38              | 1.81   |
| 10-1.0          | 5.96     | 0.04                         | 1.92                             | 0.29                                | 3.78                              | 5.99                      | 2473  | 95.27              | 2.08   |
| 13-1.0          | 5.90     | 0.05                         | 2.01                             | 0.27                                | 5.09                              | 7.37                      | 2747  | 95.94              | 1.82   |
| 16-1.0          | 5.26     | 0.07                         | 2.00                             | 0.12                                | 3.16                              | 5.28                      | 2753  | 78.04              | 1.85   |
| 10-0.8          | 5.71     | 0.13                         | 2.10                             | 0.36                                | 3.61                              | 6.07                      | 2712  | 95.33              | 2.31   |
| 13-0.8          | 5.67     | 0.06                         | 2.09                             | 0.30                                | 5.37                              | 7.76                      | 2789  | 94.92              | 1.82   |
| 16-0.8          | 5.17     | 0.06                         | 1.88                             | 0.13                                | 2.73                              | 4.74                      | 2827  | 69.96              | 2.05   |

Notes: RS: reducing sugars; TVFA, total volatile fatty acids measured as the sum of acetic, propionic and butyric acids;  $Y_{H_2}$ , hydrogen molar yield.

788

790

792

Table 4. Hydrogen production by dark fermentation of organic wastes.

| Inoculum   | Substrate (initial concentration)                                   | Operational conditions                        | ISR    | Hydrogen production and Gompertz kinetic parameters   | Hydrogen molar yield ( $Y_{H_2}$ ) and volumetric productivity ( $P_v$ )                        | Ref       |
|--|---|---|--------|---|---|-----------|
| <i>Thermoanaerobacterium thermosaccharolyticum</i> W16 | Corn stover acid hydrolyzates (11.84 g L <sup>-1</sup> )            | V <sub>0</sub> = 50 mL<br>T=60 °C<br>t= 30 h  | 0.0123 | H <sub>max</sub> =165 mL<br>R <sub>max</sub> =5.51 mL h <sup>-1</sup><br>λ=4 h  | 2.24 mol H <sub>2</sub> mol glucose <sup>-1</sup><br>P <sub>v</sub> =3305 mL L <sup>-1</sup>    | [44]      |
| <i>Clostridium butyricum</i>                           | Sugarcane bagasse hydrolyzates (20 g L <sup>-1</sup> )              | V <sub>0</sub> = 70 mL<br>T=37 °C<br>t= 60 h  | 0.001  | H <sub>max</sub> =180 mL<br>R <sub>max</sub> =3 mL h <sup>-1</sup><br>λ=5 h   | 1.73 mol H <sub>2</sub> mol glucose <sup>-1</sup><br>P <sub>v</sub> =2571.43 mL L <sup>-1</sup> | [49]      |
| Anaerobic sludge                                       | Food waste and sewage sludge (15.5 g L <sup>-1</sup> )              | V <sub>0</sub> = 415 mL<br>T=35 °C<br>t=216 h | 0.041  | H <sub>max</sub> =359 mL<br>R <sub>max</sub> =14.93 mL h <sup>-1</sup><br>λ=6.48 h  | 0.98 mol H <sub>2</sub> mol glucose <sup>-1</sup><br>P <sub>v</sub> =796.39 mL L <sup>-1</sup>  | [13]      |
| Anaerobic sludge                                       | Corn stover steam-explosion (10.98 g L <sup>-1</sup> )              | V <sub>0</sub> = 1250 mL<br>T=35 °C<br>t=78 h | 0.4    | H <sub>max</sub> = 4138 mL<br>R <sub>max</sub> =206 mL h <sup>-1</sup><br>λ=38 h  | 2.42 mol H <sub>2</sub> mol glucose <sup>-1</sup><br>P <sub>v</sub> =3310 mL L <sup>-1</sup>    | [8]       |
| Activated sludge                                       | Corn stover acid hydrolyzates (5 g L <sup>-1</sup> )                | V <sub>0</sub> = 50 mL<br>T=37 °C<br>t= 60 h  | 0.032  | H <sub>max</sub> = 14 mL<br>R <sub>max</sub> =0.22 mL h <sup>-1</sup><br>λ=15.3 h   | 0.44 mol H <sub>2</sub> mol glucose <sup>-1</sup><br>P <sub>v</sub> = 275 mL L <sup>-1</sup>    | [50]      |
| Granular anaerobic sludge                              | Corn stover acid hydrolyzates (5 g L <sup>-1</sup> )                | V <sub>0</sub> = 50 mL<br>T=37 °C<br>t= 60 h  | 0.192  | H <sub>max</sub> = 11 mL<br>R <sub>max</sub> =0.19 mL h <sup>-1</sup><br>λ=15.4 h   | 0.35 mol H <sub>2</sub> mol glucose <sup>-1</sup><br>P <sub>v</sub> = 223.6 mL L <sup>-1</sup>  | [56]      |
| Anaerobic sludge                                       | Organic fraction of municipal solid waste (150 g kg <sup>-1</sup> ) | V <sub>0</sub> = 500 g<br>T=55 °C<br>t= 470 h | 0.068  | H <sub>max</sub> <sup>a</sup> = 331 mL<br>R <sub>max</sub> <sup>a</sup> =0.70 mL h <sup>-1</sup><br>λ <sup>a</sup> =0 h     | 0.29 mol H <sub>2</sub> mol glucose <sup>-1</sup><br>P <sub>v</sub> = 662 mL g <sup>-1</sup>    | [2]       |
| Anaerobic sludge                                       | FVW:CS acid hydrolyzates at 3:1 ratio (13 g L <sup>-1</sup> )       | V <sub>0</sub> = 70 mL<br>T=35 °C<br>t= 87 h  | 1.2    | H <sub>max</sub> <sup>a</sup> = 212 mL<br>R <sub>max</sub> <sup>a</sup> =8.83 mL h <sup>-1</sup><br>λ <sup>a</sup> =15.35 h | 1.91 mol H <sub>2</sub> mol glucose <sup>-1</sup><br>P <sub>v</sub> = 2933 mL L <sup>-1</sup>   | This work |

Notes: <sup>a</sup> Experimental data; CS, corn stover; FVW, fruits and vegetables wastes; H<sub>max</sub>, maximum cumulative hydrogen production; ISR, inoculum to substrate ratio; P<sub>v</sub>, volumetric productivity (hydrogen production/oper); R<sub>max</sub>, maximum hydrogen production rate; T, temperature (°C); t, time (h); V<sub>0</sub>, operational volume (mL); Y<sub>H<sub>2</sub></sub>, hydrogen molar yield; λ, lag time (h).

794

796

798

800

**Table 5. Economic prospection of hydrogen production from FVW:CS (3:1 ratio) at lab scale.**

| Stage                        | Component                            | Price (USD/kg) | Quantity | Unit  | Price (USD) | Ref     |
|------------------------------|--------------------------------------|----------------|----------|-------|-------------|---------|
| Raw materials                | CS                                   | 0.088          | 0.035    | kg    | -0.003      | [31]    |
|                              | FVW                                  | 0.013          | 0.965    | kg    | -0.013      | [32,33] |
| Co-substrates size reduction | Electricity                          | 0.014          | 0.089    | MJ    | -0.001      | [34]    |
| Acid hydrolysis              | HCl (30%)                            | 0.029          | 0.039    | kg    | -0.001      | [57]    |
|                              | Water                                | 0.0006         | 1.079    | kg    | -0.001      | [35]    |
|                              | Electricity                          | 0.014          | 0.322    | MJ    | -0.004      | [34]    |
| Mechanical separation        | Electricity                          | 0.014          | 0.012    | MJ    | -0.002      | [34]    |
| Overliming pretreatment      | Ca(OH) <sub>2</sub>                  | 0.12           | 0.013    | kg    | -0.002      | [58]    |
|                              | Electricity                          | 0.014          | 0.009    | MJ    | -0.0001     | [34]    |
| Dark fermentation            | NH <sub>4</sub> Cl                   | 0.11           | 0.003    | kg    | -0.0004     | [59]    |
|                              | Buffer media                         | 0.3            | 0.008    | kg    | -0.0023     | [60]    |
|                              | Water                                | 0.0006         | 0.016    | kg    | -0.00001    | [35]    |
|                              | ZnCl <sub>2</sub>                    | 0.9            | 0.0002   | kg    | -0.0002     | [61]    |
|                              | MgCl <sub>2</sub> ·6H <sub>2</sub> O | 0.1            | 0.0003   | kg    | -0.00003    | [62]    |
|                              | MnCl <sub>2</sub> ·4H <sub>2</sub> O | 2              | 0.00004  | kg    | -0.00007    | [63]    |
|                              | FeCl <sub>3</sub> ·6H <sub>2</sub> O | 2              | 0.00009  | kg    | -0.00017    | [64]    |
|                              | CuCl <sub>2</sub> ·2H <sub>2</sub> O | 2.5            | 0.00001  | kg    | -0.00003    | [65]    |
|                              | NiCl <sub>2</sub> ·6H <sub>2</sub> O | 3              | 0.0003   | kg    | -0.001      | [66]    |
|                              | H <sub>2</sub>                       | 0.0027         | 13.353   | L     | 0.036       | [39]    |
| CO <sub>2</sub>              | 0.0003                               | 6.663          | L        | 0.002 | [39]        |         |
| Total system cost            |                                      |                |          |       | -0.029      |         |
| Total revenue                |                                      |                |          |       | 0.038       |         |
| Total Net                    |                                      |                |          |       | 0.009       |         |

802

804